

Accepted 113 / 113 testcases passed

DhanaSree_2006 submitted at Aug 11, 2026 11:21

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

4 ms | Beats 67.40%

Memory

42.95 MB | Beats 82.03%

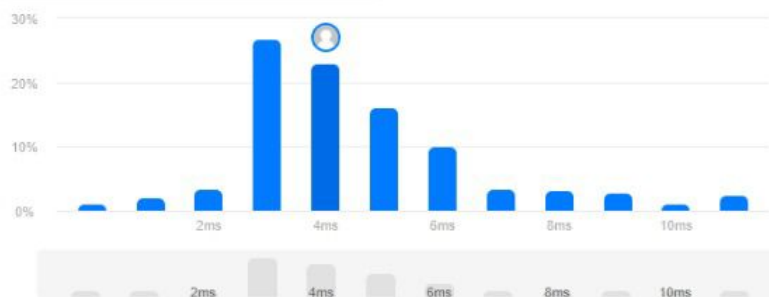

Code | Java

```
1 class Solution {
2     public boolean halvesAreAlike(String s) {
3         int mid = s.length() / 2;
4         int countA = 0, countB = 0;
5
6         for (int i = 0; i < mid; i++) {
7             if (isVowel(s.charAt(i))) {
8                 countA++;
9             }
10        }
11
12        for (int i = mid; i < s.length(); i++) {
13            if (isVowel(s.charAt(i))) {
14                countB++;
15            }
16        }
17
18        return countA == countB;
19    }
20}
```

View more

More challenges



Java | Auto



```
1 class Solution {
2     public boolean halvesAreAlike(String s) {
3         int mid = s.length() / 2;
4         int countA = 0, countB = 0;
5
6         for (int i = 0; i < mid; i++) {
7             if (isVowel(s.charAt(i))) {
8                 countA++;
9             }
10        }
11
12        for (int i = mid; i < s.length(); i++) {
13            if (isVowel(s.charAt(i))) {
14                countB++;
15            }
16        }
17
18        return countA == countB;
19    }
20}
```

Saved

Ln 1, Col

Testcase | Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

```
s =
"book"
```

Output

true

Expected

true

Contribute a testcase

Problem

Alice and Bob each created one problem for HackerRank. A reviewer rates the two challenges, awarding points on a scale from 1 to 100 for three categories: problem clarity, originality, and difficulty.

The rating for Alice's challenge is the triplet $a = (a[0], a[1], a[2])$, and the rating for Bob's challenge is the triplet $b = (b[0], b[1], b[2])$.

The task is to calculate their comparison points by comparing each category:

- If $a[i] > b[i]$, then Alice is awarded 1 point.
- If $a[i] < b[i]$, then Bob is awarded 1 point.
- If $a[i] = b[i]$, then neither person receives a point.

Example

$a = [1, 2, 3]$
 $b = [3, 2, 1]$

- For elements $a[0]$, Bob is awarded a point because $a[0] < b[0]$.
- For the equal elements $a[1]$ and $b[1]$, no points are earned.
- Finally, for elements $a[2]$, $a[2] > b[2]$ so Alice receives a point.

The return array is $[1, 1]$ with Alice's score first and Bob's second.

Function Description

Complete the function `compareTriplets` with the following parameter(s):

- `int a[3]`: Alice's challenge rating
- `int b[3]`: Bob's challenge rating

Returns

- `int[2]`: the first element is Alice's score and the second is Bob's score

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#) [Next Challenge](#)

Test case 0 ☒

Test case 1 ☒

Test case 2 ☒

Test case 3 ☒

Test case 4 ☒

Test case 5 ☒

Test case 6 ☒

Compiler Message

Success

Input (stdin)

1 5 6 7
2 3 6 10

Expected Output

1 1 1


[Download](#) [Download](#)

Accepted 79 / 79 testcases passed

DhanaSree_2006 submitted at Aug 11, 2026 11:59

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

17 ms | Beats 76.23%

Memory

107.97 MB | Beats 48.78%

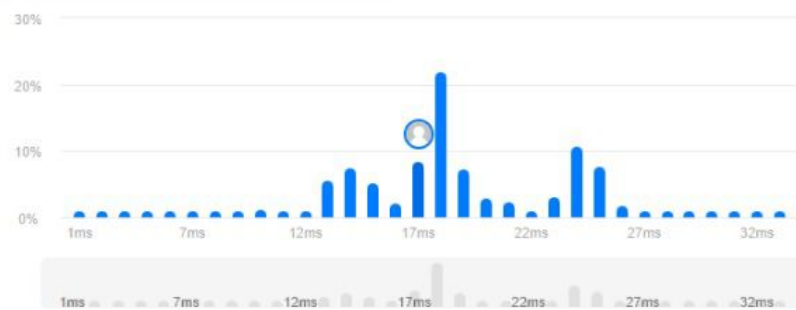

Code | Java

```
1 import java.util.HashSet;
2
3 class Solution {
4     public boolean containsDuplicate(int[] nums) {
5         HashSet<Integer> seen = new HashSet<>();
6
7         for (int num : nums) {
8
```

View more

More challenges

Java Auto

```
1 import java.util.HashSet;
2
3 class Solution {
4     public boolean containsDuplicate(int[] nums) {
5         HashSet<Integer> seen = new HashSet<>();
6
7         for (int num : nums) {
8
9             if (seen.contains(num)) {
10                 return true;
11             }
12             seen.add(num);
13         }
14     }
15 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

```
nums =
[1,2,3,1]
```

Output

true

Expected

true

Contribute a testcase

Problem

Given a time in 12-hour AM/PM format, convert it to military (24-hour) time.

Note: - 12:00:00AM on a 12-hour clock is 00:00:00 on a 24-hour clock.
- 12:00:00PM on a 12-hour clock is 12:00:00 on a 24-hour clock.

Example

- `s = '12:01:00PM'`
Return '12:01:00'.
- `s = '12:01:00AM'`
Return '00:01:00'.

Function Description

Complete the `timeConversion` function with the following parameter(s):

- `string s`: a time in 12 hour format

Returns

- `string`: the time in 24 hour format

Input Format

A single string `s` that represents a time in 12-hour clock format (i.e.: `hh:mm:ssAM` or `hh:mm:ssPM`).

Constraints

- All input times are valid

Sample Input 0

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#) [Next Challenge](#)

Test case 0 ✓ [🔒](#)

Test case 1 ✓ [🔒](#)

Test case 2 ✓ [🔒](#)

Test case 3 ✓ [🔒](#)

Test case 4 ✓ [🔒](#)

Test case 5 ✓ [🔒](#)

Test case 6 ✓ [🔒](#)

Compiler Message

Success

Input (stdin) [Download](#)

```
1 07:05:45PM
```

Expected Output [Download](#)


```
1 19:05:45
```

Accepted 75 / 75 testcases passed

DhanaSree_2006 submitted at Aug 11, 2026 12:06

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

2 ms Beats 92.06%

Memory

47.78 MB Beats 57.66%

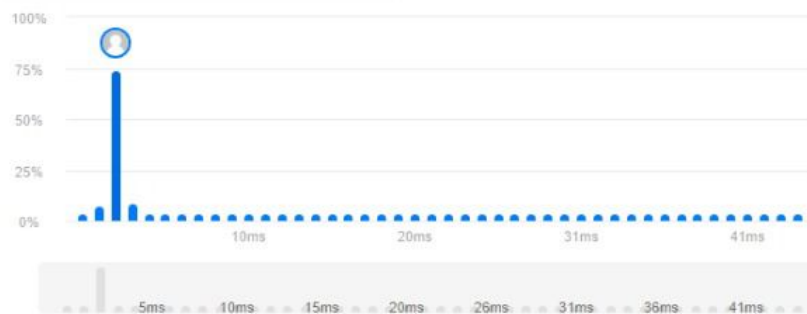

Code | Java

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int lastNonZeroFoundAt = 0;
4
5
6         for (int i = 0; i < nums.length; i++) {
7             if (nums[i] != 0) {
8                 int temp = nums[lastNonZeroFoundAt];
```

[View more](#)[More challenges](#)

Java Auto

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int lastNonZeroFoundAt = 0;
4
5
6         for (int i = 0; i < nums.length; i++) {
7             if (nums[i] != 0) {
8                 int temp = nums[lastNonZeroFoundAt];
9                 nums[lastNonZeroFoundAt] = nums[i];
10                nums[i] = temp;
11                lastNonZeroFoundAt++;
12            }
13        }
14    }
15 }
```

Saved

☒ Testcase [Test Result](#)

Accepted Runtime: 0 ms

☒ Case 1 ☒ Case 2

Input

```
nums =
[0,1,0,3,12]
```

Output

```
[1,3,12,0,0]
```

Expected

```
[1,3,12,0,0]
```

[Contribute a testcase](#)

Problem

Given a square matrix, calculate the absolute difference between the sums of its diagonals.

For example, the square matrix `arr` is shown below:

```
1 2 3
4 5 6
9 8 9
```

- The left-to-right diagonal = $1 + 5 + 9 = 15$.
- The right-to-left diagonal = $3 + 5 + 9 = 17$.

Their absolute difference is $|15 - 17| = 2$.

Function description

Complete the `diagonalDifference` function with the following parameter:

- `int arr[n][m]`: a 2-D array of integers

Return

- `int`: the absolute difference in sums along the diagonals

Input Format

The first line contains a single integer, `n`, the number of rows and columns in the square matrix `arr`.

Each of the next `n` lines describes a row, `arr[i]`, and consists of `n` space-separated integers `arr[i][j]`.

Constraints

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#) [Next Challenge](#)

- Test case 0
- Test case 1
- Test case 2
- Test case 3
- Test case 4
- Test case 5
- Test case 6

Compiler Message

Success

Input (stdin)

```
1 3
2 11 2 4
3 4 5 6
4 10 8 -12
```

Download

Expected Output

```
1 15
```

Download

Accepted 36 / 36 testcases passed

DhanaSree_2006 submitted at Aug 11, 2026 12:09

Analysis

Solution

₹583.25/mo
Save over 66%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

46.66 MB | Beats 69.42%

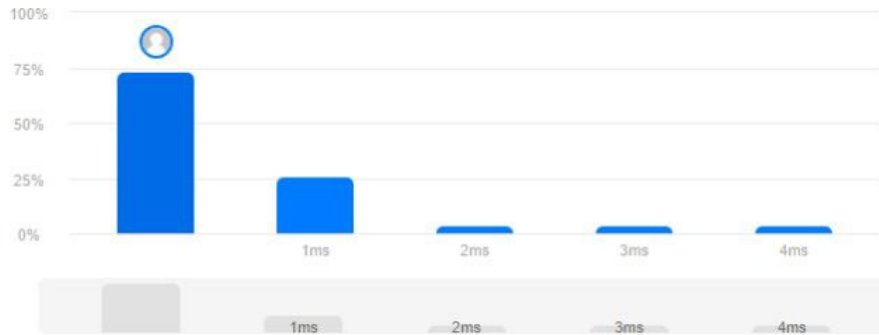

Code | Java

```
1 class Solution {
2     public int[][] transpose(int[][] matrix) {
3         int m = matrix.length;
4         int n = matrix[0].length;
5
6
7         int[][] result = new int[n][m];
8     }
```

View more

```
1 class Solution {
2     public int[][] transpose(int[][] matrix) {
3         int m = matrix.length;
4         int n = matrix[0].length;
5
6
7         int[][] result = new int[n][m];
8
9         for (int i = 0; i < m; i++) {
10             for (int j = 0; j < n; j++) {
11                 result[j][i] = matrix[i][j];
12             }
13         }
14
15         return result;
16     }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

matrix =
[[1,2,3],[4,5,6],[7,8,9]]

Output

[[1,4,7],[2,5,8],[3,6,9]]

Expected

[[1,4,7],[2,5,8],[3,6,9]]


Contribute a testcase

Accepted 12 / 12 testcases passed

DhanaSree_2006 submitted at Aug 11, 2026 12:12

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

6 ms Beats 94.60%

Memory

46.55 MB Beats 82.38%



Code | Java

```
1 class Solution {
2     public int[][] matrixBlockSum(int[][] mat, int k) {
3         int m = mat.length;
4         int n = mat[0].length;
5
6         // Construct 2D prefix sum array with 1-based indexing
7         int[][] dp = new int[m + 1][n + 1];
8         for (int i = 0; i < m; i++) {
```

View more

More challenges

```
21         int c2 = Math.min(n - 1, j + k);
22
23         // Map 0-indexed boundaries to 1-indexed prefix sum coordinates
24         int r1_dp = r1, r2_dp = r2 + 1;
25         int c1_dp = c1, c2_dp = c2 + 1;
26
27         // Calculate block sum in O(1) time
28         answer[i][j] = dp[r2_dp][c2_dp] - dp[r1_dp][c2_dp] - dp[r2_dp][c1_dp] + dp[r1_dp][c1_dp];
29     }
30 }
31
32 return answer;
33
34 }
35
```

Saved

Ln 34, Col 2

Testcase Test Result

Case 1

Case 2

Input

mat =
[[1,2,3],[4,5,6],[7,8,9]]

k =

1

Output

[[12,21,16],[27,45,33],[24,39,28]]


Expected

[[12,21,16],[27,45,33],[24,39,28]]

Contribute a testcase

You are given a 2D matrix of dimension $m \times n$ and a positive integer r . You have to rotate the matrix r times and print the resultant matrix. Rotation should be in anti-clockwise direction.

Rotation of a 4×5 matrix is represented by the following figure. Note that in one rotation, you have to shift elements by one step only.

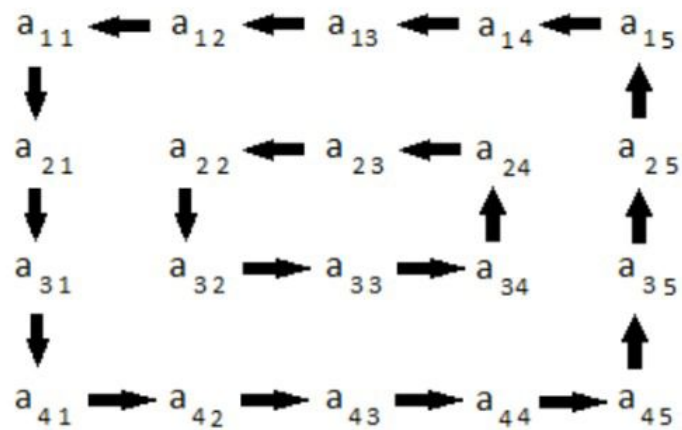

Matrix Rotation

It is guaranteed that the minimum of m and n will be even.

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#)

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

```
1 4 4 1
2 1 2 3 4
3 5 6 7 8
4 9 10 11 12
5 13 14 15 16
```

Download

Expected Output

```
1 2 3 4 8
```

Download