

Accepted 208 / 208 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 15:05

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

0 ms | Beats 100.00%

Memory

44.16 MB | Beats 75.86%



Code | Java

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val) { this.val = val; }
8  * }
```

Java Auto

```
public class ListNode {
4     int val;
5     ListNode next;
6     ListNode() {}
7     ListNode(int val) { this.val = val; }
8     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
9 }
10
11 class Solution {
12     public ListNode mergeTwoLists(ListNode list1, ListNode list2) {
13         ListNode temp = new ListNode(-1);
14         ListNode tail = temp;
15
16         while (list1 != null && list2 != null) {
17             if (list1.val <= list2.val) {
```

Saved

Testcase > Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

```
list1 =
[1,2,4]
```

```
list2 =
[1,3,4]
```

Output

```
[1,1,2,3,4,4]
```

Accepted 62 / 62 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 15:21

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

0 ms | Beats 100.00%

Memory

46.58 MB | Beats 16.93%



Code | Java

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val) { this.val = val; }
8  *     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
```

View more

```
6  *     ListNode() {}
7  *     ListNode(int val) { this.val = val; }
8  *     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
9  * }
10 */
11 class Solution {
12     public ListNode reverseKGroup(ListNode head, int k) {
13
14         ListNode cursor = head;
15         int count = 0;
16         while (cursor != null && count < k) {
17             cursor = cursor.next;
18             count++;
19         }
20         if (count < k) {
21             return head;
22         }
```

Saved

Testcase > Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

head =
[1,2,3,4,5]

k =
2

Output

[2,1,4,3,5]

Expected

[2,1,4,3,5]

Accepted 28 / 28 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 15:18

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

0 ms | Beats 100.00%

Memory

44.07 MB | Beats 84.43%

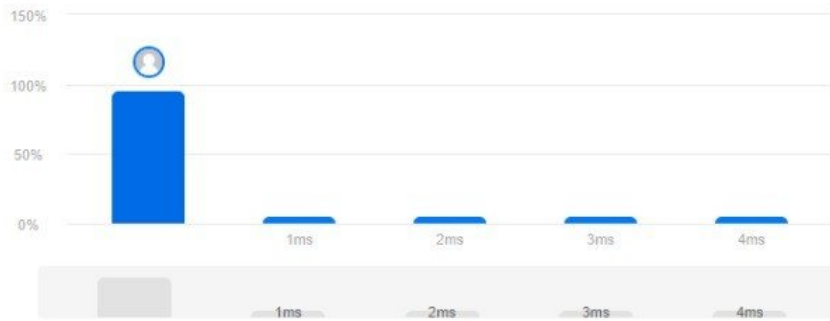

Code | Java

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val) { this.val = val; }
8  *     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
9  */
```

View more

More challenges

```
14     ListNode current = head;
15
16     while (current != null) {
17         ListNode nextTemp = current.next;
18         current.next = prev;
19         prev = current;
20         current = nextTemp;
21     }
22
23     return prev;
24 }
25 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

head =
[1,2,3,4,5]

Output

[5,4,3,2,1]

Expected

[5,4,3,2,1]

Contribute a testcase

Accepted 36 / 36 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:43

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan. →

Runtime

0 ms | Beats 100.00%

Memory

42.44 MB | Beats 97.21%



Code | Java

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
```

Java Auto

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val) { this.val = val; }
8  *     ListNode(int val, ListNode next) { this.val = val; this.next = next; }
9  * }
10 */
11 class Solution {
12     public ListNode middleNode(ListNode head) {
13         ListNode slow, fast;
14         slow = fast = head;
15         while (fast != null && fast.next != null) {
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

head =
[1,2,3,4,5]

Output

[3,4,5]

Expected


[3,4,5]

Accepted 93 / 93 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:55

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

4 ms Beats 66.28%

Memory

94.08 MB Beats 94.81%



Code | Java

```
1 /**
2  * Definition for singly-linked list.
3  * public class ListNode {
4  *     int val;
5  *     ListNode next;
6  *     ListNode() {}
7  *     ListNode(int val, ListNode next) {
8  *         this.val = val;
9  *         this.next = next;
10 *     }
11 * }
```

Code

Java Auto

```
28 private boolean isPalindrome(ListNode head) {
29     // Edge case: empty list or single node
30     while (secondHalf != null) {
31         if (firstHalf.val != secondHalf.val) {
32             return false;
33         }
34         firstHalf = firstHalf.next;
35         secondHalf = secondHalf.next;
36     }
37     return true;
38 }
39
40
41
42 private ListNode reverse(ListNode head) {
43     ListNode prev = null;
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

head =
[1,2,2,1]

Output

true

Expected

true

Accepted 477 / 477 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:37

Analysis

Solution

₹583.25/mo
Save over 66%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

0 ms | Beats 100.00%

Memory

48.37 MB | Beats 38.15%



Code | Java

```
1 class Solution {
2     public void reverseString(char[] s) {
3         int left = 0;
4         int right = s.length - 1;
5
6         while (left < right) {
7             char temp = s[left];
```

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

```
s =
["h","e","l","l","o"]
```

Output

```
["o","l","l","e","h"]
```

Expected

```
["o","l","l","e","h"]
```

Contribute a testcase

Accepted 75 / 75 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:30

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

2 ms | Beats 92.03%

Memory

48.12 MB | Beats 6.93%

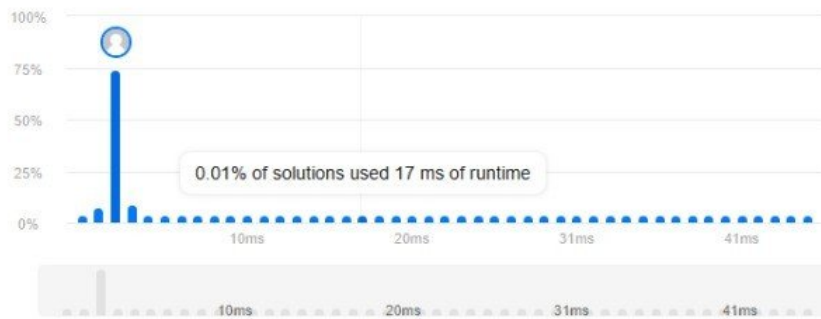

Code | Java

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int j = 0;
4
5         for (int i = 0; i < nums.length; i++) {
6             if (nums[i] != 0) {
7                 nums[j] = nums[i];
8                 j++;
9             }
10        }
```

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int j = 0;
4
5         for (int i = 0; i < nums.length; i++) {
6             if (nums[i] != 0) {
7                 int temp = nums[i];
8                 nums[i] = nums[j];
9                 nums[j] = temp;
10                j++;
11            }
12        }
13    }
14 }
```

Saved

Testcase Test Result

Case 1

Case 2

Input

nums =
[0,1,0,3,12]

Output

[1,3,12,0,0]

Expected

[1,3,12,0,0]

Contribute a testcase

Description | Accepted X | Editorial | Solutions | Submissions

All Submissions

Accepted 107 / 107 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:20

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

6 ms | Beats 84.60%

Memory

47.20 MB | Beats 13.30%

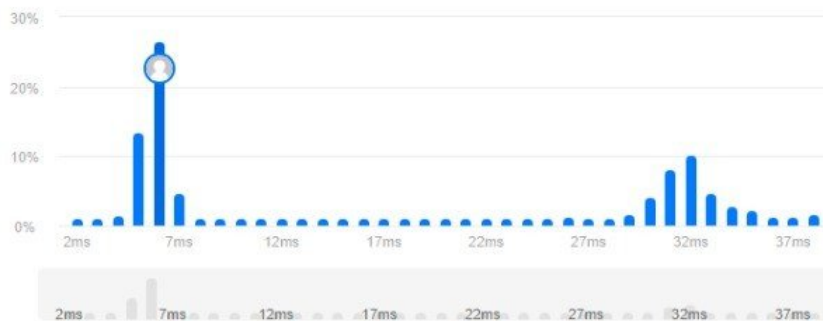

Code | Java

```
1 class Solution {
2     public int firstUniqChar(String s) {
3         int[] h = new int[26];
4         for (char c : s.toCharArray()) {
5             h[c - 'a']++;
6         }
7     }
8 }
```

Code

Java Auto

```
1 class Solution {
2     public int firstUniqChar(String s) {
3         int[] h = new int[26];
4         for (char c : s.toCharArray()) {
5             h[c - 'a']++;
6         }
7         for (int i = 0; i < s.length(); i++) {
8             if (h[s.charAt(i) - 'a'] == 1) {
9                 return i;
10            }
11        }
12        return -1;
13    }
14 }
```

Saved

Testcase Test Result

Case 1

Case 2

Case 3

Input

s =
"leetcode"

Output

0

Expected

0

Contribute a testcase

All Submissions

Accepted 212 / 212 testcases passed

kimidibindhu2 submitted at Aug 13, 2026 14:07

Analysis

Solution



Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

2 ms | Beats 42.34%

Memory

94.36 MB | Beats 71.49%



Code | Java

```
1 class Solution {
2     public int maxProfit(int[] prices) {
3         if (prices == null || prices.length == 0) {
4             return 0;
5         }
6     }
```

Java Auto

```
1 class Solution {
2     public int maxProfit(int[] prices) {
3         if (prices == null || prices.length == 0) {
4             return 0;
5         }
6
7         int minPrice = prices[0];
8         int profit = 0;
9
10        for (int i = 1; i < prices.length; i++) {
11            int cost = prices[i] - minPrice;
12            profit = Math.max(profit, cost);
13            minPrice = Math.min(minPrice, prices[i]);
14        }
15
16        return profit;
17    }
18 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

prices =
[7,1,5,3,6,4]