

Aim:
To perform CRUD operation on a graph Database.

CREATE - modes of Relationship.

```
CREATE (s1: Student {id: 1}, name: 'Sanjay', age: 21);
CREATE (s2: Student {id: 2}, name: 'Jaipal', age: 23);
CREATE (c1: Course {id: 101, name: 'Computer Science'});
CREATE (s1) - (c1) ENROLLED - IN -> (c1);
CREATE (s2) - (c1) ENROLLED - IN -> (c1);
```

READ - Query data

MATCH (s: Student - (ENROLLED - IN) => c: Course RETURN s.Name, c.Name

Output :-

Sanjay -> Computer Science.

Rahul => Data Structure.

Update

MATCH (s: Student {name: 'Sanjay'})

Set s.age = 22, s.city = Hyderabad

Return;

Name: Sanjay

age: 22 - 1 Computer Science.

City: Hyderabad

Delete

MATCH (s: Student {name: 'Rahul'})

(s: ENROLLED - u) -> (c: Course)

Delete;

Sanjay - ENROLLED - IN -> Computer Science


VEL TECH - CSE

EX NO.	11
PERFORMANCE (5)	5
RESULT AND ANALYSIS (5)	5
VIVA VOCE (5)	5
RECORD (5)	1
TOTAL (20)	15
SIGN WITH DATE	17/10/15


Action

Result :-

The Implementation of CRUD operation like Creation updating, Reading & deleting, operations using graphdb is successfully Executed.

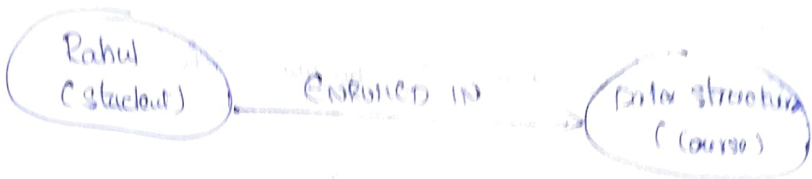

UPDATE

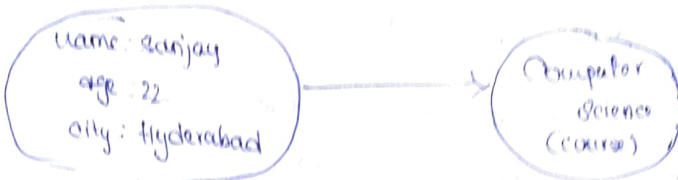

DELETE

