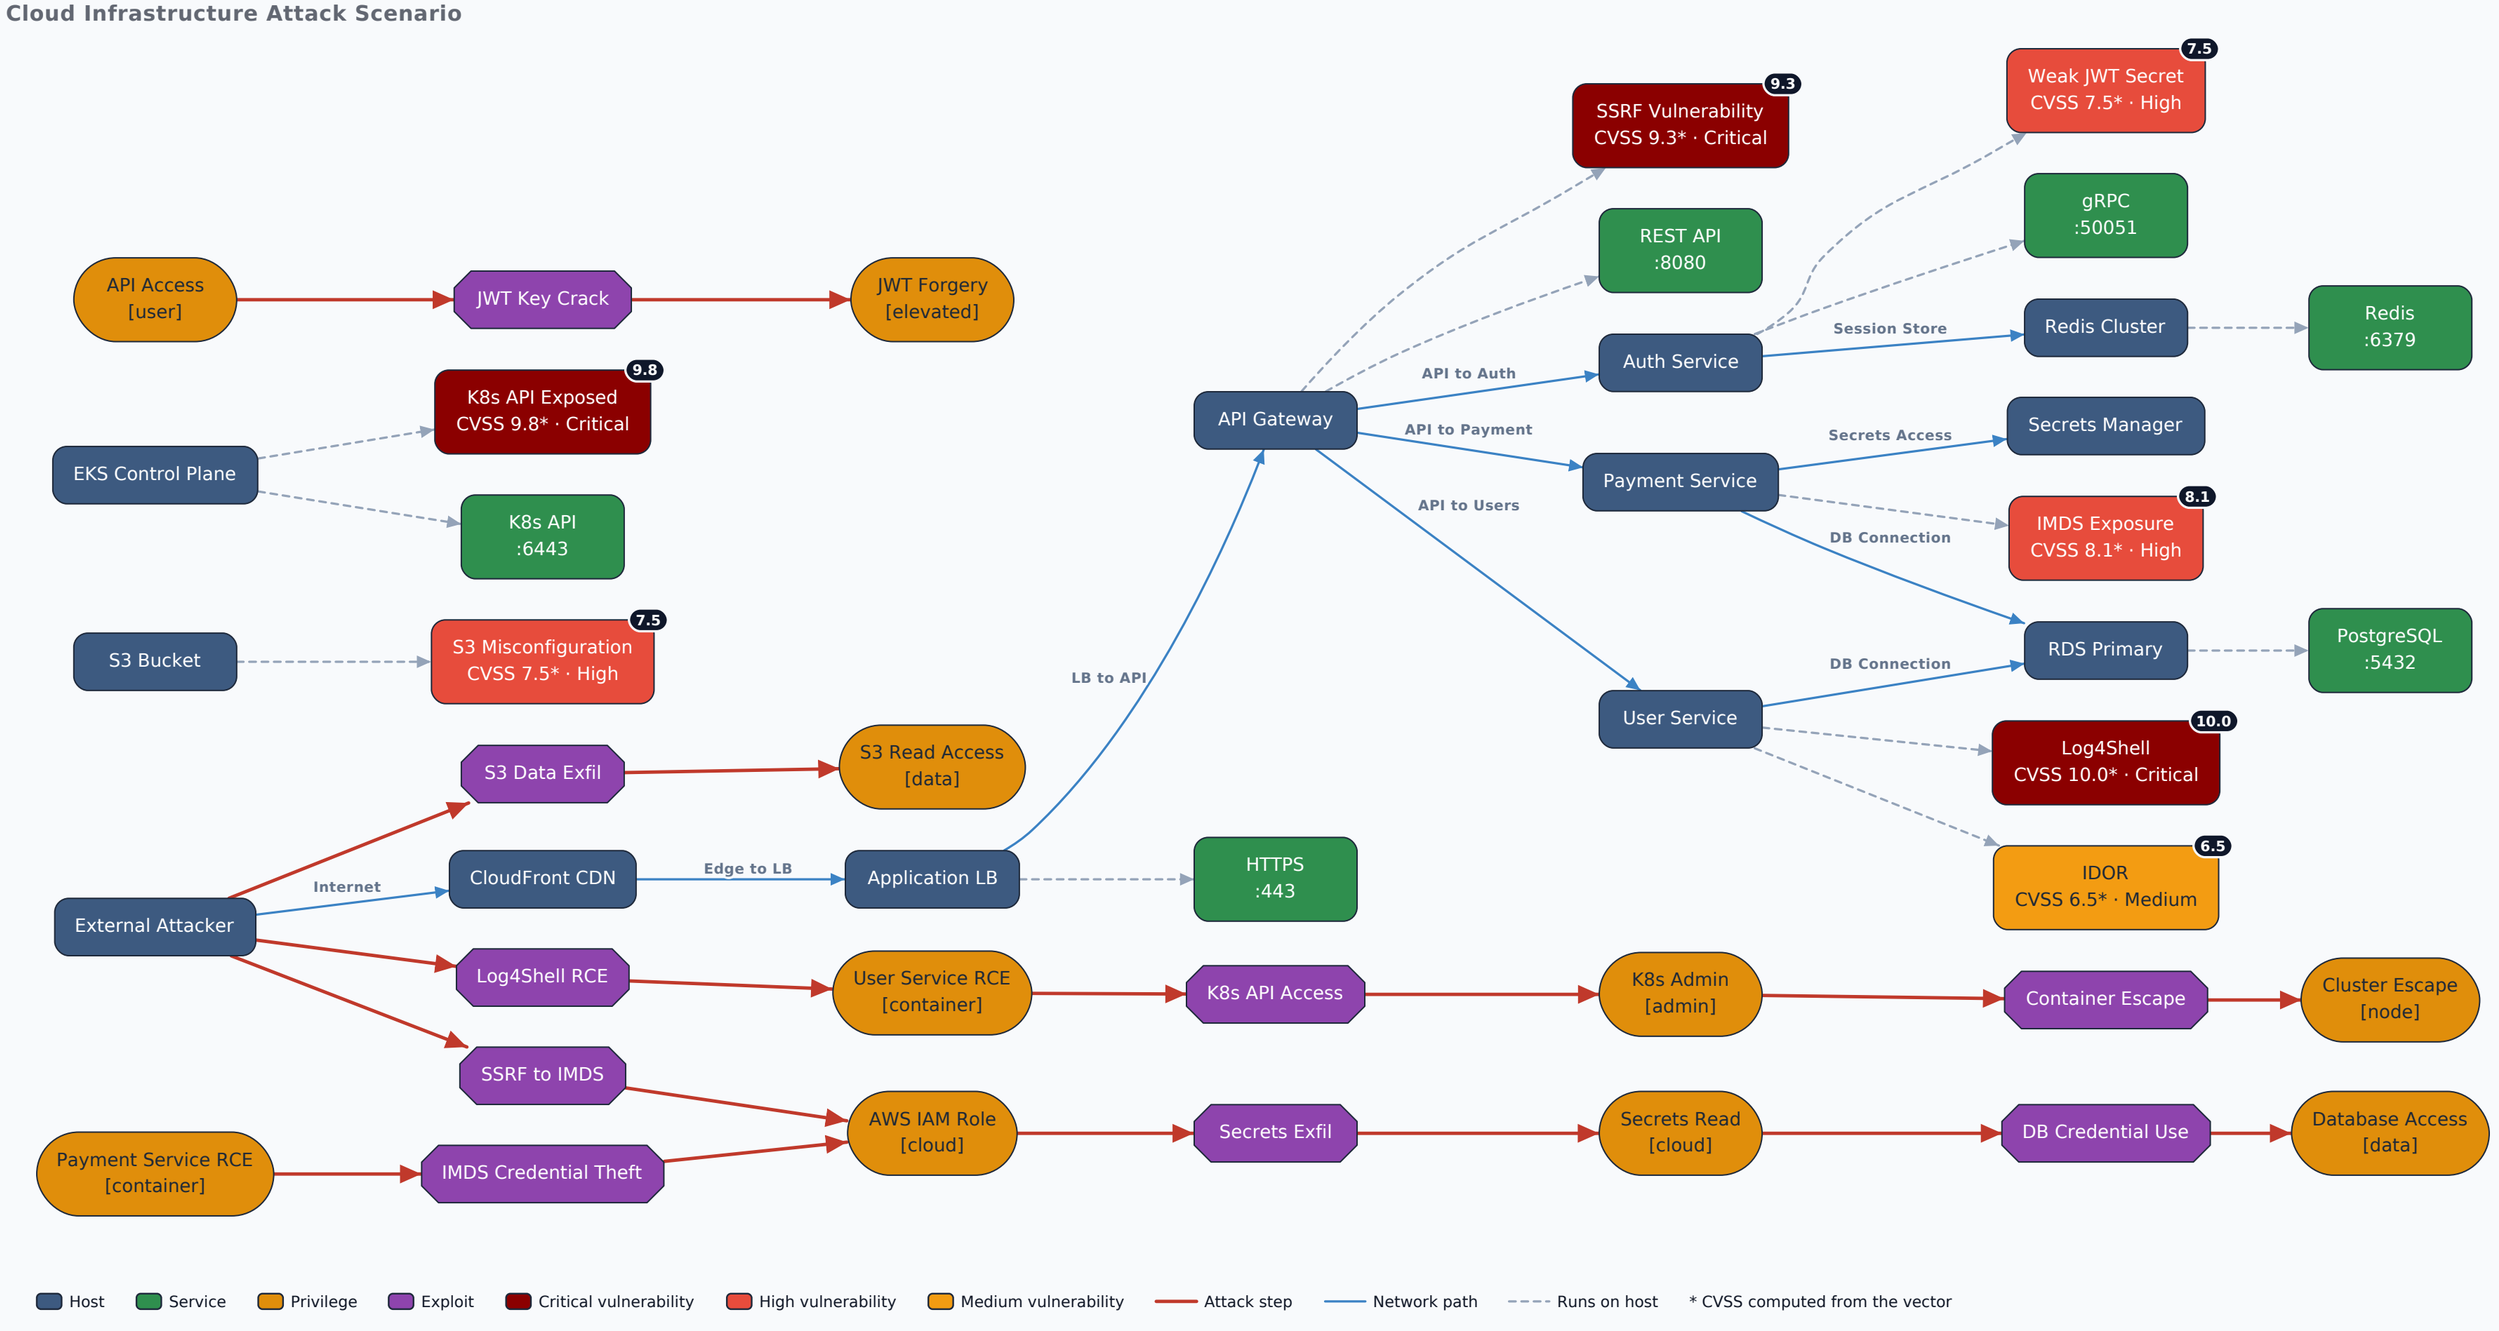

Cloud Infrastructure Attack Scenario
API Access [user]
JWT Key Crack
JWT Forgery [elevated]
EKS Control Plane
K8s API Exposed CVSS 9.8* · Critical
9.8
K8s API :6443
S3 Bucket
S3 Misconfiguration CVSS 7.5* · High
7.5
S3 Data Exfil
S3 Read Access [data]
External Attacker
Internet
CloudFront CDN
Edge to LB
Application LB
LB to API
HTTPS :443
Log4Shell RCE
User Service RCE [container]
SSRF to IMDS
Payment Service RCE [container]
IMDS Credential Theft
AWS IAM Role [cloud]
API Gateway
SSRF Vulnerability CVSS 9.3* · Critical
9.3
REST API :8080
Weak JWT Secret CVSS 7.5* · High
7.5
gRPC :50051
API to Auth
Auth Service
Session Store
Redis Cluster
Redis :6379
API to Payment
Payment Service
Secrets Access
Secrets Manager
IMDS Exposure CVSS 8.1* · High
8.1
DB Connection
API to Users
RDS Primary
PostgreSQL :5432
User Service
DB Connection
Log4Shell CVSS 10.0* · Critical
10.0
IDOR CVSS 6.5* · Medium
6.5
K8s API Access
K8s Admin [admin]
Container Escape
Cluster Escape [node]
Secrets Exfil
Secrets Read [cloud]
DB Credential Use
Database Access [data]
Host
Service
Privilege
Exploit
Critical vulnerability
High vulnerability
Medium vulnerability
Attack step
Network path
Runs on host
* CVSS computed from the vector