



# Car Rental Management System

INFO 6210


YASH VYAS

# Requirements

- ▶ Accurate inventory management
- ▶ Keep records of customers and their orders placed
- ▶ Access vendor details with ease
- ▶ Maintain logs of Repairs and service carried out on cars
- ▶ Maintain data of staff working at different location
- ▶ Collect correct data from database for generating invoice



# EER

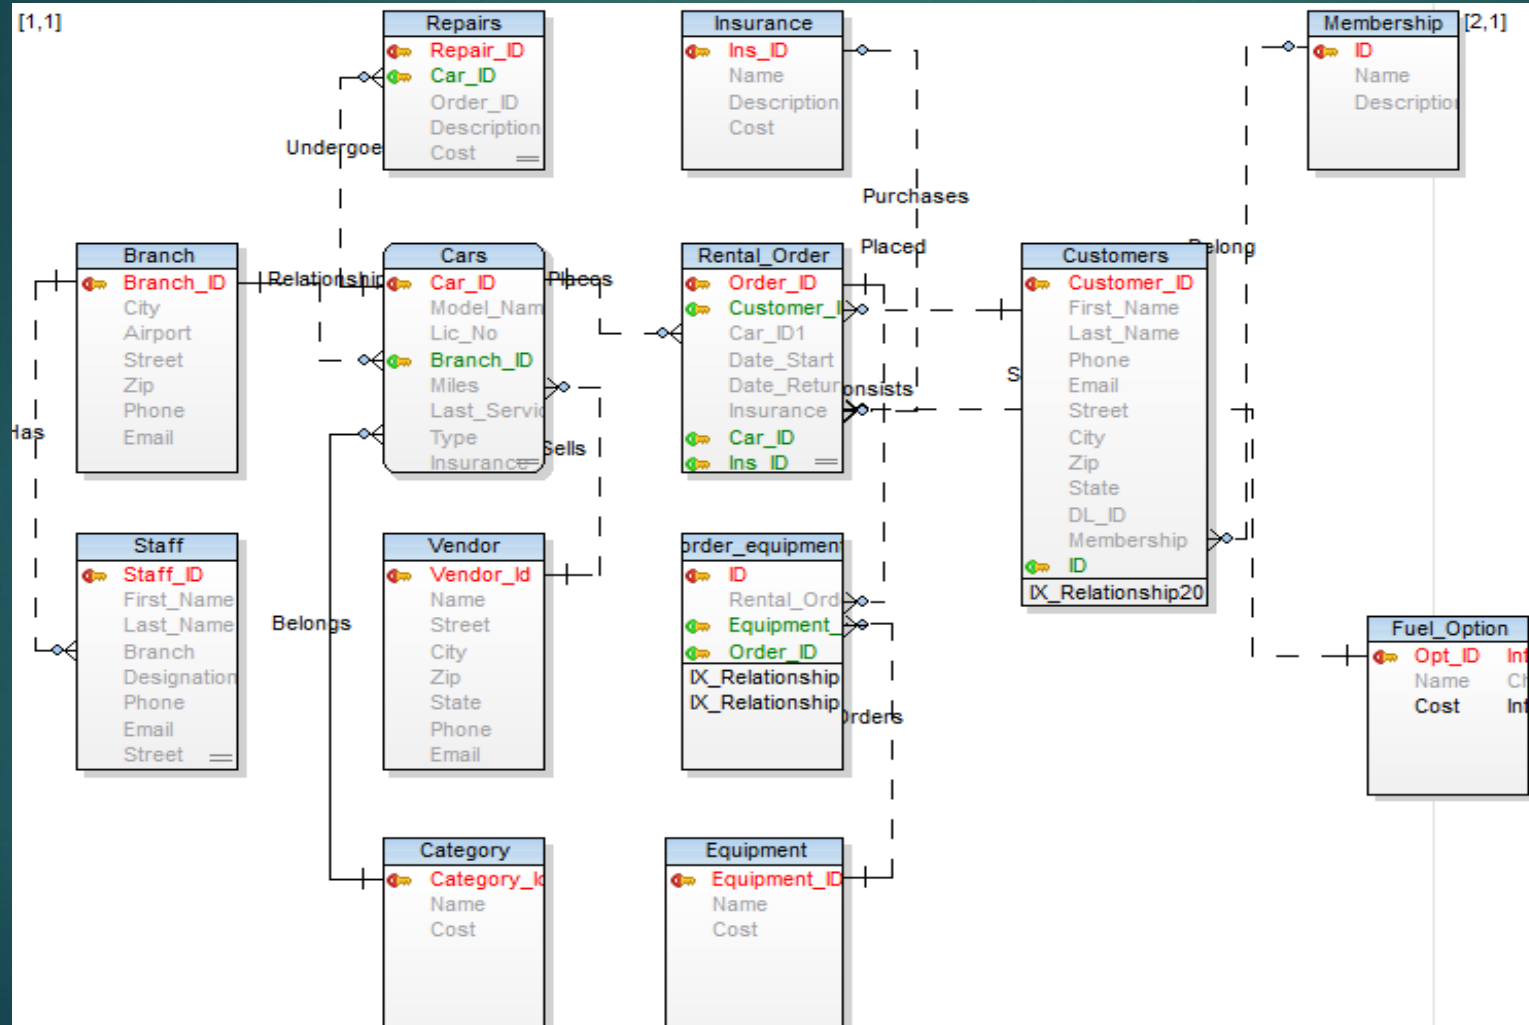

# Steps Followed

- ▶ Gather Business Requirements
- ▶ Draft EER
- ▶ Define Entities, Attributes, Relationships
- ▶ Select Data Type
- ▶ Forward Engineering
- ▶ Storing Data
- ▶ Adding Stored Procedures and Trigger for functionality



# Outcome

- ▶ RDBMS implemented satisfying customer requirements
- ▶ Inventory Management achieved
- ▶ Ordering Process made simple
- ▶ Invoice Generation made easy with the help of stored procedures

## STORED PROCEDURE

```
1 • CREATE DEFINER=`root`@`localhost` PROCEDURE `catavailable`(IN city INT)
2 BEGIN
3   select category.Name , count(cars.Car_ID) as Category_Available
4   FROM category LEFT JOIN cars
5   ON category.Category_Id = cars.Category_Id
6   where cars.Branch_ID = city AND available = 'Y'
7   GROUP BY 1;
8 END
```

Keeps track of cars for each category for each individual city

```
1 • CREATE DEFINER=`root`@`localhost` PROCEDURE `invoice`(IN orderid INT)
2 BEGIN
3   SELECT datediff(Date_Return,Date_Start) INTO @NOD FROM rental_order WHERE Car_ID = orderid;
4   SELECT order_id,((@NOD * category.cost)+(@NOD*insurance.cost)+(fuel_option.Cost)+(SELECT (count(
5   FROM rental_order
6   INNER JOIN category
7   ON rental_order.Category_Id = category.Category_Id
8   INNER JOIN insurance
9   ON rental_order.Ins_ID = insurance.Ins_ID
10  INNER JOIN fuel_option
11  ON rental_order.FuelOpt_ID = fuel_option.Opt_ID
12  WHERE Order_ID = orderid;
13 END
```

Helps generate invoice for when order id is inserted

```

-- MySQL dump 10.13 Distrib 5.7.12, for Win64 (x86_64)

--

-- Host: 127.0.0.1 Database: yash

-- -----

-- Server version      5.7.17-log


/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;


--

-- Table structure for table `branch`

--

DROP TABLE IF EXISTS `branch`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `branch` (
  `Branch_ID` int(11) NOT NULL,
  `City` char(50) DEFAULT NULL,
  `Airport` char(20) DEFAULT NULL,
  `Street` char(100) DEFAULT NULL,

```

```

`Zip` int(11) DEFAULT NULL,
`Phone` int(20) DEFAULT NULL,
`Email` char(50) DEFAULT NULL,
PRIMARY KEY (`Branch_ID`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `branch`
--

LOCK TABLES `branch` WRITE;
/*!40000 ALTER TABLE `branch` DISABLE KEYS */;
INSERT INTO `branch` VALUES (1,'Boston','LIA','15 Transportation
Way',2128,61712345,'boston.hertz@gmail.com'),(2,'New York','JFK','305 Federal
Court',11430,71812345,'ny.hertz@gmail.com'),(3,'Washinton','DIA','Dr. Sterling
Road',20166,21412345,'washington.hertz@gmail.com');
/*!40000 ALTER TABLE `branch` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `cars`
--

DROP TABLE IF EXISTS `cars`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `cars` (
  `Car_ID` int(11) NOT NULL,
  `Model_Name` char(20) DEFAULT NULL,

```



```

`Lic_No` char(20) DEFAULT NULL,
`Branch_ID` int(11) NOT NULL,
`Miles` int(11) DEFAULT NULL,
`Last_Service` date DEFAULT NULL,
`Insurance_No` int(11) DEFAULT NULL,
`Vendor_Id` int(11) NOT NULL,
`Category_Id` int(11) NOT NULL,
`Available` char(20) DEFAULT NULL,
PRIMARY KEY (`Car_ID`,`Category_Id`),
KEY `IX_Relationship1` (`Branch_ID`),
KEY `IX_Relationship8` (`Vendor_Id`),
KEY `Relationship16` (`Category_Id`),
CONSTRAINT `Relationship1` FOREIGN KEY (`Branch_ID`) REFERENCES `branch` (`Branch_ID`),
CONSTRAINT `Relationship16` FOREIGN KEY (`Category_Id`) REFERENCES `category` (`Category_Id`),
CONSTRAINT `Relationship8` FOREIGN KEY (`Vendor_Id`) REFERENCES `vendor` (`Vendor_Id`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `cars`
--

LOCK TABLES `cars` WRITE;

/*!40000 ALTER TABLE `cars` DISABLE KEYS */;

INSERT INTO `cars` VALUES (1,'City','MH345',1,456,'2016-03-04',456234,1,2,'Y'),(2,'City','MH212',1,457,'2016-02-14',124243,1,2,'Y'),(3,'Corolla','MH678',1,786,'2016-01-21',431134,1,2,'Y'),(4,'Jeep','DL456',1,834,'2016-02-03',234134,1,3,'Y'),(5,'C200','DL423',1,786,'2016-02-18',143345,2,4,'Y'),(6,'Spark','VT645',1,213,'2016-04-02',123132,1,1,'Y'),(7,'Focus','NY453',2,321,'2016-08-09',342123,3,2,'Y'),(8,'City','NY891',2,134,'2016-07-09',123421,3,2,'Y'),(9,'Pulse','NY342',2,389,'2016-09-09',453212,3,1,'Y'),(10,'Explorer','NY222',2,341,'2016-09-

```

```
02',123434,3,3,'Y'),(11,'3Series','NY783',2,234,'2016-09-03',134982,4,4,'Y'),(12,'Corolla','VA213',3,891,'2016-04-05',221311,5,2,'Y'),(13,'City','VA784',3,321,'2016-09-21',134455,5,2,'Y'),(14,'Jeep','VA312',3,456,'2016-09-07',123441,5,3,'Y'),(15,'LincolnX','VA442',3,341,'2016-09-02',134143,6,4,'Y');
```

```
/*!40000 ALTER TABLE `cars` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `category`
```

```
--
```

```
DROP TABLE IF EXISTS `category`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
/*!40101 SET character_set_client = utf8 */;
```

```
CREATE TABLE `category` (
```

```
  `Category_Id` int(11) NOT NULL,
```

```
  `Name` char(20) DEFAULT NULL,
```

```
  `Cost` int(11) DEFAULT NULL,
```

```
  PRIMARY KEY (`Category_Id`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `category`
```

```
--
```

```
LOCK TABLES `category` WRITE;
```

```
/*!40000 ALTER TABLE `category` DISABLE KEYS */;
```

```
INSERT INTO `category` VALUES (1,'Mid Size',20),(2,'Sedan',25),(3,'SUV',30),(4,'Luxury',50);
```

```
/*!40000 ALTER TABLE `category` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `customers`
```

```
--
```

```
DROP TABLE IF EXISTS `customers`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
/*!40101 SET character_set_client = utf8 */;
```

```
CREATE TABLE `customers` (
```

```
  `Customer_ID` int(11) NOT NULL,
```

```
  `First_Name` char(20) DEFAULT NULL,
```

```
  `Last_Name` char(20) DEFAULT NULL,
```

```
  `Phone` varchar(100) DEFAULT NULL,
```

```
  `Email` char(20) DEFAULT NULL,
```

```
  `Street` char(20) DEFAULT NULL,
```

```
  `City` char(20) DEFAULT NULL,
```

```
  `Zip` int(11) DEFAULT NULL,
```

```
  `State` char(20) DEFAULT NULL,
```

```
  `DL_ID` char(20) DEFAULT NULL,
```

```
  `Membership` int(11) DEFAULT NULL,
```

```
  PRIMARY KEY (`Customer_ID`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `customers`
```

```
--
```



```
LOCK TABLES `customers` WRITE;
```

```
/*!40000 ALTER TABLE `customers` DISABLE KEYS */;
```

```
INSERT INTO `customers` VALUES (1,'Yash','Vyas','9833395436','vyas.y@gmail.com','Boylston Street','Boston',2215,'MA','MA789',1),(2,'Vishal','Kotak','9819588245','k.vishal@gmail.com','Tremont Street','Boston',2234,'MA','MA432',1),(3,'Naveen','Pandia','9930919488','n.panda@gmail.com','Germain Street','Boston',2213,'MA','MA737',1),(4,'Arif','Jan','9819244385','j.arif@gmail.com','Stephain Streer','New York',10134,'NY','NY567',1),(5,'Asif','Jan','9320070294','j.asif@gmail.com','Stephain Street','New York',10134,'NY','NY989',1),(6,'Priyanka','Gupta','9833294345','p.gupta@gmail.com','Bank Street','New York',10923,'NY','NY342',2),(7,'Abhishek','Gupta','986786723','a.gupta','Bank Street','New York',12913,'NY','NY341',1),(8,'Manan','Shah','981923345','m.shah@gmail.com','Napean Road','Washington',34311,'VA','VA213',3),(9,'Maitri','Goradia','98322334','m.goradia@gmail.com','Lohar Chawl','Washinton',34541,'VA','VA583',1),(10,'Rohan','Solanki','8392291','r.solanki','Pedder Road','Washinton',13434,'VA','VA782',2);
```

```
/*!40000 ALTER TABLE `customers` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `equipment`
```

```
--
```

```
DROP TABLE IF EXISTS `equipment`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
/*!40101 SET character_set_client = utf8 */;
```

```
CREATE TABLE `equipment` (
```

```
  `Equipment_ID` int(11) NOT NULL,
```

```
  `Name` char(20) DEFAULT NULL,
```

```
  `Cost` int(11) DEFAULT NULL,
```

```
  PRIMARY KEY (`Equipment_ID`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `equipment`
```

```
--
```

```
LOCK TABLES `equipment` WRITE;
```

```
/*!40000 ALTER TABLE `equipment` DISABLE KEYS */;
```

```
INSERT INTO `equipment` VALUES (1,'Car Seat',10),(2,'Luggage Rack',10),(3,'GPS',10),(4,'DVD Player',10);
```

```
/*!40000 ALTER TABLE `equipment` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `fuel_option`
```

```
--
```

```
DROP TABLE IF EXISTS `fuel_option`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
/*!40101 SET character_set_client = utf8 */;
```

```
CREATE TABLE `fuel_option` (
```

```
  `Opt_ID` int(11) NOT NULL,
```

```
  `Name` char(20) DEFAULT NULL,
```

```
  `Cost` int(11) NOT NULL,
```

```
  PRIMARY KEY (`Opt_ID`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `fuel_option`
```

```
--
```

```
LOCK TABLES `fuel_option` WRITE;
```

```

/*!40000 ALTER TABLE `fuel_option` DISABLE KEYS */;
INSERT INTO `fuel_option` VALUES (1,'Full Tank',40),(2,'Return Full Tank',20),(3,'Quarter Tank',10);
/*!40000 ALTER TABLE `fuel_option` ENABLE KEYS */;
UNLOCK TABLES;

--
-- Table structure for table `insurance`
--

DROP TABLE IF EXISTS `insurance`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `insurance` (
  `Ins_ID` int(11) NOT NULL,
  `Name` char(20) DEFAULT NULL,
  `Description` char(100) DEFAULT NULL,
  `Cost` int(11) DEFAULT NULL,
  PRIMARY KEY (`Ins_ID`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `insurance`
--

LOCK TABLES `insurance` WRITE;
/*!40000 ALTER TABLE `insurance` DISABLE KEYS */;
INSERT INTO `insurance` VALUES (1,'Car','Covers all Damages to Car',10),(2,'Car+Passenger','Covers
Damages to car and passenger',40);

```



```

/*!40000 ALTER TABLE `insurance` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `membership`
--

DROP TABLE IF EXISTS `membership`;

/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `membership` (
  `ID` int(11) NOT NULL,
  `Name` char(20) DEFAULT NULL,
  `Description` char(20) DEFAULT NULL,
  PRIMARY KEY (`ID`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
/*!40101 SET character_set_client = @saved_cs_client */;

--

-- Dumping data for table `membership`
--

LOCK TABLES `membership` WRITE;

/*!40000 ALTER TABLE `membership` DISABLE KEYS */;
/*!40000 ALTER TABLE `membership` ENABLE KEYS */;

UNLOCK TABLES;

--

-- Table structure for table `order_equipment`

```

--

```
DROP TABLE IF EXISTS `order_equipment`;

/*!40101 SET @saved_cs_client  = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;

CREATE TABLE `order_equipment` (
  `ID` int(11) NOT NULL,
  `Rental_Order_ID` int(11) DEFAULT NULL,
  `Equipment_ID` int(11) NOT NULL,
  `Order_ID` int(11) NOT NULL,
  PRIMARY KEY (`ID`),
  KEY `IX_Relationship19` (`Order_ID`),
  KEY `IX_Relationship18` (`Equipment_ID`),
  CONSTRAINT `Relationship18` FOREIGN KEY (`Equipment_ID`) REFERENCES `equipment`
  (`Equipment_ID`),
  CONSTRAINT `Relationship19` FOREIGN KEY (`Order_ID`) REFERENCES `rental_order` (`Order_ID`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

/*!40101 SET character_set_client = @saved_cs_client */;
```

--

-- Dumping data for table `order\_equipment`

--

```
LOCK TABLES `order_equipment` WRITE;

/*!40000 ALTER TABLE `order_equipment` DISABLE KEYS */;

/*!40000 ALTER TABLE `order_equipment` ENABLE KEYS */;

UNLOCK TABLES;
```

--

-- Table structure for table `rental\_order`

--

DROP TABLE IF EXISTS `rental\_order`;

/\*!40101 SET @saved\_cs\_client = @@character\_set\_client \*/;

/\*!40101 SET character\_set\_client = utf8 \*/;

CREATE TABLE `rental\_order` (

    `Order\_ID` int(11) NOT NULL,

    `Customer\_ID` int(11) NOT NULL,

    `Date\_Start` date DEFAULT NULL,

    `Date\_Return` date DEFAULT NULL,

    `Car\_ID` int(11) NOT NULL,

    `Ins\_ID` int(11) DEFAULT NULL,

    `Category\_Id` int(11) NOT NULL,

    `FuelOpt\_ID` int(11) NOT NULL,

    PRIMARY KEY (`Order\_ID`),

    KEY `IX\_Relationship5` (`Ins\_ID`),

    KEY `IX\_Relationship7` (`Customer\_ID`),

    KEY `IX\_Relationship4` (`Car\_ID`, `Category\_Id`),

    KEY `IX\_Relationship21` (`FuelOpt\_ID`),

    CONSTRAINT `Relationship21` FOREIGN KEY (`FuelOpt\_ID`) REFERENCES `fuel\_option` (`Opt\_ID`),

    CONSTRAINT `Relationship4` FOREIGN KEY (`Car\_ID`, `Category\_Id`) REFERENCES `cars` (`Car\_ID`, `Category\_Id`),

    CONSTRAINT `Relationship5` FOREIGN KEY (`Ins\_ID`) REFERENCES `insurance` (`Ins\_ID`),

    CONSTRAINT `Relationship7` FOREIGN KEY (`Customer\_ID`) REFERENCES `customers` (`Customer\_ID`)

) ENGINE=InnoDB DEFAULT CHARSET=utf8;

/\*!40101 SET character\_set\_client = @saved\_cs\_client \*/;

--



```
-- Dumping data for table `rental_order`
```

```
--
```

```
LOCK TABLES `rental_order` WRITE;
```

```
/*!40000 ALTER TABLE `rental_order` DISABLE KEYS */;
```

```
/*!40000 ALTER TABLE `rental_order` ENABLE KEYS */;
```

```
UNLOCK TABLES;
```

```
--
```

```
-- Table structure for table `repairs`
```

```
--
```

```
DROP TABLE IF EXISTS `repairs`;
```

```
/*!40101 SET @saved_cs_client = @@character_set_client */;
```

```
/*!40101 SET character_set_client = utf8 */;
```

```
CREATE TABLE `repairs` (
```

```
  `Repair_ID` int(11) NOT NULL,
```

```
  `Car_ID` int(11) NOT NULL,
```

```
  `Order_ID` int(11) DEFAULT NULL,
```

```
  `Description` char(20) DEFAULT NULL,
```

```
  `Cost` char(20) DEFAULT NULL,
```

```
  PRIMARY KEY (`Repair_ID`),
```

```
  KEY `IX_Relationship17` (`Car_ID`),
```

```
  CONSTRAINT `Relationship17` FOREIGN KEY (`Car_ID`) REFERENCES `cars` (`Car_ID`)
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
/*!40101 SET character_set_client = @saved_cs_client */;
```

```
--
```

```
-- Dumping data for table `repairs`
```

--

LOCK TABLES `repairs` WRITE;

/\*!40000 ALTER TABLE `repairs` DISABLE KEYS \*/;

INSERT INTO `repairs` VALUES

(1,2,NULL,'Suspension','213'),(2,5,NULL,'Paint','100'),(3,10,NULL,'Axle','400');

/\*!40000 ALTER TABLE `repairs` ENABLE KEYS \*/;

UNLOCK TABLES;

--

-- Table structure for table `staff`

--

DROP TABLE IF EXISTS `staff`;

/\*!40101 SET @saved\_cs\_client = @@character\_set\_client \*/;

/\*!40101 SET character\_set\_client = utf8 \*/;

CREATE TABLE `staff` (

`Staff\_ID` int(11) NOT NULL,

`First\_Name` varchar(100) DEFAULT NULL,

`Last\_Name` varchar(100) DEFAULT NULL,

`Designation` varchar(100) DEFAULT NULL,

`Phone` varchar(100) DEFAULT NULL,

`Email` char(200) DEFAULT NULL,

`Street` char(200) DEFAULT NULL,

`City` char(20) DEFAULT NULL,

`Zip` int(11) DEFAULT NULL,

`SSN` int(110) DEFAULT NULL,

`Branch\_ID` int(11) NOT NULL,

PRIMARY KEY (`Staff\_ID`),

```

KEY `IX_Relationship2` (`Branch_ID`),
CONSTRAINT `Relationship2` FOREIGN KEY (`Branch_ID`) REFERENCES `branch` (`Branch_ID`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `staff`
--

LOCK TABLES `staff` WRITE;

/*!40000 ALTER TABLE `staff` DISABLE KEYS */;

INSERT INTO `staff` VALUES (1,'John','Steward','Manager','9145057099','j.steward@hertz.com','1163
Boylston Street','Boston',2215,12345678,1),(2,'Marie','Fox','Receptionist','9145057100','f.marie','1171
boylston
Street','Boston',2215,1234545,1),(3,'Stewie','Little','Mechanic','9145057010','s.little@hertz.com','1173
Boylston
Street','Boston',2215,12354637,1),(4,'Liza','Parker','Manager','9174247232','l.parker@hertz.com','25
bank Street','New
York',2115,12378989,2),(5,'Bob','Koch','Receptionist','9174236767','k.bob@hertz.com','25
Riverdrive','New
York',10717,132648787,2),(6,'Steve','Parker','Mechanic','9172347812','s.parker@hertz.com','17th &
33rd Street','New
York',12345,123465359,2),(7,'Laura','Fink','Manager','8512346681','l.fink@hertz.com','21 Downtown
Loop','washington',34213,342412341,3),(8,'Mike','Luck','receptionist','8142113421','m.luck@hertz.com',
'33 Napeolen
Street','Washinton',23123,234241324,3),(9,'Rick','Long','Mechanic','8134213411','r.long@hertz.com','22
Downing Street','Washongton',23145,123453219,3);

/*!40000 ALTER TABLE `staff` ENABLE KEYS */;

UNLOCK TABLES;

--
-- Table structure for table `vendor`
--

```



```

DROP TABLE IF EXISTS `vendor`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

/*!40101 SET character_set_client = utf8 */;

CREATE TABLE `vendor` (
  `Vendor_Id` int(11) NOT NULL,
  `Name` char(100) DEFAULT NULL,
  `Street` char(100) DEFAULT NULL,
  `City` char(40) DEFAULT NULL,
  `Zip` int(11) DEFAULT NULL,
  `State` char(20) DEFAULT NULL,
  `Phone` int(21) DEFAULT NULL,
  `Email` char(40) DEFAULT NULL,
  PRIMARY KEY (`Vendor_Id`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

/*!40101 SET character_set_client = @saved_cs_client */;

--
-- Dumping data for table `vendor`
--

LOCK TABLES `vendor` WRITE;

/*!40000 ALTER TABLE `vendor` DISABLE KEYS */;

INSERT INTO `vendor` VALUES (1,'FreeWay Motors','Colling
Street','Boston',2115,'MA',234567,'freeway@gmail.com'),(2,'Hunt Mercedes','huntington
Avenue','Boston',2245,'MA',12451341,'huntmerz@gmail.com'),(3,'Sunny Motors','10 Wall Street','New
York',10765,'NY',13412532,'sunnyway@gmail.com'),(4,'City Luxury','23 Brooklyn Waters','New
York',12876,'NY',98767845,'vitylux@gmail.com'),(5,'Washington Motors','32 Lincoln
Street','Washinton',34123,'VA',912341234,'washmotors@gmail.com'),(6,'Deluxe Motors','2A Hill
View','Washginton',54674,'VA',912712364,'deulxemv@gmail.com');

/*!40000 ALTER TABLE `vendor` ENABLE KEYS */;

UNLOCK TABLES;

```

```
/*!40103 SET TIME_ZONE=@OLD_TIME_ZONE */;
```

```
/*!40101 SET SQL_MODE=@OLD_SQL_MODE */;
```

```
/*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */;
```

```
/*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */;
```

```
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
```

```
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
```

```
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

```
/*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */;
```

```
-- Dump completed on 2017-04-20 14:22:20
```