

## Ex1

```
Lab09_101488823 > exercise-1 > student-app > src > app > students.component.ts > ...
1  import { Component } from '@angular/core';
2
3  @Component({
4    selector: 'students',
5    standalone: false,
6    template: `
7      <h1>{{ getTitle() }} - {{ getCurrentDate() }}</h1>
8    `
9  })
10 export class StudentsComponent {
11   title = 'Top 5 Students';
12
13   getTitle() {
14     return this.title;
15   }
16
17   getCurrentDate() {
18     return new Date().toLocaleDateString();
19   }
20 }
21
```

```
Lab09_101488823 > exercise-1 > student-app > src > app > app-module.ts > ...
1  import { NgModule, provideBrowserGlobalErrorListeners } from '@angular/core';
2  import { BrowserModule } from '@angular/platform-browser';
3
4  import { App } from './app';
5  import { StudentsComponent } from './students.component';
6  import { Student } from './student/student';
7
8  @NgModule({
9    declarations: [App, StudentsComponent, Student],
10    imports: [BrowserModule],
11    providers: [provideBrowserGlobalErrorListeners()],
12    bootstrap: [App],
13  })
14  export class AppModule {}
15
```



```
Lab09_101488823 > exercise-1 > student-app > src > app > app.html > h1
1  <h1>My Student App</h1>
2  <students></students>
3
```



# My Student App

## Top 5 Students - 4/5/2026

Ex2

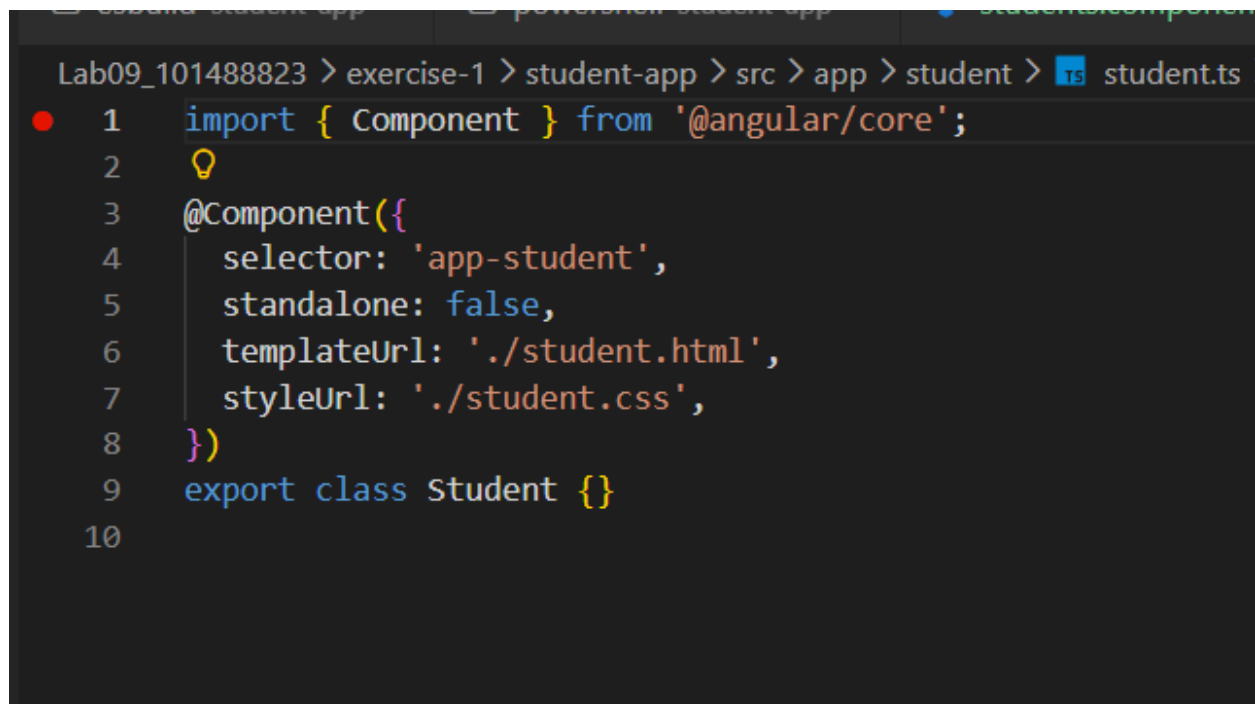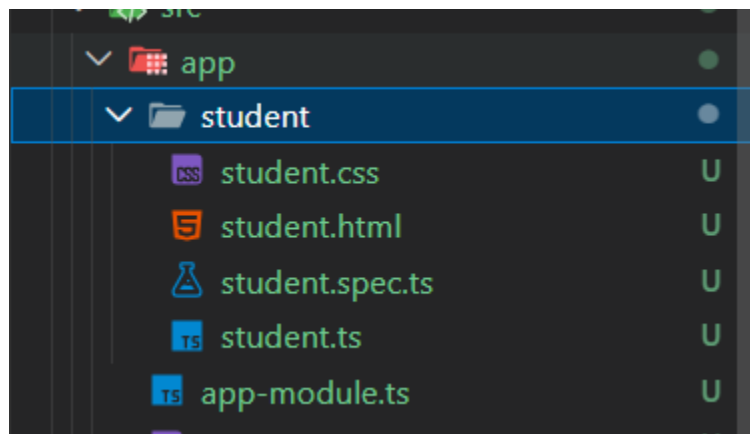

### Ex3

Lab09\_101488823 > exercise-1 > student-app > src > app > students.component.ts > ...

```
1  import { Component } from '@angular/core';
2
3  @Component({
4    selector: 'students',
5    standalone: false,
6    template: `
7      <h1>{{ getTitle() }} - {{ getCurrentDate() }}</h1>
8    `
9  })
10 export class StudentsComponent {
11   title = 'Top 5 Students';
12
13   getTitle() {
14     return this.title;
15   }
16
17   getCurrentDate() {
18     return new Date().toLocaleDateString();
19   }
20 }
21
```

```
3   getTitle() {
4     return this.title;
5   }
6
7   getCurrentDate() {
8     return new Date().toLocaleDateString();
9   }
10 }
```

