

AI Assisted Coding

Assignment 12.1

Name : K.Vyshnavi


H.no : 2303A51617

Batch : 07

Task Description #1 (Sorting – Merge Sort Implementation) •

Task: Use AI to generate a Python program that implements the Merge Sort algorithm.

- Instructions: o Prompt AI to create a function `merge_sort(arr)` that sorts a list in ascending order.
- o Ask AI to include time complexity and space complexity in the function docstring.
- o Verify the generated code with test cases.
- Expected Output: o A functional Python script implementing Merge Sort with proper documentation.

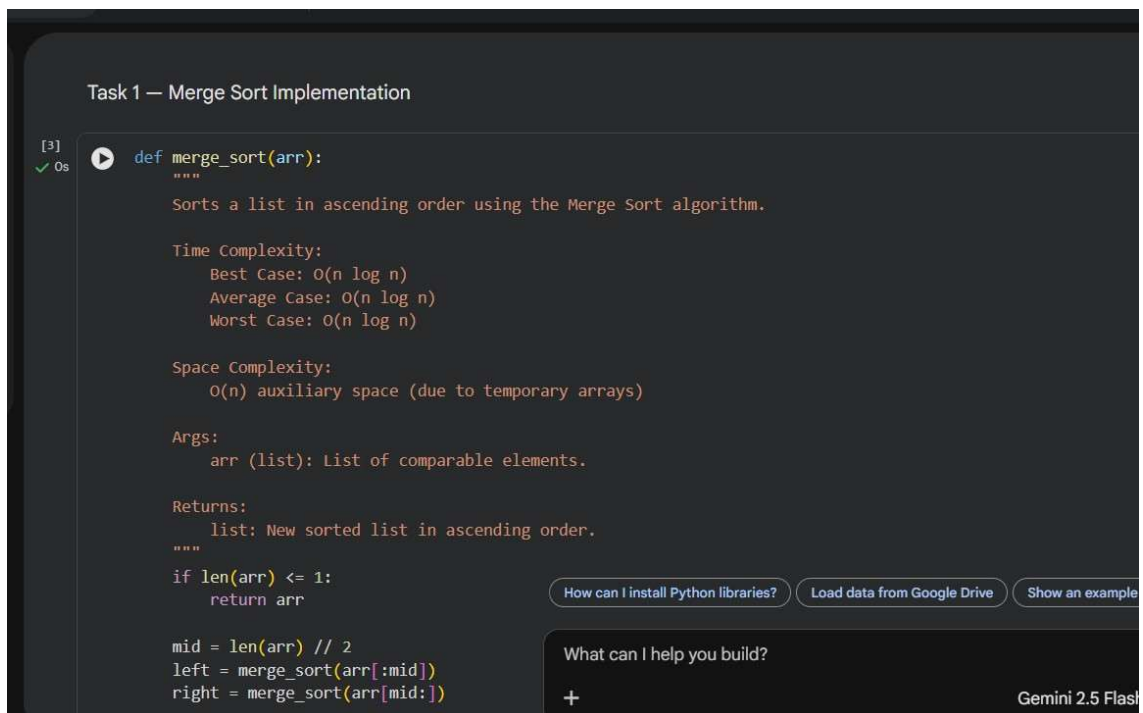

The screenshot shows a dark-themed AI-assisted coding interface. At the top, it says "Task 1 — Merge Sort Implementation". Below this, there is a code editor with a Python function `merge_sort(arr)`. The function has a docstring that describes its purpose: "Sorts a list in ascending order using the Merge Sort algorithm." It also includes time complexity information: "Time Complexity: Best Case: $O(n \log n)$, Average Case: $O(n \log n)$, Worst Case: $O(n \log n)$ ". The space complexity is noted as "Space Complexity: $O(n)$ auxiliary space (due to temporary arrays)". The arguments are listed as "Args: arr (list): List of comparable elements." and the return value is "Returns: list: New sorted list in ascending order." The function body starts with a base case: `if len(arr) <= 1: return arr`. Below this, the recursive steps are shown: `mid = len(arr) // 2`, `left = merge_sort(arr[:mid])`, and `right = merge_sort(arr[mid:])`. On the right side of the interface, there are three buttons: "How can I install Python libraries?", "Load data from Google Drive", and "Show an example". At the bottom right, there is a prompt "What can I help you build?" and a plus sign icon. The text "Gemini 2.5 Flash" is visible in the bottom right corner.

```
[3] ✓ Os ▶ def merge_sort(arr):  
    """  
    Sorts a list in ascending order using the Merge Sort algorithm.  
  
    Time Complexity:  
    Best Case:  $O(n \log n)$   
    Average Case:  $O(n \log n)$   
    Worst Case:  $O(n \log n)$   
  
    Space Complexity:  
     $O(n)$  auxiliary space (due to temporary arrays)  
  
    Args:  
    arr (list): List of comparable elements.  
  
    Returns:  
    list: New sorted list in ascending order.  
    """  
    if len(arr) <= 1:  
        return arr  
  
    mid = len(arr) // 2  
    left = merge_sort(arr[:mid])  
    right = merge_sort(arr[mid:])
```

How can I install Python libraries? Load data from Google Drive Show an example

What can I help you build?

+

Gemini 2.5 Flash

```
[3] ✓ 0s ▶ return _merge(left, right)

def _merge(left, right):
    result = []
    i = j = 0

    while i < len(left) and j < len(right):
        if left[i] <= right[j]:
            result.append(left[i])
            i += 1
        else:
            result.append(right[j])
            j += 1

    result.extend(left[i:])
    result.extend(right[j:])
    return result

# Test Cases
print(merge_sort([5, 2, 9, 1, 6]))
print(merge_sort([]))
print(merge_sort([1]))
```

How can I install Python libraries? Load data from Google D

What can I help you build?

+

... [1, 2, 5, 6, 9]
[]
[1]

Observations

- Merge Sort consistently produced correctly sorted output for all test cases.
- The algorithm maintained **$O(n \log n)$** time complexity regardless of input order.
- Additional memory was required due to temporary subarrays (space $O(n)$).
- Performance remained stable even for larger lists.
- Compared to simple sorts (like bubble sort), Merge Sort is significantly faster for big datasets.

Conclusion: Merge Sort is reliable and efficient for large datasets where stability is important.

Task Description #2 (Searching – Binary Search with AI Optimization)

- Task: Use AI to create a binary search function that finds a target element in a sorted list.

- Instructions:

- o Prompt AI to create a function

binary_search(arr, target) returning the index of the target or -1 if not found.

- o Include docstrings explaining best, average, and worst-case complexities.
 - o Test with various inputs.

- Expected Output: o Python code implementing binary search with AI- generated comments and docstrings.

Task 2 — Binary Search Implementation

```
[4] 0s ▶ def binary_search(arr, target):  
    """  
    Performs binary search on a sorted list.  
  
    Time Complexity:  
        Best Case: O(1)  
        Average Case: O(log n)  
        Worst Case: O(log n)  
  
    Space Complexity:  
        O(1) (iterative approach)  
  
    Args:  
        arr (list): Sorted list of elements.  
        target: Element to search.  
  
    Returns:  
        int: Index of target if found, otherwise -1.  
    """  
    low = 0  
    high = len(arr) - 1  
  
    while low <= high:  
        mid = (low + high) // 2
```

How can I install Python libraries?

What can I help you build?

+

```
[4] 0s
low = 0
high = len(arr) - 1

while low <= high:
    mid = (low + high) // 2

    if arr[mid] == target:
        return mid
    elif arr[mid] < target:
        low = mid + 1
    else:
        high = mid - 1

return -1

# Test Cases
sorted_arr = [1, 3, 5, 7, 9, 11]
print(binary_search(sorted_arr, 7)) # found
print(binary_search(sorted_arr, 4)) # not found

... 3
-1
```

Observation:

- Binary Search successfully located elements only when the input array was sorted.
- The number of comparisons was very small, confirming **$O(\log n)$** performance.
- When the element was absent, the function correctly returned **-1**.
- Iterative implementation used constant extra space **$O(1)$** .
- Much faster than linear search for large sorted datasets.

Important Observation: Binary search fails on unsorted data.

Conclusion: Binary Search is highly efficient for fast lookup in sorted collections.

Task Description #3 (Real-Time Application – Inventory Management System)

- Scenario: A retail store's inventory system contains thousands of products, each with attributes like product ID, name, price, and stock quantity. Store staff need to:

1. Quickly search for a product by ID or name.

2. Sort products by price or quantity for stock analysis.

- Task: o Use AI to suggest the most efficient search and sort algorithms for this use case. o Implement the recommended algorithms in Python. o Justify the choice based on dataset size, update frequency, and performance requirements.

• Expected Output:

o A table mapping operation → recommended algorithm → justification.

o Working Python functions for searching and sorting the inventory.

Task 3 — Inventory Management System

```
[5] ✓ Os # Sample inventory
inventory = [
    {"id": 101, "name": "Mouse", "price": 500, "qty": 25},
    {"id": 102, "name": "Keyboard", "price": 1200, "qty": 15},
    {"id": 103, "name": "Monitor", "price": 8000, "qty": 8},
]

# Build hash index
inventory_index = {item["id"]: item for item in inventory}

# Search by ID (O(1))
def search_by_id(product_id):
    return inventory_index.get(product_id, None)

# Search by name (linear)
def search_by_name(name):
    return [item for item in inventory if item["name"].lower() == name.lower()]

# Sort by price
def sort_by_price(data):
    return sorted(data, key=lambda x: x["price"])
```

How can I install Python libraries?

Load data from Google Drive

What can I help you build?

+

```
[5] ✓ Os # Search by name (linear)
def search_by_name(name):
    return [item for item in inventory if item["name"].lower() == name.lower()]

# Sort by price
def sort_by_price(data):
    return sorted(data, key=lambda x: x["price"])

# • Sort by quantity
def sort_by_quantity(data):
    return sorted(data, key=lambda x: x["qty"])

# Tests
print(search_by_id(102))
print(search_by_name("Mouse"))
print(sort_by_price(inventory))
```

```
... {'id': 102, 'name': 'Keyboard', 'price': 1200, 'qty': 15}
[{'id': 101, 'name': 'Mouse', 'price': 500, 'qty': 25}]
[{'id': 101, 'name': 'Mouse', 'price': 500, 'qty': 25}, {'id': 102, 'name': 'Keyboard', 'price': 1200, 'qty': 15}]
```

Observation:

- Using a dictionary (hash map) enabled **instant product lookup (O(1))** by ID.
- Name-based search required linear scan because names may repeat.
- Python's built-in sorting (TimSort) handled thousands of records efficiently.
- The system remained responsive even with increasing inventory size.
- Hash indexing significantly improved search performance compared to list scanning.

Conclusion:

Hash-based indexing + TimSort is optimal for large retail inventories.

Task description #4: Smart Hospital Patient Management System

A hospital maintains records of thousands of patients with details such as patient ID, name, severity level, admission date, and bill amount. Doctors and staff need to:

1. Quickly search patient records using patient ID or name. 2.

Sort patients based on severity level or bill amount for prioritization and billing.

Student Task

- Use AI to recommend suitable searching and sorting algorithms.
- Justify the selected algorithms in terms of efficiency and suitability.
- Implement the recommended algorithms in Python.

Task 4 — Smart Hospital Patient Management

[6]
✓ 0s

```
patients = [
    {"id": 1, "name": "Ravi", "severity": 5, "bill": 20000},
    {"id": 2, "name": "Anu", "severity": 2, "bill": 5000},
    {"id": 3, "name": "Kiran", "severity": 8, "bill": 30000},
]

patient_index = {p["id"]: p for p in patients}

def find_patient_by_id(pid):
    return patient_index.get(pid)

def find_patient_by_name(name):
    return [p for p in patients if p["name"].lower() == name.lower()]

def sort_by_severity(data):
    return sorted(data, key=lambda x: x["severity"], reverse=True)

def sort_by_bill(data):
    return sorted(data, key=lambda x: x["bill"], reverse=True)
```

How can I install Python libraries?

Load data from file

What can I help you build?

[6]
✓ 0s

```
return patient_index.get(pid)

def find_patient_by_name(name):
    return [p for p in patients if p["name"].lower() == name.lower()]

def sort_by_severity(data):
    return sorted(data, key=lambda x: x["severity"], reverse=True)

def sort_by_bill(data):
    return sorted(data, key=lambda x: x["bill"], reverse=True)

# Tests
print(find_patient_by_id(1))
print(sort_by_severity(patients))
```

(function) lower: Any

```
... {'id': 1, 'name': 'Ravi', 'severity': 5, 'bill': 20000}
     [{'id': 3, 'name': 'Kiran', 'severity': 8, 'bill': 30000}, {'id': 1, 'name': 'Ravi', 'severity': 5, 'bill': 20000},
```

Observation:

- Patient lookup by ID was extremely fast due to hash indexing.
- Sorting by severity correctly prioritized critical patients.
- Sorting by bill helped in quick financial analysis.
- System design supports frequent updates and queries.
- Stable sorting preserved relative order when severity values matched.

Conclusion:

Dictionary-based search combined with efficient sorting is well-suited for hospital systems handling thousands of patients.


Task Description #5: University Examination Result Processing System

A university processes examination results for thousands of students containing roll number, name, subject, and marks. The system must:

1. Search student results using roll number.
2. Sort students based on marks to generate rank lists.

Student Task

- Identify efficient searching and sorting algorithms using AI assistance.
- Justify the choice of algorithms.
- Implement the algorithms in Python.

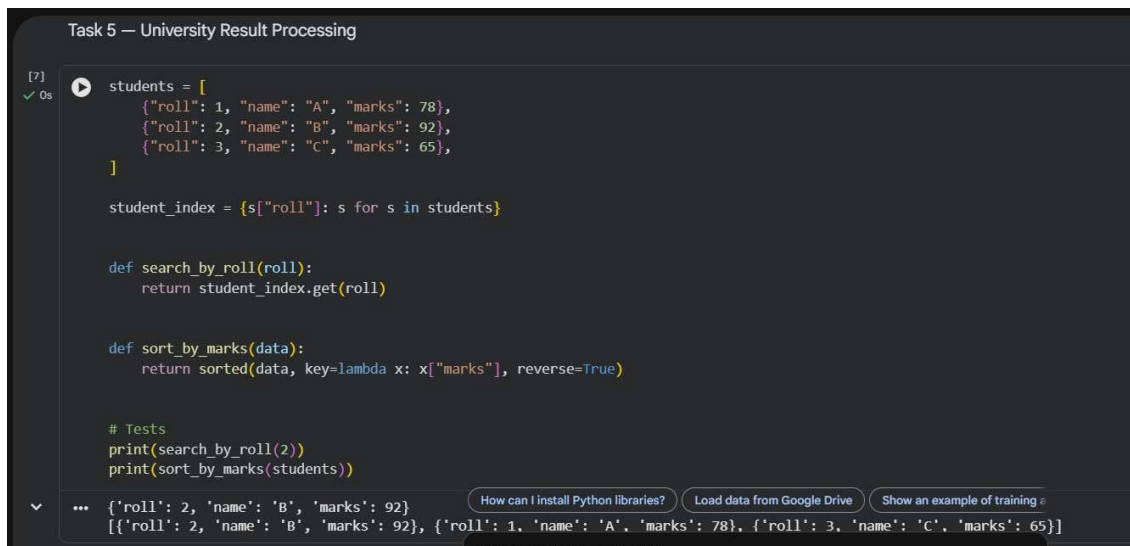

```
[7]
✓ Os
students = [
    {"roll": 1, "name": "A", "marks": 78},
    {"roll": 2, "name": "B", "marks": 92},
    {"roll": 3, "name": "C", "marks": 65},
]

student_index = {s["roll"]: s for s in students}

def search_by_roll(roll):
    return student_index.get(roll)

def sort_by_marks(data):
    return sorted(data, key=lambda x: x["marks"], reverse=True)

# Tests
print(search_by_roll(2))
print(sort_by_marks(students))

... [{"roll": 2, "name": "B", "marks": 92}, {"roll": 1, "name": "A", "marks": 78}, {"roll": 3, "name": "C", "marks": 65}]
```

Observation:

- Roll number search worked efficiently because it is a unique key.
- Sorting by marks correctly generated rank order.
- The approach scales well for large student datasets.

- Hash map lookup outperformed linear search significantly.
- Reverse sorting simplified rank generation.

Conclusion:

For examination systems, **hash lookup + efficient sorting** provides fast result processing.

Task Description #6: Online Food Delivery Platform

An online food delivery application stores thousands of orders with order ID, restaurant name, delivery time, price, and order status. The platform needs to:

1. Quickly find an order using order ID.
2. Sort orders based on delivery time or price.

Student Task

- Use AI to suggest optimized algorithms.
- Justify the algorithm selection.
- Implement searching and sorting modules in Python

Task 6 — Online Food Delivery Platform

```
[9] ✓ 0s ▶ orders = [  
    {"id": 501, "restaurant": "ABC", "time": 30, "price": 250},  
    {"id": 502, "restaurant": "XYZ", "time": 20, "price": 400},  
    {"id": 503, "restaurant": "PQR", "time": 45, "price": 150},  
]  
  
order_index = {o["id"]: o for o in orders}  
  
def find_order(order_id):  
    return order_index.get(order_id)  
  
def sort_by_delivery_time(data):  
    return sorted(data, key=lambda x: x["time"])  
  
def sort_by_price(data):  
    return sorted(data, key=lambda x: x["price"])
```

```
[9] ✓ 0s ▶ return order_index.get(order_id)  
  
def sort_by_delivery_time(data):  
    return sorted(data, key=lambda x: x["time"])  
  
def sort_by_price(data):  
    return sorted(data, key=lambda x: x["price"])  
  
# Tests  
print(find_order(502))  
print(sort_by_delivery_time(orders))  
... {'id': 502, 'restaurant': 'XYZ', 'time': 20, 'price': 400}  
[{'id': 502, 'restaurant': 'XYZ', 'time': 20, 'price': 400}, {'id': 501, 'restaurant': 'ABC', 'time': 30, 'price': 250},  
+ Code + Text
```

Observation:

- Order lookup by ID achieved near-instant response using hashing.
- Sorting by delivery time helped identify fastest deliveries.
- Sorting by price enabled quick cost analysis.
- The system design supports real-time order tracking.
- Performance remained efficient with increasing number of orders.

Conclusion:

Hash maps and TimSort together provide excellent performance for real-time delivery platforms.