


SAP CPI Project - Groovy Data Enricher

Objective

Retrieve user data from JSONPlaceholder, enrich each user by extracting the email domain with Groovy, log input/output payloads, and return the enriched JSON.

Integration Flow

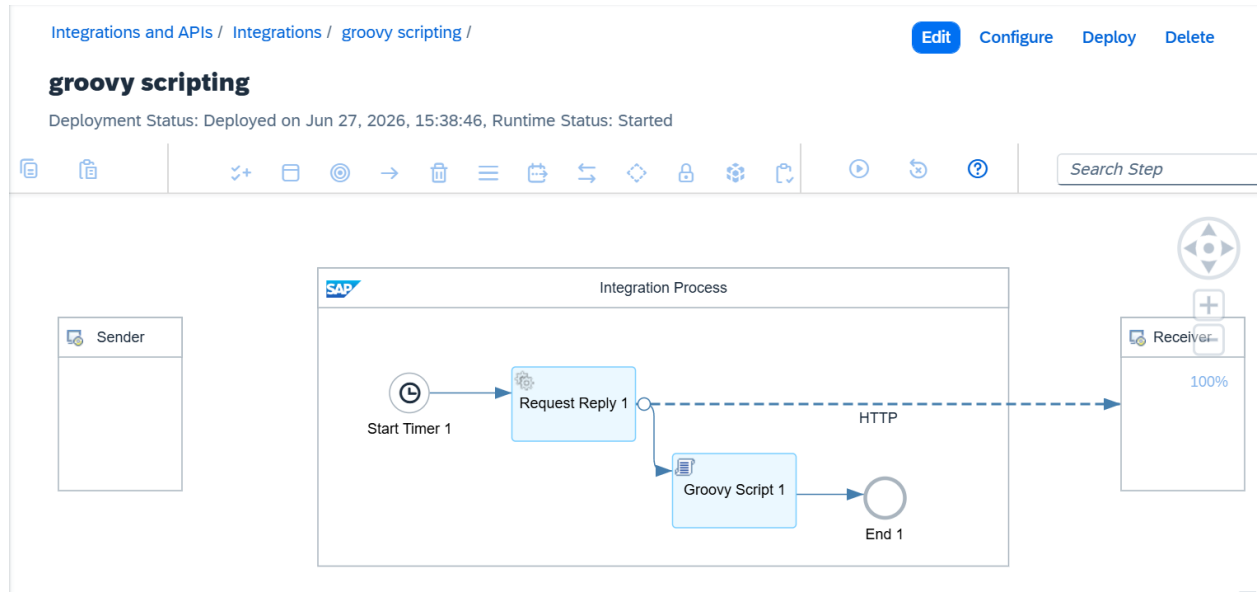

Successful Execution

groovy scripting

Last Updated at: Jun 27, 2026, 15:38:48

Status Properties Logs +2 v

Status

✓ Message processing completed successfully.

Processing Time: 457 ms

Example Input

```
{
  "id":1,
  "name":"Leanne Graham",
  "email":"Sincere@april.biz"
}
```

Example Output

```
{
  "id":1,
  "name":"Leanne Graham",
  "email":"Sincere@april.biz",
  "emailDomain":"april.biz"
}
```

Workflow

- Read JSON payload
- Log input
- Parse using JsonSlurper
- Loop through users
- Extract email domain
- Add emailDomain field
- Convert back to JSON
- Log output and return

Groovy Script

```
import com.sap.gateway.ip.core.customdev.util.Message
import groovy.json.JsonSlurper
import groovy.json.JsonOutput

def Message processData(Message message) {

    def log = messageLogFactory.getMessageLog(message)

    try {
        def body = message.getBody(String)
        log?.addAttachmentAsString("Input", body, "application/json")

        def json = new JsonSlurper().parseText(body)

        json.each { user ->
            def email = user.email
            def domain = email.split("@")[1]
            user.emailDomain = domain
        }

        def result = JsonOutput.toJson(json)
        message.setBody(result)

        log?.addAttachmentAsString("Output", result, "application/json")

    } catch (Exception e) {
```

```
        log?.addAttachmentAsString("Error", e.getMessage(), "text/plain")
        throw e
    }

    return message
}
```