



AL-WAFAA
FOR TRADING
EGYPTIAN CEMENT EXPORT

CEMENT CLINKER

HIGH QUALITY. CONSISTENT PERFORMANCE.

Al-Wafaa Cement Clinker is produced in Egypt using advanced kilns and strict quality control systems to ensure consistent quality and high reactivity. Our clinker is suitable for all types of cement manufacturing and meets international standards.



CONSISTENT
QUALITY



HIGH
REACTIVITY



ADVANCED
PRODUCTION



INTERNATIONAL
STANDARDS



SUSTAINABLE
MANUFACTURING



APPLICATIONS



CEMENT
MANUFACTURING



READY MIX
CONCRETE



PRECAST
PRODUCTION



INFRASTRUCTURE
PROJECTS



ROADS &
PAVEMENTS



MARINE
CONSTRUCTION


CHEMICAL COMPOSITION (%)

Component	Typical Range	Guaranteed Max.
CaO	62.0 – 66.0	66.5
SiO ₂	20.0 – 23.0	23.5
Al ₂ O ₃	4.0 – 7.0	7.5
Fe ₂ O ₃	2.0 – 4.0	4.5
MgO	0.5 – 2.5	2.8
SO ₃	0.3 – 1.0	1.2
Na ₂ Oeq	≤ 0.80	0.90
Loss on Ignition	≤ 1.0	1.5
Insoluble Residue	≤ 1.5	2.0
Free CaO	≤ 1.5	2.0

PHYSICAL PROPERTIES

Property	Typical Value	Test Method
Lime Saturation Factor (LSF)	0.92 – 0.98	EN 197-1
Silica Modulus (SM)	2.0 – 2.6	EN 197-1
Alumina Modulus (AM)	1.3 – 1.8	EN 197-1
Clinker Nodularity	≥ 70 %	Internal Method
Specific Gravity	3.10 – 3.20	EN 196-6
45 µm Sieve Residue	≤ 10 %	EN 933-1
Compressive Strength (Clinker Test, 28 Days)	≥ 45 MPa	EN 196-1
Soundness (Autoclave)	≤ 0.80 %	EN 196-3

TYPICAL COMPOUND COMPOSITION (%)

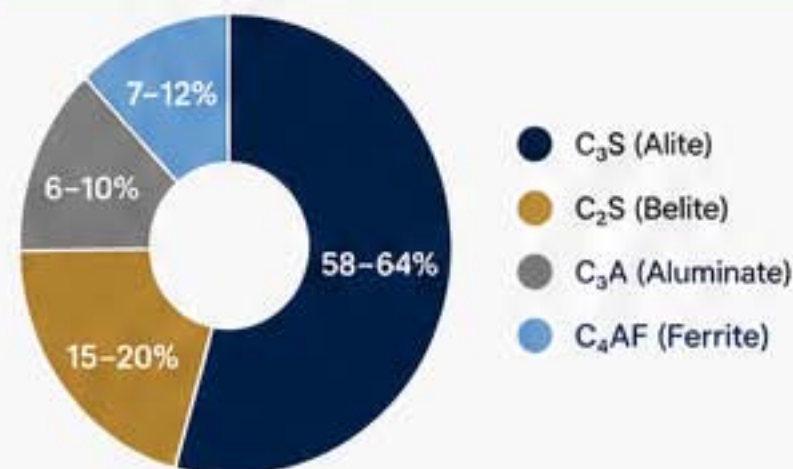

Balanced compound composition delivers strong early and long-term cement performance.