


Middleware Ramery — Schéma de la base de données (14 tables)
Flèches : relation de clé étrangère (table → table référencée)

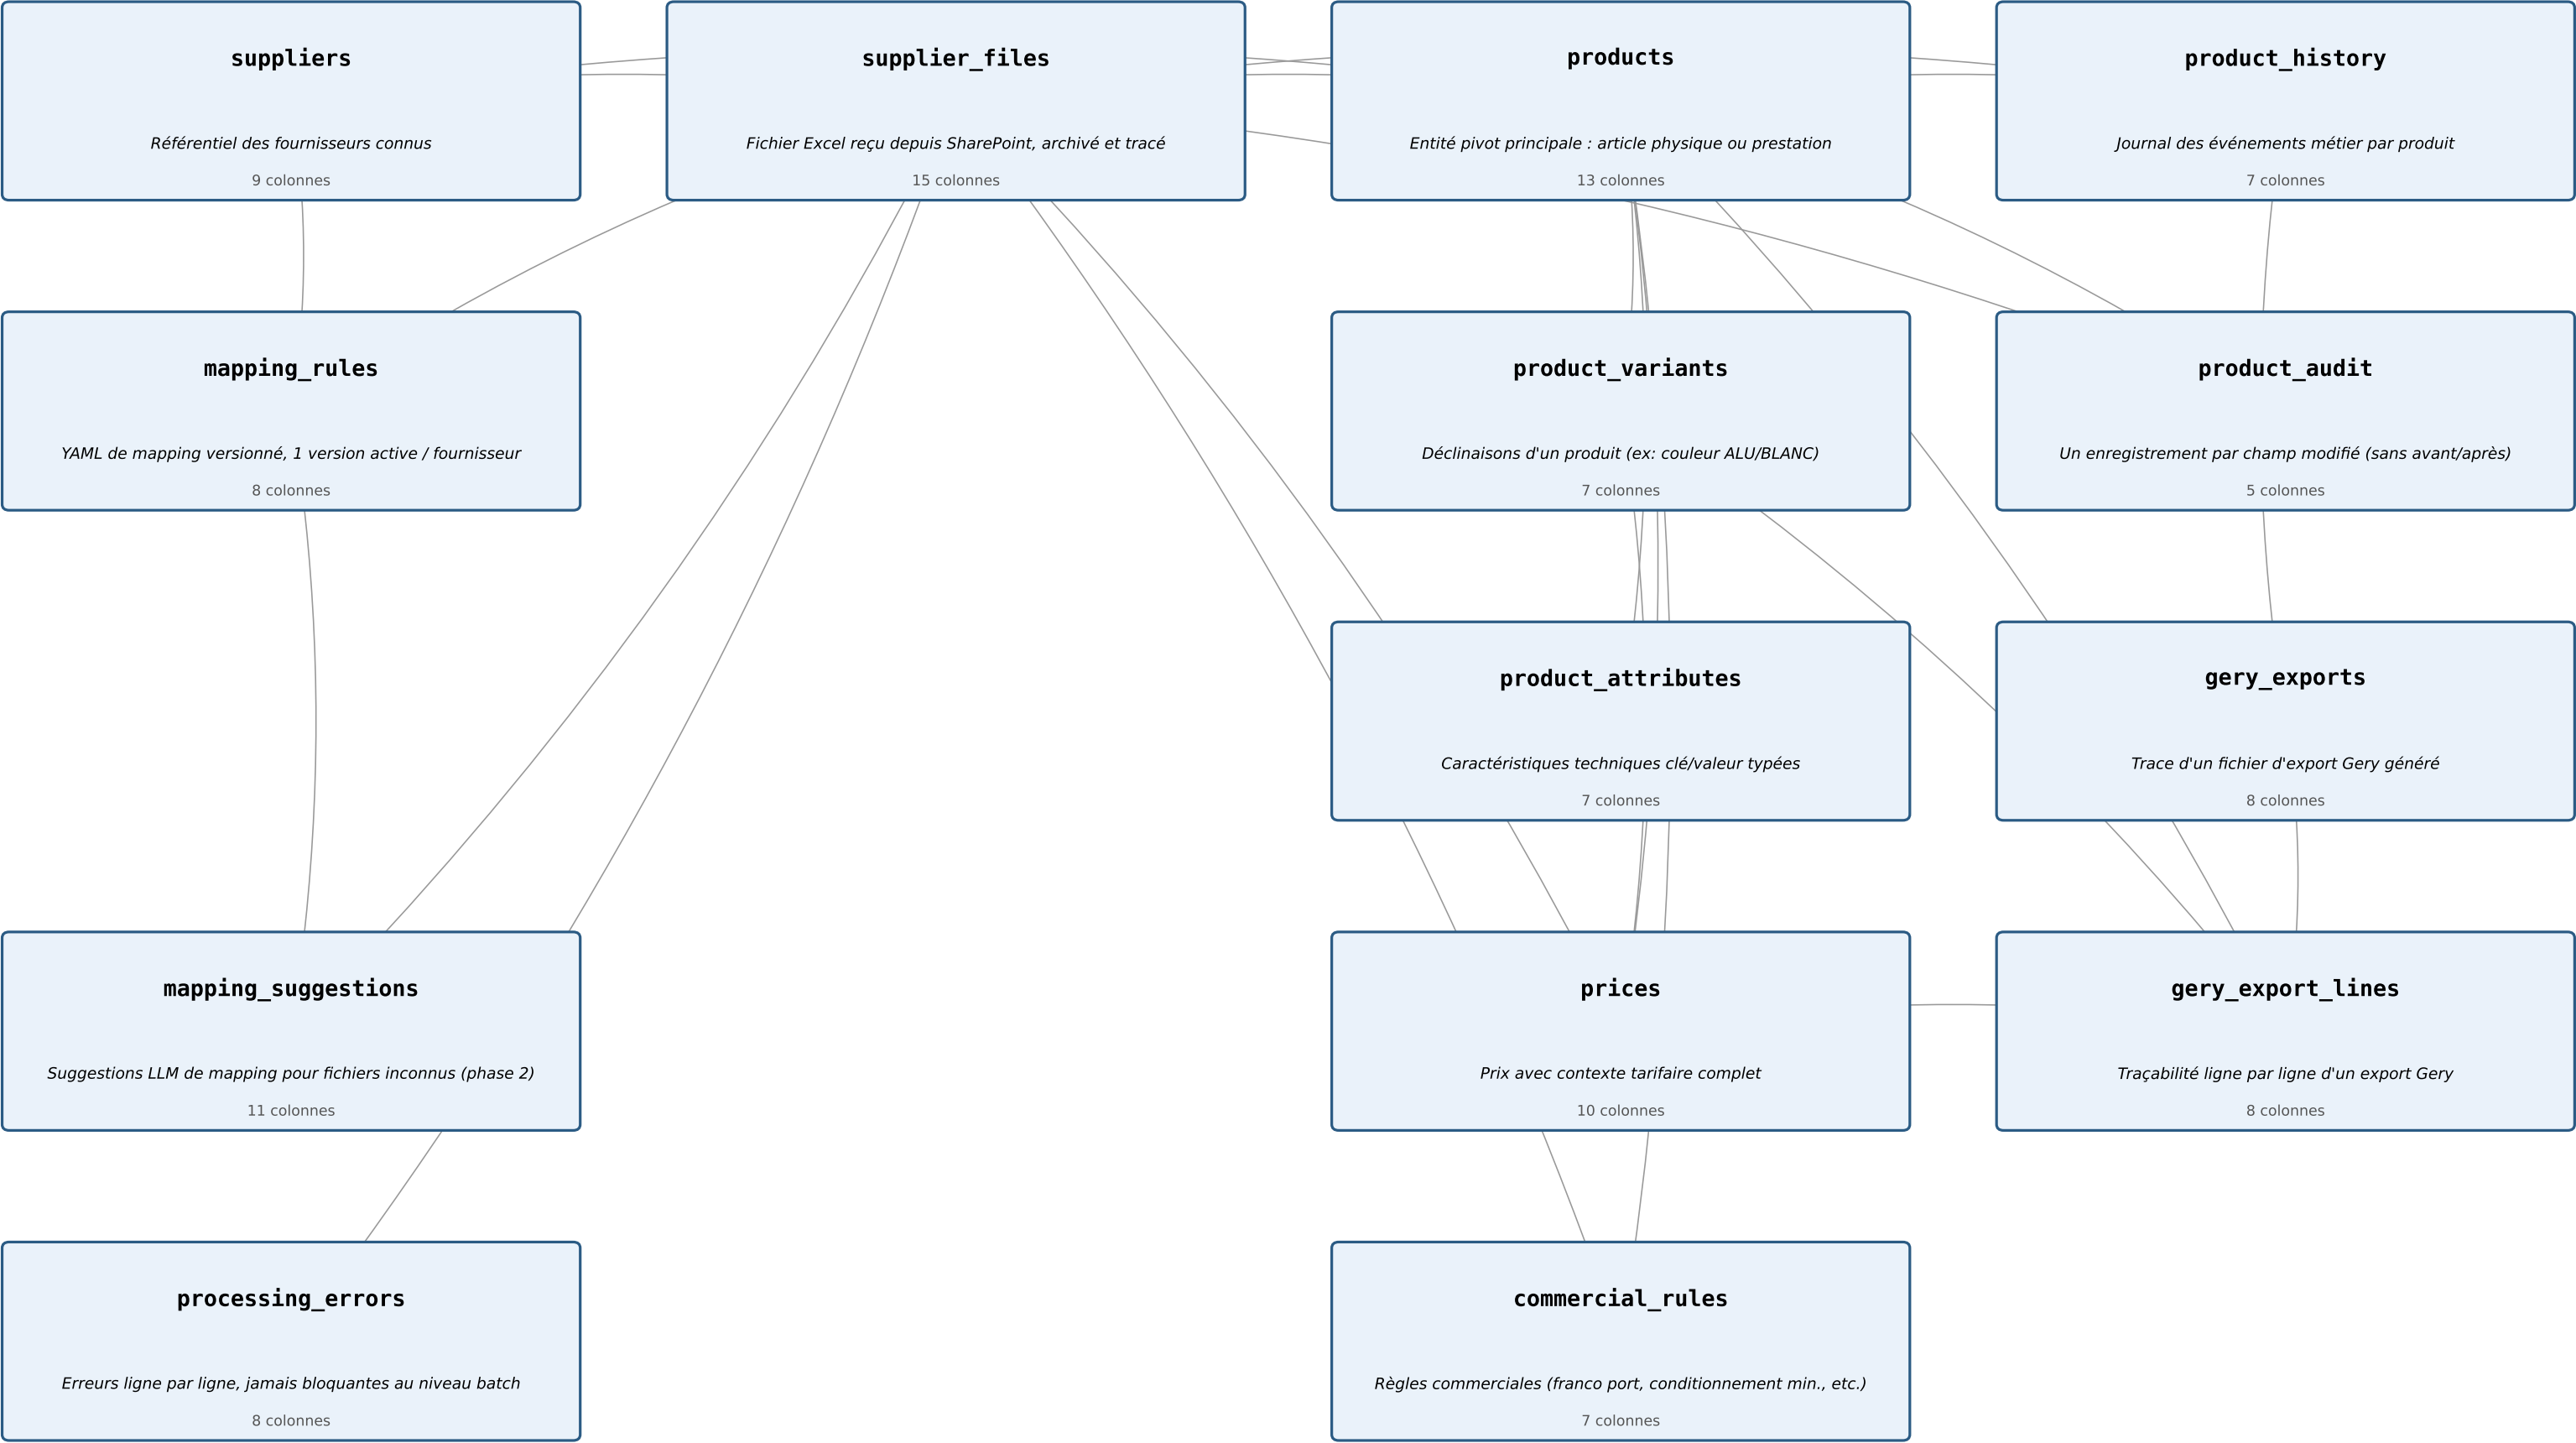

suppliers

Référentiel des fournisseurs connus

id	uuid	PK
code	string	UQ, NN
name	string	NN
sage_supplier_code	string	
sharepoint_folder	string	UQ, NN
upload_mode	string	NN, full incremental
active	bool	NN
notes	text	
created_at / updated_at	datetime	NN

mapping_rules

YAML de mapping versionné, 1 version active / fournisseur

id	uuid	PK
supplier_id	uuid	FK -> suppliers.id
version	int	NN, UQ avec supplier_id
yaml_content	text	NN
yaml_hash	string(64)	UQ, NN
active	bool	NN
validated_by / validated_at	string / datetime	
created_at	datetime	NN

supplier_files

Fichier Excel reçu depuis SharePoint, archivé et tracé

id	uuid	PK
supplier_id	uuid	FK -> suppliers.id
filename	string	NN
sharepoint_item_id / etag	string	NN / -
content_hash	string(64)	UQ, NN (idempotence)
size_bytes	bigint	NN
gcs_path	string	NN (chemin temp local)
minio_path	string	archivage objet (bucket/.../hash_uuid.xlsx)
status	string	NN, received processing processed failed skipped
received_at / processing_started_at / processing_ended_at	datetime	
error_message	text	
validity_start / validity_end	date	période de validité tarifs
contract_reference / geographic_scope / organizational_scope	string	
mapping_rule_id	uuid	FK -> mapping_rules.id
raw_metadata	jsonb	métadonnées brutes extraites du fichier

products

Entité pivot principale : article physique ou prestation

id	uuid	PK
supplier_id	uuid	FK -> suppliers.id
supplier_product_code	string	NN, UQ avec supplier_id
generic_code	string	code article générique Gery
designation	string	NN
family / subfamily	string	
product_kind	string	NN, physical service
status	string	NN, active inactive deleted
first_seen_in_file_id	uuid	FK -> supplier_files.id
last_seen_in_file_id	uuid	FK -> supplier_files.id
business_hash	string(64)	NN (détection delta, avec prix)
business_hash_no_prices	string(64)	NN (détection delta, sans prix)
created_at / updated_at	datetime	NN

product_variants

Déclinaisons d'un produit (ex: couleur ALU/BLANC)

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE)
variant_dimension	string	NN (ex: couleur)
variant_value	string	NN (ex: ALU)
variant_code	string	NN, UQ avec product_id+dimension
display_order	int	NN
created_at	datetime	NN

product_attributes

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE)
attribute_key	string	NN, UQ avec product_id
attribute_value	text	NN
data_type	string	NN, string integer decimal enum duration boolean
unit	string	ex: h, mm
created_at	datetime	NN

Caractéristiques techniques clé/valeur typées

prices

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE)
variant_id	uuid	FK -> product_variants.id (CASCADE, nullable)
price_type	string	NN (ex: forfait, unitaire)
amount	numeric(15,4)	NN, >= 0
currency	string(3)	NN, défaut EUR
tier_label / tier_min_quantity / tier_max_quantity / tier_unit	mixte	palier de prix
valid_from / valid_to	date	valid_from <= valid_to
source_file_id	uuid	FK -> supplier_files.id
created_at	datetime	NN

Prix avec contexte tarifaire complet

commercial_rules

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE, nullable)
supplier_file_id	uuid	FK -> supplier_files.id (CASCADE, nullable)
rule_type	string	NN
threshold_value / threshold_unit	numeric / string	
description / raw_text	text	
created_at	datetime	NN

Règles commerciales (franco port, conditionnement min., etc.)

product_history

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE)
change_type	string	NN, CREATE UPDATE PRICE_CHANGE DELETE REACTIVATE
source_file_id	uuid	FK -> supplier_files.id
detected_at	datetime	NN
exported_at	datetime	rempli quand exporté vers Gery
exported_in_id	uuid	FK -> gery_exports.id (SET NULL)

Journal des événements métier par produit

product_audit

id	uuid	PK
product_id	uuid	FK -> products.id (CASCADE)
field_name	string	NN (ex: price, designation, attr_xxx)
changed_at	datetime	NN
source_file_id	uuid	FK -> supplier_files.id

Un enregistrement par champ modifié (sans avant/après)

gery_exports

id	uuid	PK
export_kind	string	NN, NEW_ARTICLE FRNS_CREATE FRNS_PRICE_UPDATE
generated_at / delivered_at	datetime	
output_path	string	NN
output_hash	string(64)	NN
line_count	int	NN
status	string	NN, generated delivered acknowledged failed
ack_message	text	

Trace d'un fichier d'export Gery généré

gery_export_lines

id
export_id
product_id
variant_id
price_id
derived_code
payload
line_number

uuid
uuid
uuid
uuid
uuid
string
jsonb
int
PK
FK->gerg_exports.id, UQ+line_number
FK -> products.id (RESTRICT)
FK -> product_variants.id (RESTRICT, nullable)
FK -> prices.id (RESTRICT, nullable)
NN
NN (contenu de la ligne exportée)
NN

Traçabilité ligne par ligne d'un export Gery

mapping_suggestions

id
supplier_file_id
suggested_yaml
confidence_avg
field_confidences
warnings
status
reviewed_by / reviewed_at
approved_yaml
resulting_mapping_rule_id
created_at

uuid
uuid
text
numeric(5,4)
jsonb
jsonb
string
string / datetime
text
uuid
datetime
PK
FK -> supplier_files.id (CASCADE)
NN
NN, 0..1
NN
NN, pending|approved|rejected|modified
string / datetime
text
FK -> mapping_rules.id (SET NULL)
NN

Suggestions LLM de mapping pour fichiers inconnus (phase 2)

processing_errors

id
supplier_file_id
row_number
error_type
error_field
error_detail
raw_value
created_at

uuid
uuid
int
string
string
text
text
datetime
PK
FK -> supplier_files.id (CASCADE)
NN, parse|validation|mapping|transform
NN
NN
NN

Erreurs ligne par ligne, jamais bloquantes au niveau batch