Name : wajiha

Roll no : 26k-3157

Section : BSE-1D

Date of submission : 28/09/26

Task 1


```
#include <stdio.h>

int main() {
    float temp;

    printf("Enter temperature in Celsius: ");
    scanf("%f", &temp);

    if (temp < 15)
        printf("Cold₩n");
    else if (temp <= 30)
        printf("Normal₩n");
    else
        printf("Hot₩n");

    return 0;
}
```

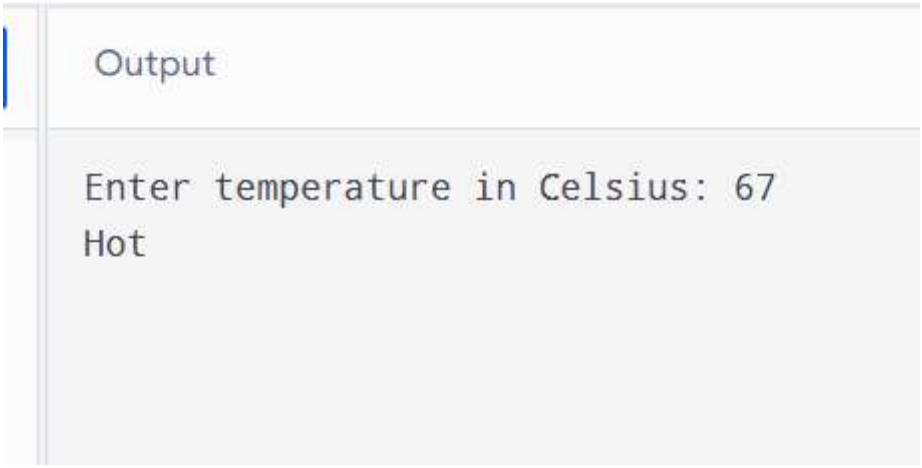

Task2

```
#include <stdio.h>


int main() {
    int balance;

    printf("Enter remaining balance: ");
    scanf("%d", &balance);

    if (balance < 500)
        printf("Low Balance₩n");
    else if (balance <= 2000)
        printf("Sufficient Balance₩n");
    else
        printf("Premium Balance₩n");

    return 0;
```

}

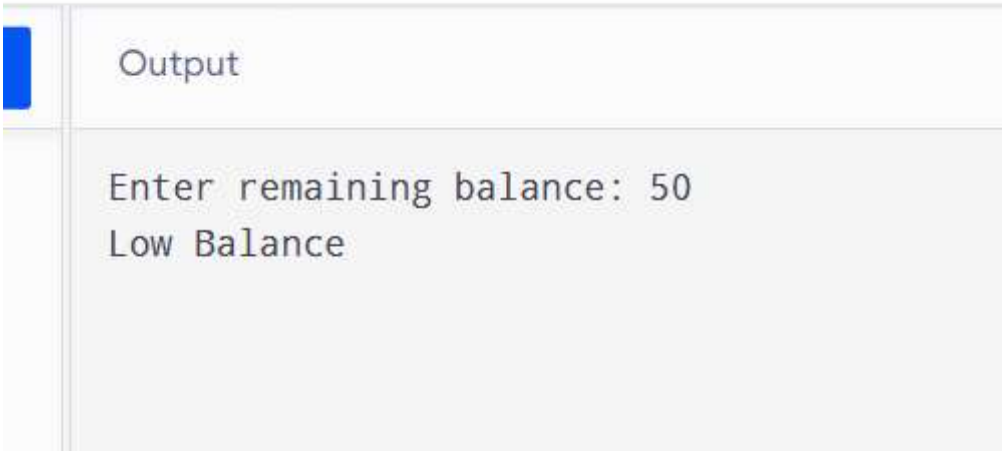

Task 3 :

```
#include <stdio.h>

int main() {
    int appointment, doctorAvailable, registrationCompleted;

    printf("Appointment booked? (1 = yes, 0 = no): ");
    scanf("%d", &appointment);
    printf("Doctor available? (1 = yes, 0 = no): ");
    scanf("%d", &doctorAvailable);
    printf("Registration completed? (1 = yes, 0 = no): ");
    scanf("%d", &registrationCompleted);
```

```
    if (appointment == 1) {
        if (doctorAvailable == 1) {
            if (registrationCompleted == 1)
                printf("The patient can meet the doctor.₩n");
            else
                printf("Registration is not completed.₩n");
        } else {
            printf("Doctor is not available.₩n");
        }
    } else {
        printf("The patient has no appointment.₩n");
    }

    return 0;
}
```

Output

```
Appointment booked? (1 = yes, 0 = no): 1
Doctor available? (1 = yes, 0 = no): 1
Registration completed? (1 = yes, 0 = no): 1
The patient can meet the doctor.
```

Task 4:


```
#include <stdio.h>

int main() {
    int restaurantOpen, itemAvailable, balanceSufficient;

    printf("Restaurant open? (1 = yes, 0 = no): ");
    scanf("%d", &restaurantOpen);
    printf("Item available? (1 = yes, 0 = no): ");
    scanf("%d", &itemAvailable);
    printf("Balance sufficient? (1 = yes, 0 = no): ");
    scanf("%d", &balanceSufficient);

    if (restaurantOpen == 1) {
        if (itemAvailable == 1) {
            if (balanceSufficient == 1)
                printf("Order placed successfully.₩n");
            else
                printf("Insufficient balance.₩n");
        } else {
            printf("Selected item is not available.₩n");
        }
    } else {
        printf("Restaurant is closed.₩n");
    }
```

```
    return 0;
}
```

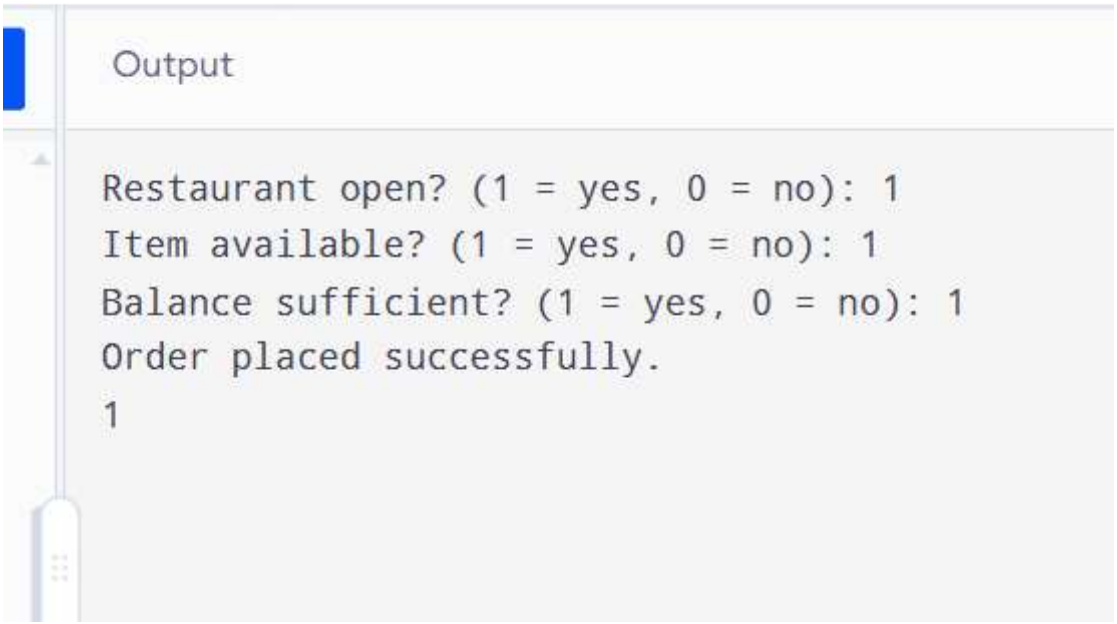

Task 5:

```
#include <stdio.h>

int main() {
    int operation, account;

    printf("ATM Operations:₩n");
    printf("1. Balance Inquiry₩n2. Cash Withdrawal₩n3. Cash Deposit₩n4. PIN Change₩n");
```

```
printf("Select operation: ");
scanf("%d", &operation);

switch (operation) {
    case 1:
        printf("You selected Balance Inquiry.₩n");
        break;

    case 2:
        printf("Cash Withdrawal - choose account:₩n");
        printf("1. Savings Account₩n2. Current Account₩n");
        printf("Enter choice: ");
        scanf("%d", &account);

        switch (account) {
            case 1:
                printf("Cash Withdrawal from Savings Account.₩n");
                break;
            case 2:
                printf("Cash Withdrawal from Current Account.₩n");
                break;
            default:
                printf("Invalid account type.₩n");
        }
        break;

    case 3:
```

```
            printf("You selected Cash Deposit.₩n");
            break;

        case 4:
            printf("You selected PIN Change.₩n");
            break;

        default:
            printf("Invalid operation.₩n");
    }

    return 0;
}
```

Output

```
ATM Operations:
1. Balance Inquiry
2. Cash Withdrawal
3. Cash Deposit
4. PIN Change
Select operation: 2
Cash Withdrawal - choose account:
1. Savings Account
2. Current Account
Enter choice: 2
Cash Withdrawal from Current Account.
```