Food Environments

Daniel Fuller

2026-09-11

Food Environments

Read in the CANUE developed food data converted to the postal code level

```
food_pc <- read_csv("/Users/dlf545/Library/CloudStorage/OneDrive-UniversityofSaskatchewan/CSDUL data/Fo
```

```
## Rows: 830889 Columns: 18
## -- Column specification --------------------------------------------------------
## Delimiter: ","
## chr  (2): postalcode18, province
## dbl (16): nhfed18_01, nhfed18_02, nhfed18_05, nhfed18_06, nhfed18_09, nhfed1...
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
glimpse(food_pc)
```

```
## Rows: 830,889
## Columns: 18
## $ postalcode18 <chr> "A0A0A1", "A0A0A2", "A0A0A3", "A0A0A4", "A0A0A5", "A0A0A6~
## $ province     <chr> "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL~
## $ nhfed18_01   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 4, 0, 0, 0, 0, 0, ~
## $ nhfed18_02   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 4, 0, 0, 0, 0, 0, ~
## $ nhfed18_05   <dbl> 0, 0, 0, 4, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_06   <dbl> 0, 0, 0, 4, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_09   <dbl> 0, 0, 0, 2, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_10   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_13   <dbl> 0, 0, 0, 3, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_14   <dbl> 0, 0, 1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_17   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_18   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_21   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 3, 0, 0, 0, 0, 0, ~
## $ nhfed18_22   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, ~
## $ nhfed18_25   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_26   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_29   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 2, 1, 0, 0, 0, 0, ~
## $ nhfed18_30   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 0, 1, 1, 0, ~
```


```
summary(food_pc$nhfed18_01)
```

```
##       Min.    1st Qu.     Median       Mean    3rd Qu.       Max.
## -9999.0000     0.0000     0.0000    -0.9004     2.0000     4.0000
```

```
ggplot(data = food_pc, aes(nhfed18_01)) +
        geom_histogram() +
```

```
        theme_minimal()
```

```
## `stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

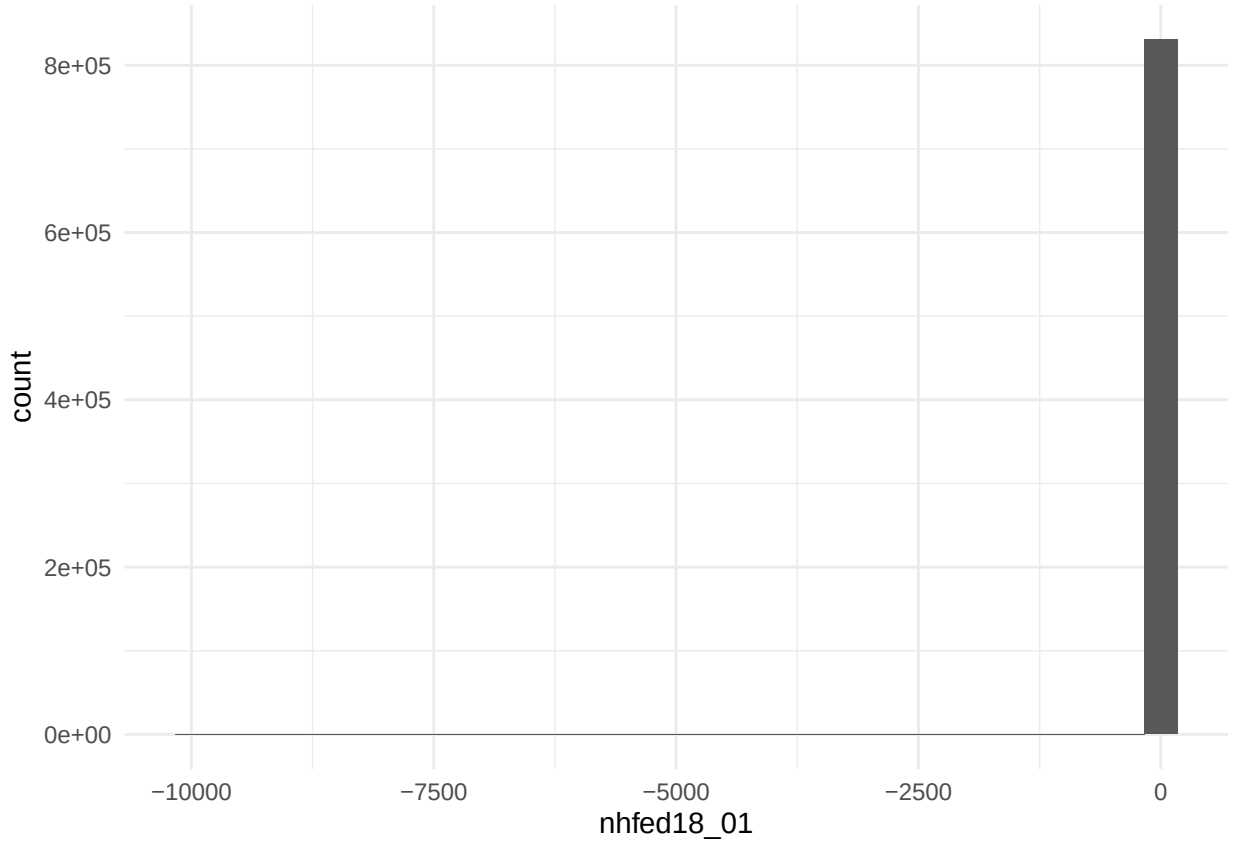


```
miss_var_summary(food_pc)
```

```
## # A tibble: 18 x 3
##    variable     n_miss pct_miss
##    <chr>         <int>    <num>
##  1 postalcode18      0        0
##  2 province          0        0
##  3 nhfed18_01        0        0
##  4 nhfed18_02        0        0
##  5 nhfed18_05        0        0
##  6 nhfed18_06        0        0
##  7 nhfed18_09        0        0
##  8 nhfed18_10        0        0
##  9 nhfed18_13        0        0
## 10 nhfed18_14        0        0
## 11 nhfed18_17        0        0
## 12 nhfed18_18        0        0
## 13 nhfed18_21        0        0
## 14 nhfed18_22        0        0
## 15 nhfed18_25        0        0
## 16 nhfed18_26        0        0
## 17 nhfed18_29        0        0
## 18 nhfed18_30        0        0
```

Joining Sprawl PC to PCCF+

Read in the PCCF+ data

```
pccf_plus <- read_csv("/Users/dlf545/Library/CloudStorage/OneDrive-UniversityofSaskatchewan/CSDUL data/
```

```
## Rows: 863541 Columns: 83
## -- Column specification --------------------------------------------------------
## Delimiter: ","
## chr (31): CODER, VERSION, PCODE, DB, DB_ir2021, CSDname, CSDtype, CMA, CMAty...
## dbl (51): PR, DAuid, CSDuid, Tracted, SACcode, SACtype, CCSuid, FEDuid, DPLu...
## lgl  (1): ID
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
glimpse(pccf_plus)
```

```
## Rows: 863,541
## Columns: 83
## $ CODER         <chr> "R", "R", "R", "R", "R", "R", "R", "R", "R", "R", "R", "~
## $ VERSION       <chr> "8B", "8B", "8B", "8B", "8B", "8B", "8B", "8B", "8B", "8~
## $ ID            <lgl> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ PCODE         <chr> "A0A0A1", "A0A0A2", "A0A0A3", "A0A0A4", "A0A0A5", "A0A0A~
## $ PR            <dbl> 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, ~
## $ DAuid         <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 100106~
## $ DB            <chr> "011", "007", "037", "005", "007", "037", "010", "036", ~
## $ DB_ir2021     <chr> "F", "F", "F", "F", "F", "F", "F", "F", "F", "F", "F", "~
## $ CSDuid        <dbl> 1001464, 1001374, 1001452, 1001434, 1001374, 1001452, 10~
## $ CSDname       <chr> "Avondale", "Division No.  1, Subd. I", "Division No.  1~
## $ CSDtype       <chr> "T", "SNO", "SNO", "T", "SNO", "SNO", "SNO", "SNO", "SNO~
## $ CMA           <chr> "000", "000", "000", "000", "000", "000", "000", "000", ~
## $ CMAtype       <chr> "G", "I", "G", "H", "I", "G", "I", "G", "G", "J", "G", "~
## $ CMAname       <chr> "Strong metropolitan influenced zone (N.L.) / Zone d'inf~
## $ CTname        <chr> "0000.00", "0000.00", "0000.00", "0000.00", "0000.00", "~
## $ Tracted       <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,~
## $ SACcode       <dbl> 996, 998, 996, 997, 998, 996, 998, 996, 996, 999, 996, 9~
## $ SACtype       <dbl> 4, 6, 4, 5, 6, 4, 6, 4, 4, 7, 4, 7, 4, 5, 6, 6, 6, 4, 6,~
## $ CCSuid        <dbl> 1001472, 1001357, 1001472, 1001472, 1001357, 1001472, 10~
## $ FEDuid        <dbl> 10001, 10001, 10001, 10001, 10001, 10001, 10001, 10001, ~
## $ FEDname       <chr> "Avalon", "Avalon", "Avalon", "Avalon", "Avalon", "Avalo~
## $ DPLuid        <dbl> 10, 100385, 10, 10, 100385, 10, 100385, 100252, 10, 10, ~
## $ DPLtype       <chr> NA, "DPL", NA, NA, "DPL", NA, "DPL", "DPL", NA, NA, NA, ~
## $ DPLname       <chr> NA, "Bristols Hope", NA, NA, "Bristols Hope", NA, "Brist~
## $ ERuid         <dbl> 1010, 1010, 1010, 1010, 1010, 1010, 1010, 1010, 1010, 10~
## $ ERname        <chr> "Avalon Peninsula", "Avalon Peninsula", "Avalon Peninsul~
## $ CARuid        <dbl> 1001, 1001, 1001, 1001, 1001, 1001, 1001, 1001, 1001, 10~
## $ CARname       <chr> "Census Agricultural Region 1", "Census Agricultural Reg~
## $ PopCtrRAPuid  <dbl> 109910, 100136, 109910, 109910, 100136, 109910, 100136, ~
## $ PopCtrRAname  <chr> "Newfoundland and Labrador Rural Area / R\xe9gion rurale~
## $ PopCtrRAtype  <dbl> 5, 4, 5, 5, 4, 5, 4, 5, 5, 5, 5, 5, 5, 5, 4, 5, 5, 5, 4,~
## $ PopCtrRAclass <dbl> 1, 2, 1, 1, 2, 1, 2, 1, 1, 1, 1, 1, 1, 1, 2, 1, 1, 1, 2,~
## $ CSize         <dbl> 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5,~
## $ CSizeMIZ      <dbl> 5, 7, 5, 6, 7, 5, 7, 5, 5, 7, 5, 7, 5, 6, 7, 7, 7, 5, 7,~
## $ HRuid         <dbl> 1021, 1021, 1021, 1021, 1021, 1021, 1021, 1021, 1021, 10~
## $ HRename       <chr> "Eastern Rural Zone", "Eastern Rural Zone", "Eastern Rur~
```

```
## $ HRfname       <chr> "Eastern Rural Zone", "Eastern Rural Zone", "Eastern Rur~
## $ AHRuid        <dbl> 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, 10, ~
## $ AHRename      <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ AHRfname      <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ SLI           <dbl> 1, 9, 9, 1, 9, 9, 9, 9, 9, 1, 1, 1, 1, 1, 9, 9, 9, 9, 9,~
## $ Rep_Pt_type   <dbl> 3, 9, 9, 3, 9, 9, 3, 9, 9, 3, 3, 3, 3, 3, 9, 9, 9, 9, 9,~
## $ RPF           <dbl> 3, 6, 6, 3, 6, 6, 5, 6, 6, 3, 3, 3, 3, 3, 6, 6, 6, 6, 6,~
## $ PCtype        <dbl> 3, 9, 9, 3, 9, 9, 9, 9, 9, 3, 3, 3, 3, 3, 9, 9, 9, 9, 9,~
## $ DMT           <chr> "W", "9", "9", "W", "9", "9", "W", "9", "9", "W", "W", "~
## $ H_DMT         <chr> "W", NA, NA, "W", NA, NA, "W", NA, NA, "W", "W", "W", "W~
## $ DMTDIFF       <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ PO            <dbl> 1, 2, 2, 1, 2, 2, 2, 2, 2, 1, 1, 1, 1, 1, 2, 2, 2, 2, 2,~
## $ QI            <chr> "NNN", "999", "999", "NNN", "999", "999", "999", "999", ~
## $ Source        <dbl> 1, 9, 9, 1, 9, 9, 9, 9, 9, 1, 1, 1, 6, 1, 9, 9, 9, 9, 9,~
## $ Lat           <dbl> 47.39675, 47.71381, 47.35304, 47.52908, 47.71381, 47.353~
## $ Long          <dbl> -53.22259, -53.21024, -53.29517, -53.27264, -53.21024, -~
## $ Link_Source   <chr> "F", "5", "5", "F", "5", "5", "C", "5", "5", "F", "F", "~
## $ Link          <dbl> 9, 0, 0, 9, 0, 0, 7, 0, 0, 9, 9, 6, 9, 9, 0, 0, 0, 0, 0,~
## $ nCD           <dbl> 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,~
## $ nCSD          <dbl> 1, 2, 2, 1, 2, 2, 1, 2, 2, 1, 1, 2, 1, 1, 2, 2, 2, 2, 2,~
## $ PREC          <chr> "5", "4", "4", "5", "4", "4", "5", "4", "4", "5", "5", "~
## $ Comm_Name     <chr> "AVONDALE", NA, NA, "SOUTH RIVER", NA, NA, NA, NA, NA, "~
## $ AirLift       <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ InstFlag      <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ Resflag       <chr> NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, NA, ~
## $ InuitLands    <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,~
## $ BTIPPE        <dbl> 44735, 58153, 55655, 55928, 58153, 55655, 58153, 55655, ~
## $ ATIPPE        <dbl> 39951, 49097, 49980, 49108, 49097, 49980, 49097, 49980, ~
## $ QABTIPPE      <dbl> 2, 4, 4, 4, 4, 4, 4, 4, 4, 999, 3, 4, 4, 2, 4, 4, 4, 4, ~
## $ QNBTIPPE      <dbl> 1, 2, 2, 2, 2, 2, 2, 2, 2, 999, 2, 2, 2, 1, 2, 2, 2, 2, ~
## $ DABTIPPE      <dbl> 4, 8, 8, 8, 8, 8, 8, 8, 8, 999, 6, 7, 7, 3, 8, 8, 8, 8, ~
## $ DNBTIPPE      <dbl> 2, 4, 4, 4, 4, 4, 4, 4, 4, 999, 3, 3, 3, 2, 4, 4, 4, 4, ~
## $ QAATIPPE      <dbl> 2, 4, 5, 4, 4, 5, 4, 5, 5, 999, 3, 4, 4, 1, 4, 4, 4, 5, ~
## $ QNATIPPE      <dbl> 1, 2, 2, 2, 2, 2, 2, 2, 2, 999, 1, 2, 2, 1, 2, 2, 2, 2, ~
## $ DAATIPPE      <dbl> 4, 8, 9, 8, 8, 9, 8, 9, 9, 999, 6, 7, 8, 2, 8, 8, 8, 9, ~
## $ DNATIPPE      <dbl> 2, 4, 4, 4, 4, 4, 4, 4, 4, 999, 2, 3, 4, 1, 4, 4, 4, 4, ~
## $ IMPFLG        <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0,~
## $ DA11uid       <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 100106~
## $ DB11uid       <dbl> 1001056204, 1001052007, 1001069014, 1001054905, 10010520~
## $ DA06uid       <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 100106~
## $ DA01uid       <dbl> 10010112, 10010372, 10010117, 10010088, 10010372, 100101~
## $ EA96uid       <dbl> 10006006, 10001056, 10007086, 10001005, 10001056, 100070~
## $ EA91uid       <dbl> 10006006, 10001056, 10007086, 10001005, 10001056, 100070~
## $ EA86uid       <dbl> 10006018, 10001062, 10006004, 10001009, 10001062, 100060~
## $ EA81uid       <dbl> 10006018, 10001062, 10006003, 10001009, 10001062, 100060~
## $ DA16uid       <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 100106~
## $ DB16uid       <dbl> 10010562004, 10010520007, 10010690014, 10010549005, 1001~
```

```
pccf_plus <- pccf_plus |> select(PCODE, CTname, DAuid, CSDuid, CMA, Tracted, DA16uid, DB16uid, Lat, Lon
```

```
food_join <- full_join(food_pc, pccf_plus, c("postalcode18" = "PCODE"))

food_join <- food_join %>% replace_with_na(replace = list(nhfed18_01 = -9999.0000))
food_join <- food_join %>% replace_with_na(replace = list(nhfed18_01 = -9))
```


```
summary(food_join$nhfed18_01)
```

```
##    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.     NAs
##   0.000   0.000   0.000   1.097   2.000   4.000   42666
```

```
ggplot(data = food_join, aes(nhfed18_01)) +
       geom_histogram() +
       theme_minimal()
```

```
## `stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

```
## Warning: Removed 42666 rows containing non-finite outside the scale range
## (`stat_bin()`).
```

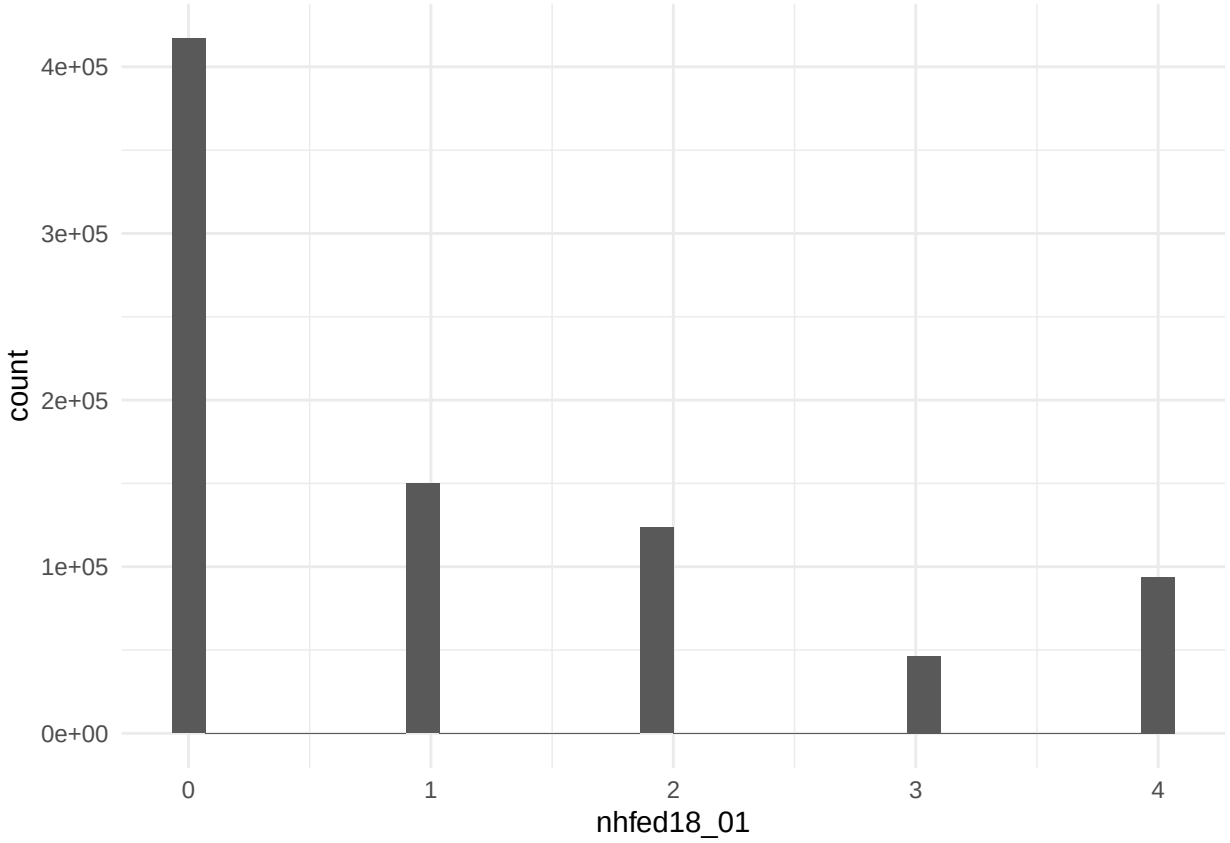

We remove food values of -9999.0000 and -9 because those are missing.

Group by DA for joined data

Do a group by 2016 DA to be able to join the CANUE sprawl data to the original sprawl data as a check.

```
glimpse(food_join)
```

```
## Rows: 873,389
## Columns: 27
## $ postalcode18 <chr> "A0A0A1", "A0A0A2", "A0A0A3", "A0A0A4", "A0A0A5", "A0A0A6~
## $ province     <chr> "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL", "NL~
## $ nhfed18_01   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 4, 0, 0, 0, 0, 0, ~
## $ nhfed18_02   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 4, 0, 0, 0, 0, 0, ~
## $ nhfed18_05   <dbl> 0, 0, 0, 4, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
```

```
## $ nhfed18_06   <dbl> 0, 0, 0, 4, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_09   <dbl> 0, 0, 0, 2, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_10   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_13   <dbl> 0, 0, 0, 3, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_14   <dbl> 0, 0, 1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_17   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_18   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_21   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 3, 0, 0, 0, 0, 0, ~
## $ nhfed18_22   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, ~
## $ nhfed18_25   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_26   <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ nhfed18_29   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 2, 1, 0, 0, 0, 0, ~
## $ nhfed18_30   <dbl> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 0, 1, 1, 0, ~
## $ CTname       <chr> "0000.00", "0000.00", "0000.00", "0000.00", "0000.00", "0~
## $ DAuid        <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 1001069~
## $ CSDuid       <dbl> 1001464, 1001374, 1001452, 1001434, 1001374, 1001452, 100~
## $ CMA          <chr> "000", "000", "000", "000", "000", "000", "000", "000", "~
## $ Tracted      <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ~
## $ DA16uid      <dbl> 10010562, 10010520, 10010690, 10010549, 10010520, 1001069~
## $ DB16uid      <dbl> 10010562004, 10010520007, 10010690014, 10010549005, 10010~
## $ Lat          <dbl> 47.39675, 47.71381, 47.35304, 47.52908, 47.71381, 47.3530~
## $ Long         <dbl> -53.22259, -53.21024, -53.29517, -53.27264, -53.21024, -5~
```

```
food_join_da <- food_join |>
                    group_by(DA16uid) |>
                      summarize(
                        nhfed18_01 = mean(nhfed18_01, na.rm = TRUE),
                        postalcode18 = first(postalcode18),
                        DB16uid = first(DB16uid),
                        CTname = first(CTname),
                        CMA = first(CMA),
                        Tracted = first(Tracted),
                        Lat = median(Lat, na.rm = TRUE),
                        Long = median(Long, na.rm = TRUE),
                       )
```

Join OG Sprawl data with CANUE PC Sprawl data

Here the CT name variable is sort of a mess, not clear why they don't have a proper CT variable. So I went here https://www12.statcan.gc.ca/census-recensement/alternative_alternatif.cfm?l=eng&dispext=zip&teng=2016_92-151_XBB_csv.zip&loc=http://www12.statcan.gc.ca/census-recensement/2016/geo/ref/gaf/files-fichiers/2016_92-151_XBB_csv.zip&k=%20%20%20%2023271 to get the proper conversion file from DAIUD to CT.

Select the variables we want from the 2016 census geography conversion file.

```
conv_file <- read_csv("/Users/dlf545/Library/CloudStorage/OneDrive-UniversityofSaskatchewan/CSDUL data/
```

```
## Rows: 489905 Columns: 48
## -- Column specification --------------------------------------------------------
## Delimiter: ","
## chr (24): PRname/PRnom, PRename/PRanom, PRfname/PRfnom, PReabbr/PRaabbrev, P...
## dbl (23): DBuid/IDidu, DBpop2016/IDpop2016, DBtdwell2016/IDtlog2016, DBurdwe...
## lgl  (1): DBir2016/IDri2016
##
## i Use `spec()` to retrieve the full column specification for this data.
```

```
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
glimpse(conv_file)
```

```
## Rows: 489,905
## Columns: 48
## $ `DBuid/IDidu`                  <dbl> 10020117004, 10020117003, 10020117008, ~
## $ `DBpop2016/IDpop2016`          <dbl> 36, 35, 46, 30, 26, 78, 93, 0, 100, 0, ~
## $ `DBtdwell2016/IDtlog2016`      <dbl> 13, 21, 28, 28, 44, 35, 39, 0, 46, 0, 1~
## $ `DBurdwell2016/IDrh2016`       <dbl> 10, 16, 21, 15, 17, 33, 37, 0, 41, 0, 1~
## $ `DBarea2016/IDsup2016`         <dbl> 0.6124, 3.8578, 0.3800, 7.7079, 3.9179,~
## $ `DBir2016/IDri2016`            <lgl> FALSE, FALSE, FALSE, FALSE, FALSE, FALS~
## $ `DAuid/ADidu`                  <dbl> 10020117, 10020117, 10020117, 10010746,~
## $ `DArplamx/ADlamx`              <dbl> 8852175, 8852175, 8852175, 8927992, 892~
## $ `DArplamy/ADlamy`              <dbl> 1980863, 1980863, 1980863, 2040576, 204~
## $ `DArplat/Adlat`                <dbl> 46.93298, 46.93298, 46.93298, 47.00466,~
## $ `DArplong/ADlong`              <dbl> -55.36201, -55.36201, -55.36201, -54.10~
## $ `PRuid/PRidu`                  <dbl> 10, 10, 10, 10, 10, 10, 10, 10, 10, 10,~
## $ `PRname/PRnom`                 <chr> "Newfoundland and Labrador / Terre-Neuv~
## $ `PRename/PRanom`               <chr> "Newfoundland and Labrador", "Newfoundl~
## $ `PRfname/PRfnom`               <chr> "Terre-Neuve-et-Labrador", "Terre-Neuve~
## $ `PReabbr/PRaabbrev`            <chr> "N.L.", "N.L.", "N.L.", "N.L.", "N.L.",~
## $ `PRfabbr/PRfabbrev`            <chr> "T.-N.-L.", "T.-N.-L.", "T.-N.-L.", "T.~
## $ `FEDuid/CEFidu`                <dbl> 10002, 10002, 10002, 10001, 10001, 1000~
## $ `FEDname/CEFnom`               <chr> "Bonavista--Burin--Trinity", "Bonavista~
## $ `ERuid/REidu`                  <dbl> 1020, 1020, 1020, 1010, 1010, 1020, 102~
## $ `ERname/REnom`                 <chr> "South Coast--Burin Peninsula / C\xf4te~
## $ `CDuid/DRidu`                  <dbl> 1002, 1002, 1002, 1001, 1001, 1002, 100~
## $ `CDname/DRnom`                 <chr> "Division No.  2", "Division No.  2", "~
## $ `CDtype/DRgenre`               <chr> "CDR", "CDR", "CDR", "CDR", "CDR", "CDR~
## $ `ADAuid/ADAidu`                <dbl> 10020001, 10020001, 10020001, 10010035,~
## $ ADAcode                        <chr> "0001", "0001", "0001", "0035", "0035",~
## $ `CSDuid/SDRidu`                <dbl> 1002006, 1002006, 1002006, 1001214, 100~
## $ `CSDname/SDRnom`               <chr> "Division No.  2, Subd. F", "Division N~
## $ `CSDtype/SDRgenre`             <chr> "SNO", "SNO", "SNO", "SNO", "SNO", "SNO~
## $ `SACtype/CSSgenre`             <dbl> 7, 7, 7, 7, 7, 5, 5, 7, 7, 7, 7, 7, 5, ~
## $ `SACcode/CSScode`              <chr> "999", "999", "999", "999", "999", "997~
## $ `CCSuid/SRUidu`                <dbl> 1002001, 1002001, 1002001, 1001214, 100~
## $ `CCSname/SRUnom`               <chr> "Division No.  2, Subd. E", "Division N~
## $ `DPLuid/LDidu`                 <dbl> 100100, 100100, 100100, 100101, 100101,~
## $ `DPLname/LDnom`                <chr> "Little St. Lawrence", "Little St. Lawr~
## $ `DPLtype/LDgenre`              <chr> "DPL", "DPL", "DPL", "DPL", "DPL", "DPL~
## $ `CMAPuid/RMRPidu`              <dbl> 10999, 10999, 10999, 10999, 10999, 1099~
## $ `CMAuid/RMRidu`                <chr> "999", "999", "999", "999", "999", "997~
## $ `CMAname/RMRnom`               <chr> "No metropolitan influenced zone (N.L.)~
## $ `CMAtype/RMRgenre`             <chr> "J", "J", "J", "J", "J", "H", "H", "J",~
## $ `CTuid/SRidu`                  <chr> "9910.00", "9910.00", "9910.00", "9910.~
## $ `CTcode/SRcode`                <chr> "9910", "9910", "9910", "9910", "9910",~
## $ `CTname/SRnom`                 <chr> "9910.00", "9910.00", "9910.00", "9910.~
## $ `POPCTRRAPuid/CTRPOPRRPidu`    <dbl> 109910, 109910, 109910, 109910, 109910,~
## $ `POPCTRRAuid/CTRPOPRRidu`      <chr> "9910", "9910", "9910", "9910", "9910",~
## $ `POPCTRRAname/CTRPOPRRnom`     <chr> "Newfoundland and Labrador Rural Area /~
## $ `POPCTRRAtype/CTRPOPRRgenre`   <dbl> 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, ~
## $ `POPCTRRAclass/CTRPOPRRclasse` <dbl> 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, ~
```

	n=48796
food environment	
Mean (sd)	1.1 (1.3)
Median (Q1,Q3)	0.9 (0.0, 2.0)
Range (min, max)	(0, 4)
Missing	753

```
conv_file <- conv_file |> select('DAuid/ADidu', 'CTuid/SRidu', 'CMAuid/RMRidu', 'CTcode/SRcode', 'CTname
```

```
food_da_conv <- left_join(food_join_da, conv_file, c("DA16uid" = "DAuid/ADidu"))

food_da_conv$`CTuid/SRidu` <- as.numeric(food_da_conv$`CTuid/SRidu`)
```

Select and write a new clean file

```
food_data_CSDUL <- food_da_conv

selection <- c(
  da16uid = "DA16uid",
  postalcode18 = "postalcode18",
  cmauid = "CMAuid/RMRidu",
  ctcode = "CTcode/SRcode",
  ctname = "CTname/SRnom",
  food_environment = "nhfed18_01"
)

food_data_CSDUL <- food_data_CSDUL |> select(all_of(selection))

food_data_CSDUL <- distinct(food_data_CSDUL)

write_csv(food_data_CSDUL, "/Users/dlf545/Library/CloudStorage/OneDrive-UniversityofSaskatchewan/CSDUL
```


Descriptive Statistics

```
rm_covsum(data=food_data_CSDUL,
covs=c('food_environment'),all.stats = TRUE)
```

```
ggplot(food_data_CSDUL) +
      geom_histogram(aes(food_environment))
```

```
## `stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

```
## Warning: Removed 753 rows containing non-finite outside the scale range
## (`stat_bin()`).
```

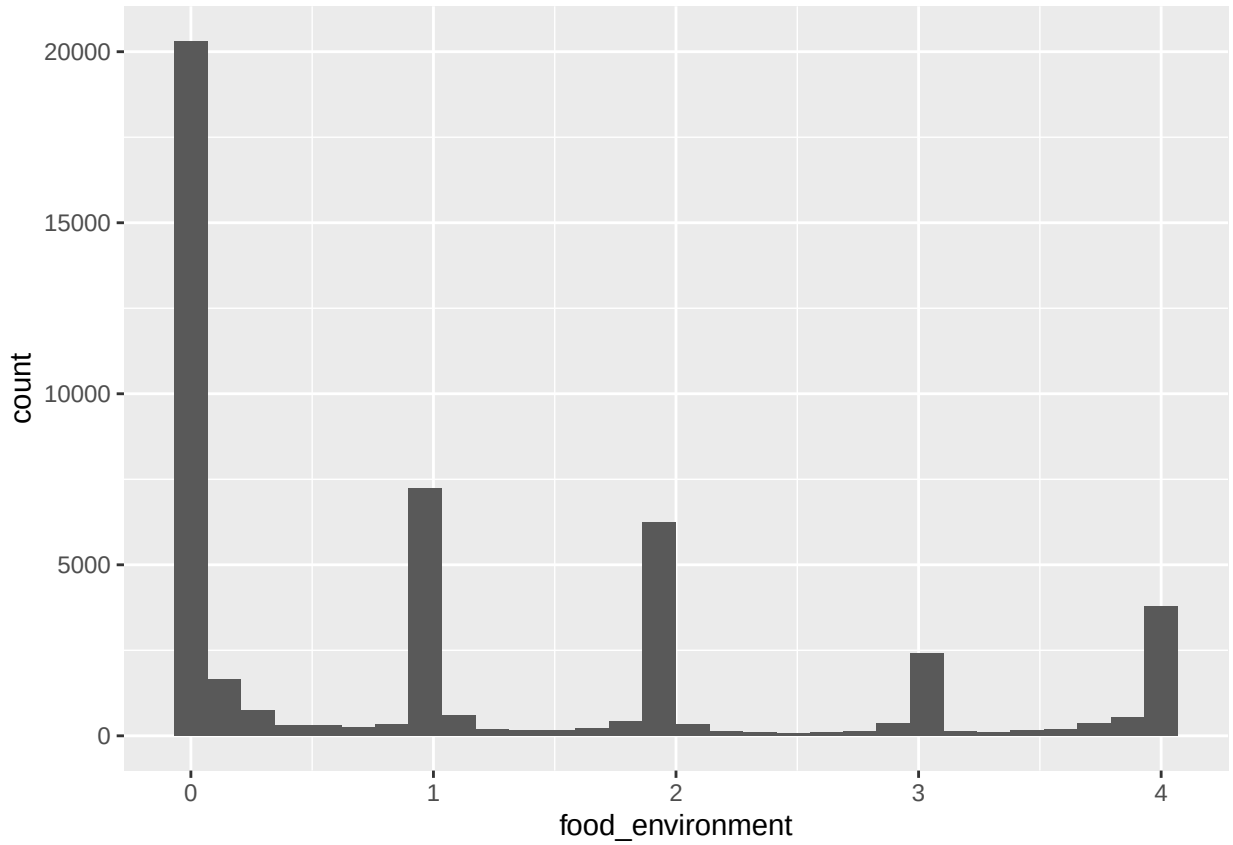


Mapping

```
da_map <- read_sf("/Users/dlf545/Library/CloudStorage/OneDrive-UniversityofSaskatchewan/CSDUL data/CSDU

da_map$DAUID <- as.numeric(da_map$DAUID)

map <- full_join(da_map, food_data_CSDUL, c("DAUID" = "da16uid"))


ggplot() +
  geom_sf(data = map, aes(fill = food_environment), color = NA) +
  scale_fill_viridis_c() +
  theme_void()
```

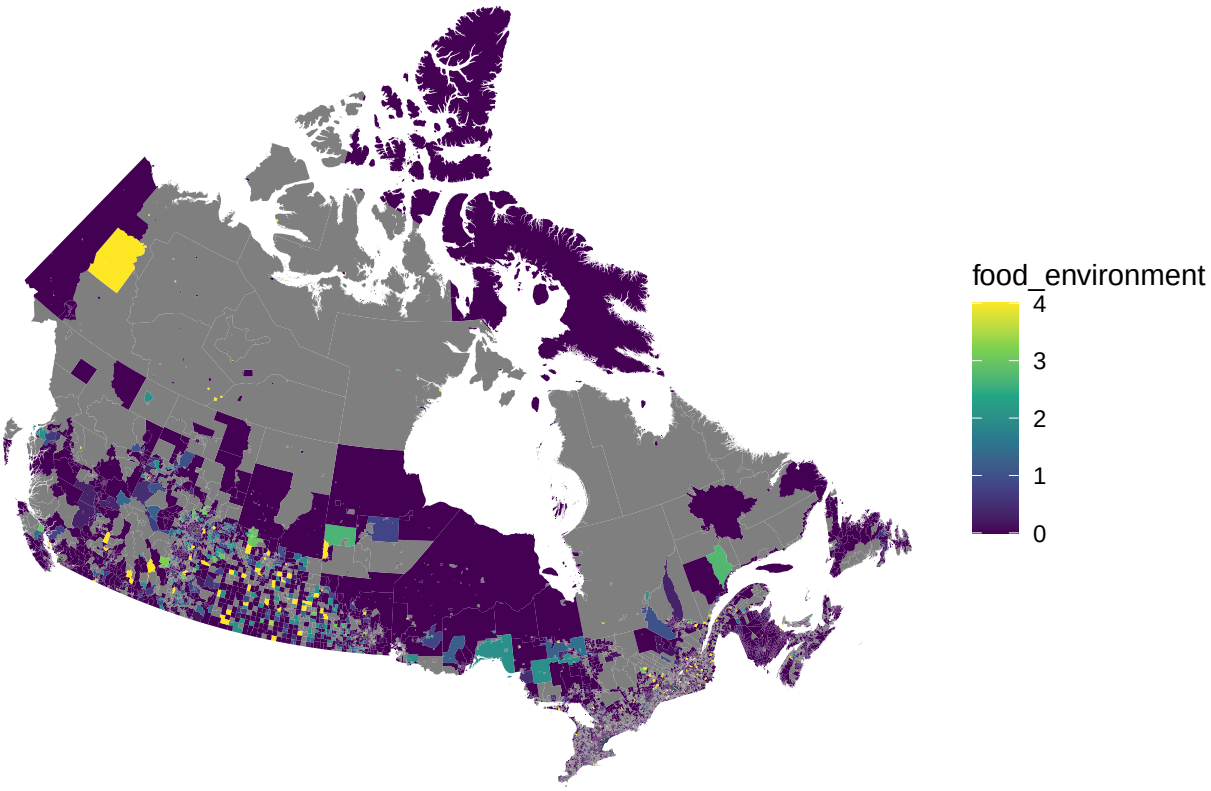

Map for Saskatchewan only

```
sask_map <- map |> filter(PRNAME == "Saskatchewan")

ggplot() +
  geom_sf(data = sask_map, aes(fill = food_environment), color = NA) +
  scale_fill_viridis_c() +
  theme_void()
```

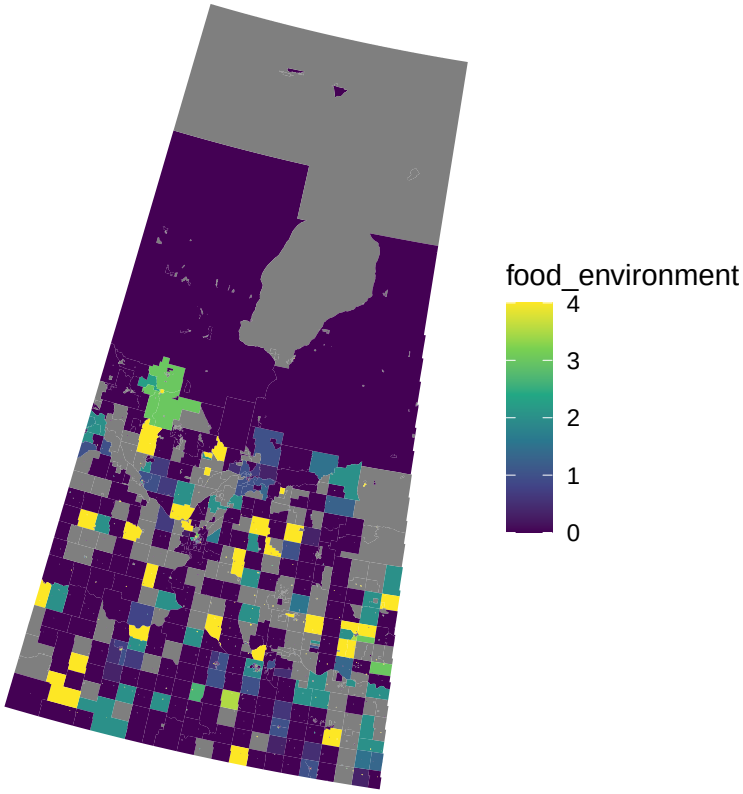
food_environment
4
3
2
1
0