



Universidade de Brasília

Tomate Cerveja

Wallace Wu, Pedro Gallo, Henrique Ramos

1

Contest

2

Data structures

3

Dynamic Programming

4

Game theory

5

Geometry

6

Graph

7

Mathematics

8

Number theory

9

Strings

10

Miscellaneous

Contest (1)

template.cpp47 lines

```
#include <bits/stdc++.h>
using namespace std;
#define sws cin.tie(0)->sync_with_stdio(0)

#define endl '\n'
#define ll long long
#define ld long double
#define pb push_back
#define ff first
#define ss second
#define pll pair<ll, ll>
#define vll vector<ll>

#define teto(a, b) ((a)+(b)-1)/(b)
#define LSB(i) ((i) & -(i))
#define MSB(i) (63 - __builtin_clzll(i)) // for ll
#define BITS(i) __builtin_popcountll(i)

template<class A> void debug(A a) {
    cout << "container: ";
    for(auto b : a) cout << b << " ";
    cout << endl;
}

template<class... A> void dbg(A const&... a) {
    ((cout << "{ " << a << " } ", ...);
    cout << endl;
}

const ll MAX = 2e5+10;
const ll MOD = 998'244'353;
const ll INF = INT32_MAX; // INT64_MAX
const ld EPS = 1e-7;
const ld PI = acos(-1);

#include <chrono>
using namespace std::chrono;
int32_t main(){ sws;
    auto start = high_resolution_clock::now();
```

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

1001

1002

1003

1004

1005

1006

1007

1008

1009

1010

1011

1012

1013

1014

1015

1016

1017

1018

1019

1020

1021

1022

1023

1024

1025

1026

1027

1028

1029

1030

1031

1032

1033

1034

1035

1036

1037

1038

1039

1040

1041

1042

1043

1044

1045

1046

1047

1048

1049

1050

1051

1052

1053

1054

1055

1056

1057

1058

1059

1060

1061

1062

1063

1064

1065

1066

1067

1068

1069

1070

1071

1072

1073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086

1087

1088

1089

1090

1091

1092

1093

1094

1095

1096

1097

1098

1099

1100

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

1136

1137

1138

1139

1140

1141

1142

1143

1144

1145

1146

1147

1148

1149

1150

1151

1152

1153

1154

1155

1156

1157

1158

1159

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1170

1171

1172

1173

1174

1175

1176

1177

1178

1179

1180

1181

1182

1183

1184

1185

1186

1187

1188

1189

1190

1191

1192

1193

1194

1195

1196

1197

1198

1199

1200

1201

1202

1203

1204

1205

1206

1207

1208

1209

1210

1211

1212

1213

1214

1215

1216

1217

1218

1219

1220

1221

1222

1223

1224

1225

1226

1227

1228

1229

1230

1231

1232

1233

1234

1235

1236

1237

1238

1239

1240

1241

1242

1243

1244

1245

1246

1247

1248

1249

1250

1251

1252

1253

1254

1255

1256

1257

1258

1259

1260

1261

1262

1263

1264

1265

1266

1267

1268

1269

1270

1271

1272

1273

1274

1275

1276

1277

1278

1279

1280

1281

1282

1283

1284

1285

1286

1287

1288

1289

1290

1291

1292

1293

1294

1295

1296

1297

1298

1299

1300

1301

1302

1303

1304

1305

1306

1307

1308

1309

1310

1311

1312

1313

1314

1315

1316

1317

1318

1319

1320

1321

1322

1323

1324

1325

1326

1327

1328

1329

1330

1331

1332

1333

1334

1335

1336

1337

1338

1339

1340

1341

1342

1343

1344

1345

1346

1347

1348

1349

1350

1351

1352

1353

1354

1355

1356

1357

1358

1359

1360

1361

1362

1363

1364

1365

1366

1367

1368

1369

1370

1371

1372

1373

1374

1375

1376

1377

1378

1379

1380

1381

1382

1383

1384

1385

1386

1387

1388

1389

1390

1391

1392

1393

1394

1395

1396

1397

1398

1399

1400

1401

1402

1403

1404

1405

1406

1407

1408

1409

1410

1411

1412

1413

1414

1415

1416

1417

1418

1419

1420

1421

1422

1423

1424

```
for(ll j=0; j<m; j++) {
    char c; cin >> c;
    if (c == '*') grid[i][j] = 0;
    else if (i == 0) grid[i][j] = 1;
    else grid[i][j] = grid[i-1][j] + 1;
}

ll area = 0;
for(ll i=0; i<n; i++) {
    area = max(area, maxRectangleHistogram(grid[i]));
}

cout << area << endl;
}
```

Also can be used to solve the maximum rectangle in a grid, with some blocked spots:

max-rectangle-grid.cpp

Description: solves the problem of finding the maximum rectangle area in a histogram setting (same bottom, different heights).
Time: $\mathcal{O}(n)$

```
8610da, 38 lines
// Example Problem: A fence consists of n vertical boards. The
// width of each board is 1 and their heights may vary.
// You want to attach a rectangular advertisement to the fence.
// What is the maximum area of such an advertisement?

ll maxRectangleHistogram(vector<ll> x) { // O(n)

    // add an end point with heighth 0 to compute the last
    // rectangles
    x.pb(0);

    ll area = 0;
    ll n = x.size();
    stack<pll, vector<pll>> st; // {maxLeft, height for this
    // rectangle}

    for(ll i=0; i<n; i++) {
        ll h = x[i];
        ll maxLeft = i;

        while(!st.empty() and st.top().ss >= h) {
            auto [maxLeft2, h2] = st.top(); st.pop();

            // compute the area of the de-stacked rectangle
            area = max(area, (i-maxLeft2)*h2 );

            // extend current rectangle width with previous
            maxLeft = maxLeft2;
        }

        st.push({maxLeft, h});
    }

    return area;
}

int32_t main(){ sws;
ll n; cin >> n;
vector<ll> x;
for(ll i=0, a; i<n; i++) cin >> a, x.pb(a);
cout << maxRectangleHistogram(x) << endl;
}
```

2.2 List

`std::list` is a container that supports constant time insertion and removal of elements from anywhere in the container.

Adding, removing and moving the elements within the list or across several lists does not invalidate the iterators or references. An iterator is invalidated only when the corresponding element is deleted.

Element Access: $\mathcal{O}(1)$

- `list.back()`
- `list.front()`

Modifiers: $\mathcal{O}(1)$

- `list.insert(itr, val)` inserts val before itr and returns an itr to the inserted value
- `list.erase(itr)` erases the element referenced by itr and returns the itr for the next value (or .end())
- `list.push_back(val)`
- `list.pop_back(val)`
- `list.push_front(val)`
- `list.pop_front(val)`

2.3 Ordered Set

Policy Based Data Structures (PBDS) from gcc compiler

Ordered Multiset can be created using `ordered_set<pll>val, idx`

`order_of_key()` can search for non-existent keys!

`find_by_order()` requires existent key and return the 0-idx position of the given value. Therefore, it returns the numbers of elements that are smaller than the given value;

ordered-set.cpp

```
Description: Set with index operators, implemented by gnu pbds. Remember to compile with gcc!!
Time: O(log(N)) but with slow constant
<bits/extc++.h>, <bits/extc++.h> 8578e5, 11 lines

// 0-idx
// find_by_order(i) -> iterator to elem with index i
// order_of_key(val) -> index of key

// Ordered Set
using namespace __gnu_pbds;
template <class T> using ordered_set = tree<T, null_type, less<
T>, rb_tree_tag, tree_order_statistics_node_update>;

// Ordered Map
using namespace __gnu_pbds;
template <class K, class V> using ordered_map = tree<K, V, less
<K>, rb_tree_tag, tree_order_statistics_node_update>;
```

2.3.1 Pyramid Array min-cost

You are given an array consisting of n integers. On each move, you can swap any two adjacent values. You want to transform the array into a pyramid array. This means that the final array has to be first increasing and then decreasing. It is also allowed that the final array is only increasing or decreasing. What is the minimum number of moves needed?

pyramid-array.cpp

Description: algorithm to find the min-cost of sorting an array in a pyramid order
Time: $\mathcal{O}(N\log(N))$, or $\mathcal{O}(N\log^2(N))$ if iterating the map directly

```
1651d7, 25 lines
int32_t main() { sws;
ll n; cin >> n;
map<ll, vll> freq;
for(ll i=0; i<n; i++) {
    ll val; cin >> val;
    freq[val].pb(i);
}
ordered_set<ll> os; // os with indexes of greater processed
// elements
ll ans = 0;
// iterate from greater values to lesser one.
// for each element,
// consider inserting it to the left of all greater
// elements
// or to the right of all greater elements
for(auto itr = freq.rbegin(); itr != freq.rend(); itr++) {
    auto [val, vec] = *itr;
    for(auto idx : vec) {
        ll pos = os.order_of_key({idx});
        ll left_cost = pos;
        ll right_cost = (ll)os.size() - pos;
        ans += min(left_cost, right_cost);
    }
    for(auto idx : vec) os.insert(idx);
}
cout << ans << endl;
}
```

2.4 Interval Set

interval-set.cpp

Description: A set that contains closed [l, r] interval which are disjoint (no intersection). This set is ordered and each interval [l1, r1] < [l2, r2] has r1 < l2. When a new interval is added, it checks which intersections will occur and rearranges the intervals.
Time: $\mathcal{O}(\log(N))$ per insertion, slow constant

```
a3c7e0, 29 lines
// keeps track of disjoint closed intervals [l, r]
// a new interval added may replace parts of an older one
struct IntervalSet {
    using T = array<ll, 3>;
    set<T> ranges;

    void add(T arr) {
        auto [l, r, k] = arr;

        while(ranges.upper_bound({r, INF, INF}) != ranges.begin()) {
            auto itr = prev(ranges.upper_bound({r, INF, INF}));
            auto [l2, r2, k2] = *itr;

            if (r2 < l) break;
            // guarantees that there is an intersection: l2 <= r
            // and r2 >= l
        }
    }
};
```

```

        ranges.erase(itr);

    if (l2 <= l-1) {
        ranges.insert({l2, l-1, k2});
    }

    if (r+1 <= r2) {
        ranges.insert({r+1, r2, k2});
    }

    ranges.insert({l, r, k});
}
};

```

2.5 Disjoint Set Union

There are two optional improvements:

- Tree Balancing
- Path Compression

If one improvement is used, the time complexity will become $O(\log N)$

If both are used, $O(\alpha) \approx O(5)$

dsu.cpp

Description: Disjoint Set Union with path compression and tree balancing
Time: $O(\alpha)$

424a7d, 22 lines

```

struct DSU{
    vector<ll> group, card;
    DSU (ll n){
        n += 1; // 0-idx -> 1-idx
        group = vector<ll>(n);
        iota(group.begin(), group.end(), 0);
        card = vll(n, 1);
    }
    ll find(ll i){
        return (i == group[i]) ? i : (group[i] = find(group[i]));
    }
    // returns false if a and b are already in the same
    // component
    bool join(ll a ,ll b){
        a = find(a);
        b = find(b);
        if (a == b) return false;
        if (card[a] < card[b]) swap(a, b);
        card[a] += card[b];
        group[b] = a;
        return true;
    }
};

```

2.6 Trie

Also called a **digital tree** or **prefix tree**.

trie.cpp

Description: Creates a trie by pre-allocating the trie array, which contains the indices for the child nodes. The trie can be easily modified to support alphanumeric strings instead of binary strings.

Time: $O(D)$, D = depth of trie

efeb7e, 40 lines

// MAX = maximum number of nodes that can be created

```

struct Trie{
    ll trie[MAX][26];

```

```

    bool isWordEnd[MAX];
    ll nxt = 1, wordsCnt = 0;

    void add(string s){ // O(Depth)
        ll node = 0;
        for(auto c: s) {
            if(trie[node][c-'a'] == 0) { // create new node
                trie[node][c-'a'] = nxt++;
            }
            node = trie[node][c-'a'];
        }
        if(!isWordEnd[node]){
            isWordEnd[node] = true;
            wordsCnt++;
        }
    }

    bool find(string s, bool remove=false){ // O(Depth)
        ll node = 0;
        for(auto c: s) {
            if(trie[node][c-'a'] == 0) {
                return false;
            }
            else {
                node = trie[node][c-'a'];
            }
        }

        if(remove and isWordEnd[node]){
            isWordEnd[node] = false;
            wordsCnt--;
        }

        return isWordEnd[node];
    }
};

```

2.7 Segment Trees

Each node of the segment tree represents the cumulative value of a range.

Observation: For some problems, such as range distinct values query, considerer offline approach, ordering the queries by L for example.

2.7.1 Recursive SegTree

seg-recursive-sum.cpp

Description: Basic Recursive Segment Tree for points increase and range sum query. When initializing, choose an appropriate value for n.

Time: $O(N \log N)$ to build, $O(\log N)$ to increase or query

156cd2, 71 lines

```

// [0, n] segtree for range sum query, point increase
// 0 or 1-idx
ll L=0, R;
struct Segtree {

```

```

    struct Node {
        // null element:
        ll ps = 0;
    };

```

```

    vector<Node> tree;
    vector<ll> v;

```

```

    Segtree(ll n) {
        R = n;
        v.assign(n+1, 0);
    }

```

```

        tree.assign(4*(n+1), Node{});
    }

    Node merge(Node a, Node b) {
        return Node {
            // merge operation:
            a.ps + b.ps
        };
    }

    void build(ll l=L, ll r=R, ll i=1 ) {
        if (l == r) {
            tree[i] = Node {
                // leaf element:
                v[l]
            };
        }
        else {
            ll mid = (l+r)/2;
            build(l, mid, 2*i);
            build(mid+1, r, 2*i+1);
            tree[i] = merge(tree[2*i], tree[2*i+1]);
        }
    }

    void increase(ll idx=1, ll val=0, ll l=L, ll r=R, ll i=1 )
    {
        if (l == r) {
            // increase operation:
            tree[i].ps += val;
        }
        else {
            ll mid = (l+r)/2;
            if (idx <= mid) increase(idx, val, l, mid, 2*i);
            else increase(idx, val, mid+1, r, 2*i+1);
            tree[i] = merge(tree[2*i], tree[2*i+1]);
        }
    }

    Node query(ll left=L, ll right=R, ll l=L, ll r=R, ll i=1) {
        // left/right are the range limits for the query
        // l / r are the internal variables of the tree
        if (right < l or r < left){
            // null element:
            return Node{};
        }
        else if (left <= l and r <= right) return tree[i];
        else{
            ll mid = (l+r)/2;
            return merge(
                query(left, right, l, mid, 2*i),
                query(left, right, mid+1, r, 2*i+1)
            );
        }
    }
};

```

seg-recursive-minmax.cpp

Description: Basic Recursive Segment Tree for point update, range min/-max query When initializing, choose an appropriate value for n.

Time: $O(N \log N)$ to build, $O(\log N)$ to update or query

fb9b46, 71 lines

```

// [0, n] segtree for point update, range min/max query
// 0 or 1-idx
ll L=0, R;
struct Segtree {

```

```

    struct Node {
        // null element:

```

```
ll mn = INF, mx = -INF;
};

vector<Node> tree;
vector<ll> v;

Segtree(ll n) {
R = n;
v.assign(n+1, 0);
tree.assign(4*(n+1), Node{});
}

Node merge(Node a, Node b) {
return Node {
// merge operation:
min(a.mn, b.mn),
max(a.mx, b.mx)
};
}

void build(ll l=L, ll r=R, ll i=1 ) {
if (l == r) {
tree[i] = Node {
// leaf element:
v[l],
v[l]
};
}
else {
ll mid = (l+r)/2;
build(l, mid, 2*i);
build(mid+1, r, 2*i+1);
tree[i] = merge(tree[2*i], tree[2*i+1]);
}
}

void update(ll idx=1, ll val=0, ll l=L, ll r=R, ll i=1 ) {
if (l == r) {
// increase operation:
tree[i].mn = tree[i].mx = val;
}
else {
ll mid = (l+r)/2;
if (idx <= mid) update(idx, val, l, mid, 2*i);
else update(idx, val, mid+1, r, 2*i+1);
tree[i] = merge(tree[2*i], tree[2*i+1]);
}
}

Node query(ll left=L, ll right=R, ll l=L, ll r=R, ll i=1) {
if (right < l or r < left){
// null element:
return Node{};
}
else if (left <= l and r <= right) return tree[i];
else{
ll mid = (l+r)/2;
return merge(
query(left, right, l, mid, 2*i),
query(left, right, mid+1, r, 2*i+1)
);
}
}
};
```

2.7.2 Inverted Segtree

Instead of keeping the prefix sum for all the children in each node, store only the delta encoding value.

Therefore, to check a value in a certain position, iterate and sum all delta values from root to leaf.

seg-inverted.cpp

Description: Basic Inverted Segment Tree for point query stored value, range increase When initializing, choose an appropriate value for n.

Time: $\mathcal{O}(N \log N)$ to build, $\mathcal{O}(\log N)$ to range increase or point query

```
// [0, n] segtree for point query stored value, range increase
// 0 or 1-idx
ll L=0, R;
struct Segtree {

struct Node {
// null element:
ll ps = 0;
};

vector<Node> tree;
vector<ll> v;

Segtree(ll n) {
R = n;
v.assign(n+1, 0);
tree.assign(4*(n+1), Node{});
}

Node merge(Node a, Node b) {
return Node {
// merge operation:
a.ps + b.ps
};
}

void build(ll l=L, ll r=R, ll i=1 ) {
if (l == r) {
tree[i] = Node {
// leaf element:
v[l]
};
}
else {
ll mid = (l+r)/2;
build(l, mid, 2*i);
build(mid+1, r, 2*i+1);
tree[i] = Node{};
}
}

void increase(ll left, ll right, ll val=0, ll l=L, ll r=R, ll i=1 ) {
if (right < l or r < left) {
return;
}
else if (left <= l and r <= right) {
// increase operation
tree[i].ps += val;
}
else {
ll mid = (l+r)/2;
increase(left, right, val, l, mid, 2*i);
increase(left, right, val, mid+1, r, 2*i+1);
}
}

Node query(ll idx, ll l=L, ll r=R, ll i=1) {
if (l == r) {
return tree[i];
}
}
```

```
else {
ll mid = (l+r)/2;
if (idx <= mid)
return merge(tree[i], query(idx, l, mid, 2*i));
else
return merge(tree[i], query(idx, mid+1, r, 2*i+1));
}
};
```

2.7.3 PA Segtree

seg-pa.cpp

Description: Seg with PA (Progressao Aritmetica / Arithmetic Progression) When initializing the segmente tree, remeber to choose the range limits (L, R) and call build()

Time: $\mathcal{O}(N \log N)$ to build, $\mathcal{O}(\log N)$ to increase or query

```
// [0, n] segtree for range sum query, point increase
ll L=0, R;
struct SegtreePA {

struct Node {
// null element:
ll ps = 0;
};

vector<Node> tree;
vector<ll> v;
vector<pll> lazy; // {x, y} of {x*i + y}
// x = razao da PA, y = constante

SegtreePA(ll n) {
R = n;
v.assign(n+1, 0);
tree.assign(4*(n+1), Node{});
lazy.assign(4*(n+1), pll());
}

Node merge(Node a, Node b) {
return Node {
// merge operaton:
a.ps + b.ps
};
}

inline pll sum(pll a, pll b) {
return {a.ff+b.ff, a.ss+b.ss};
}

void build(ll l=L, ll r=R, ll i=1) {
if (l == r) {
tree[i] = Node {
// leaf element:
v[l]
};
}
else {
ll mid = (l+r)/2;
build(l, mid, 2*i);
build(mid+1, r, 2*i+1);
tree[i] = merge(tree[2*i], tree[2*i+1]);
}
lazy[i] = {0, 0};
}

void prop(ll l=L, ll r=R, ll i=1) {
auto [x, y] = lazy[i];
if (x == 0 and y == 0) return;
}
```

```

11 len = r-l+1;

// (l_val + r_val) * len / 2
Node val{ ((y + y + x*(len-1))*len) / 2 };
tree[i] = merge(tree[i], val);

if (l != r) {
    11 mid = (l+r)/2;
    lazy[2*i] = sum(lazy[2*i], lazy[i]);
    lazy[2*i+1] = sum(lazy[2*i+1], {x, y + x*(mid-l+1)});
}

lazy[i] = {0, 0};
}

// left/right are the range limits for the query
// l / r are the internal variables of the tree
void increase(11 left, 11 right, 11 x, 11 y, 11 l=L, 11 r=R,
, 11 i=1 ) {
    prop(1, r, i);
    if (right < l or r < left) return;
    else if (left <= l and r <= right) {
        lazy[i] = {x, y};
        prop(1, r, i);
    }
    else{
        11 mid = (l+r)/2;
        increase(left, right, x, y, 1, mid, 2*i);
        11 ny = y + max( x*( mid-max(left, l) + 1), 0LL);
        increase(left, right, x, ny, mid+1, r, 2*i+1);
        tree[i] = merge(tree[2*i], tree[2*i+1]);
    }
}

Node query(11 left=L, 11 right=R, 11 l=L, 11 r=R, 11 i=1) {
    prop(1, r, i);
    if (right < l or r < left) {
        // null element:
        return Node{};
    }
    else if (left <= l and r <= right) return tree[i];
    else{
        11 mid = (l+r)/2;
        return merge(
            query(left, right, l, mid, 2*i),
            query(left, right, mid+1, r, 2*i+1)
        );
    }
}
};

```

Dynamic Programming (3)

3.1 Divide-Conquer Optimization

Some dynamic programming problems have a recurrence of this form:

$$dp(i, j) = \min_{1 \leq k \leq j} dp(i-1, k-1) + C(k, j)$$

where $C(k, j)$ is a cost function and $dp(i, j) = 0$ when $j \leq 0$ (using 1-idx).

Say $0 \leq i < m$ and $1 \leq j \leq n$, and evaluating C takes $O(1)$ time. Then the straightforward evaluation of the above recurrence is $O(mn^2)$. There are $m \times n$ states, and n transitions for each state.

Let $opt(i, j)$ be the value of k that minimizes the above expression. Assuming that the cost function satisfies the quadrangle inequality, we can show that $opt(i, j-1) \leq opt(i, j)$ for all i, j . This is known as the monotonicity condition. Then, we can apply divide and conquer DP. The optimal "splitting point" for a fixed i increases as j increases.

This lets us solve for all states more efficiently. Say we compute $opt(i, j)$ for some fixed i and j . Then for any $j' < j$ we know that $opt(i, j') \leq opt(i, j)$. This means when computing $opt(i, j')$, we don't have to consider as many splitting points!

To minimize the runtime, we apply the idea behind divide and conquer. First, compute $opt(i, n/2)$. Then, compute $opt(i, n/4)$, knowing that it is less than or equal to $opt(i, n/2)$; and $opt(i, 3n/4)$ knowing that it is greater than or equal to $opt(i, n/2)$.

By recursively keeping track of the lower and upper bounds on opt , we reach a $O(n \log n)$ runtime per i . Each possible value of $opt(i, j)$ only appears in $\log n$ different nodes.

divide-conquer-dp.cpp

Description: Optimize an $O(mn^2)$ dp to $O(mn \log(n))$ using divide and conquer. cost function must have quadrangle inequality ("wider is worse")
Time: $O(mn \log(n))$

a2746c, 48 lines

```

// m partitions, n elements
11 divideConquerDP(11 m, vector<11> &vec) {
    // vec indexed with 1-idx, vec[0] = 0
    11 n = vec.size() - 1;

    vector<11> ps(n+1, 0);
    for(11 i=1; i<=n; i++) {
        ps[i] = ps[i-1] + vec[i];
    }
    auto cost = [&](11 l, 11 r) {
        11 sum = ps[r] - ps[l-1];
        return sum * sum;
    };

    vector<11> cur(n+1, 0), nxt(n+1);

    // O(n log(n))
    function<void(11, 11, 11, 11)> compute = [&](11 l, 11 r, 11
        optl, 11 optr) {
        if (r < l) return;

        11 mid = (l+r)/2;

        11 best = INF;
        11 opt = -1;
        for(11 k=optl; k<=min(mid, optr); k++) {
            11 val = cur[k-1] + cost(k, mid);
            if (val < best) {
                best = val;
                opt = k;
            }
        }
    };
}

```

```

}
nxt[mid] = best;

compute(l, mid-1, optl, opt);
compute(mid+1, r, opt, optr);
};

for(11 i=1; i<=n; i++) // 1 partition
    cur[i] = cost(1, i);

for(11 i=1; i<=m; i++) { // m partitions
    nxt[0] = 0;
    compute(1, n, 1, n);
    swap(cur, nxt);
}

return cur[n];
}

```

3.2 Knuth Optimization

Knuth's optimization, also known as the Knuth-Yao Speedup, is a special case of dynamic programming on ranges, that can optimize the time complexity of solutions by a linear factor, from $O(n^3)$ for standard range DP to $O(n^2)$.

3.2.1 Conditions

The Speedup is applied for transitions of the form:

$$dp(i, j) = \min_{i \leq k < j} [dp(i, k) + dp(k+1, j) + C(i, j)].$$

Similar to divide and conquer DP, let $opt(i, j)$ be the value of k that minimizes the expression in the transition (opt is referred to as the "optimal splitting point" further in this article). The optimization requires that the following holds:

$$opt(i, j-1) \leq opt(i, j) \leq opt(i+1, j).$$

We can show that it is true when the cost function C satisfies the following conditions for $a \leq b \leq c \leq d$:

$$C(b, c) \leq C(a, d);$$

$$C(a, c) + C(b, d) \leq C(a, d) + C(b, c) \text{ (the quadrangle inequality [QI])}.$$

A common cost function that satisfies the above condition is the **sum of the values in a subarray**.

knuth.cpp

Description: Optimize $O(n^3)$ to $O(n^2)$ dp with transitions of finding a optimal division point k for $[l, r]$.

Time: $O(n^2)$

8863a7, 37 lines

```

// dp[l][r] (inclusive) -> min cost
// opt[l][r] (inclusive) -> optimal spliting point k in l<=k<=r
11 dp[MAX][MAX], opt[MAX][MAX];

11 knuth(vector<11> &vec) {
    // vec indexed with 1-idx, vec[0] = 0
    11 n = vec.size() - 1;
}

```



```
vector<ll> ps(n+1, 0);
for(ll i=1; i<=n; i++) {
    ps[i] = ps[i-1] + vec[i];
}
auto C = [&](ll l, ll r) {
    return ps[r] - ps[l-1];
};

for(ll i=1; i<=n; i++) {
    opt[i][i] = i;
}

for(ll l=n-1; l>=1; l--) {
    for(ll r=l+1; r<=n; r++) {
        ll mn = INF;
        ll cost = C(l, r);
        for(ll k=opt[l][r-1]; k<=min(r-1, opt[l+1][r]); k++) {
            ll aux = dp[l][k] + dp[k+1][r] + cost;
            if (aux <= mn) {
                mn = aux;
                opt[l][r] = k;
            }
        }
        dp[l][r] = mn;
    }
}

return dp[1][n];
}
```

3.3 Slope Optimizations

3.3.1 Convex Hull Trick

If multiple transitions of the DP can be seen as first degree polynomials (lines). CHT can be used to optimized it

Some valid functions:

$ax + b$

$cx^2 + ax + b$ (ignore cx^2 if c is independent)

cht-dynamic.cpp

Description: Dynamic version of CHT, thefore, one can insert lines in any order. There is no line removal operator
Time: $\mathcal{O}(\log N)$ per query and per insertion

```
707da4, 51 lines
// Convex Hull Trick Dinamico
//
// Para float, use LLINF = 1/.0, div(a, b) = a/b
//
// update(x) atualiza o ponto de intersecao da reta x
// overlap(x) verifica se a reta x sobrepoe a proxima
// add(a, b) adiciona reta da forma ax + b
// query(x) computa maximo de ax + b para entre as retas
// se quiser computar o minimo, eh soh fazer (-a)x + (-b)
//
// O(log(n)) amortizado por insercao
// O(log(n)) por query

struct Line {
    mutable ll a, b, p;
    bool operator<(const Line& o) const { return a < o.a; }
    bool operator<(ll x) const { return p < x; }
};

struct DynamicCHT : multiset<Line, less<>> {
```

```
ll div(ll a, ll b) {
    return a / b - ((a ^ b) < 0 and a % b);
}

void update(iterator x) {
    if (next(x) == end()) x->p = LLINF;
    else if (x->a == next(x)->a) x->p = x->b >= next(x)->b ?
        LLINF : -LLINF;
    else x->p = div(next(x)->b - x->b, x->a - next(x)->a);
}

bool overlap(iterator x) {
    update(x);
    if (next(x) == end()) return 0;
    if (x->a == next(x)->a) return x->b >= next(x)->b;
    return x->p >= next(x)->p;
}

void add(ll a, ll b) {
    auto x = insert({a, b, 0});
    while (overlap(x)) erase(next(x)), update(x);
    if (x != begin() and !overlap(prev(x))) x = prev(x), update
        (x);
    while (x != begin() and overlap(prev(x)))
        x = prev(x), erase(next(x)), update(x);
}

ll query(ll x) {
    assert(!empty());
    auto l = *lower_bound(x);
    return l->a * x + l->b;
}
```

3.3.2 Li-chao Tree

Works for any type of function that has the **transcending property**:

Given two functions $f(x), g(x)$ of that type, if $f(t)$ is greater than/smaller than $g(t)$ for some $x=t$, then $f(x)$ will be greater than/smaller than $g(x)$ for $x \geq t$. In other words, once $f(x)$ “win/lose” $g(x)$, $f(x)$ will continue to “win/lose” $g(x)$.

3.3.3 Slope Trick

You are given an array of n integers. You want to modify the array so that it is non-decreasing, i.e., every element is at least as large as the previous element. On each move, you can increase or decrease the value of any element by one. What is the minimum number of moves required?

Observation: It is also possible to solve the problem of modifying the array to stricly increasing.

slope-trick.cpp

Description: Using Slope trick, compute the min cost to modify arry to be non-decreasing
Time: $\mathcal{O}(n \log(n))$

```
25b6fc, 58 lines
// funcao f_i(x) = custo de deixar todo mundo ate i
// nao decrescente e <= x

// os pontos em changepoints sao os pontos da
// piecewise linear function convexa
```

```
// eu calculo g_i(x) = custo de deixar todo mundo ate i
// nao decrescente e v[i] == x

// entao f_i(x) = min(g_i(t) pra t <= x)

// podemos escrever g_i(x) = f_{i-1}(x) + |x-v[i]|
// entao a gente ta somando as funcoes e gerando outra convexa

// a resposta vai armazenar o custo (coord y) do opt
// e o topo do change-points vai ser o opt atual

// se opt < v[i] entao a gente calcula o g_i e o novo opt
// vai ser v[i]

// se opt > v[i] entao o slope entre opt e anterior opt vai
ficar reto
// (este anterior opt podendo ser o v[i] que vai ser inserido),
// entao basta retirar o ultimo opt e teremos de novo a
resposta
// neste caso devemos aumentar o custo do opt, que vai ser por
// (opt - v[i]) (so olhar a funcao em V do || e a convexa do f_{i-1})

// o v[i] vai ser inserido varias vezes no change-points
// pra denotar a inclinacao no slope dele

int32_t main() { sws;

    ll n; cin >> n;

    vector<ll> v(n);
    for(ll i = 0; i < n; i++) {
        cin >> v[i];
        // to change the problem
        // from increasing to non-decreasing
        // v[i] -= i;
    }

    priority_queue<ll> change_points;
    change_points.push(-INF);
    ll ans = 0;

    for(ll i = 0; i < n; i++) {
        ll opt = change_points.top();
        change_points.push(v[i]);

        if(opt > v[i]) {
            ans += opt - v[i];
            change_points.push(v[i]);
            change_points.pop();
        }

        cout << ans << endl;
    }
}
```

3.4 SOS DP

Sum over Subsets DP (SOS DP) computes how many elements there are for each mask which are a subset of this mask.


This can be modified for other operations in which the subset contributes for the mask . *Example:*

1001 if a subset of **1101**;

0001 if a subset of 1101;

1100 if a subset of 1101;

1101 if a subset of 1101;

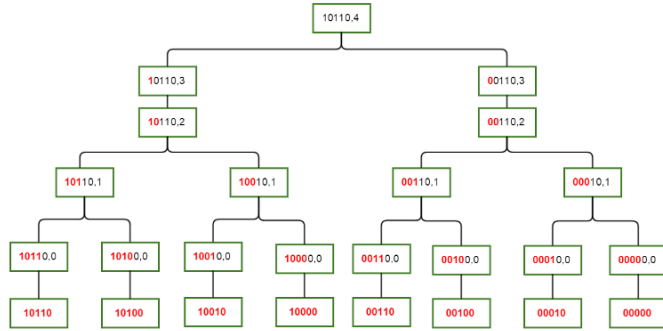

sos-dp.cpp

Description: Efficiently compute a bitmask dp, in which a subset of this bitmask contributes for the value of this bitmask.

Time: $\mathcal{O}(2^N N)$, N = number of bits

19e50a, 35 lines

```
// problem: Given a list of n integers, your task is to
// calculate for each element x:
// the number of elements y such that x | y = x
// the number of elements y such that x & y = x
// the number of elements y such that x & y != 0
```

```
const ll LOGMAX = 20;
ll dp[1 << LOGMAX];
ll dp2[1 << LOGMAX];

int32_t main(){ sws;
    ll n; cin >> n;

    vector<ll> a(n);
    for(auto &val : a) cin >> val;

    ll full = (1LL << LOGMAX) - 1;

    for(auto val : a) dp2[full^val] += 1;
    for(auto val : a) dp[val] += 1;

    for(ll b=0; b<LOGMAX; b++) {
        for(ll mask=0; mask<(1LL<<LOGMAX); mask++) {
            if (mask & (1LL << b)) {
                dp[mask] += dp[mask ^ (1LL << b)];
                dp2[mask] += dp2[mask ^ (1LL << b)];
            }
        }
    }

    for(auto val : a) {
        cout << dp[val] << " ";
        cout << dp2[full ^ val] << " ";
        cout << n - dp[full^val] << endl;
    }
}
```

Game theory (4)

4.1 Classic Game

- There are n piles (heaps), each one with x_i stones.
- Each turn, a players must remove t stones (non-zero) from a pile, turning x_i into y_i .
- The game ends when it's impossible to make any more moves and the player without moves left lose.

4.2 Bouton's Theorem

Let s be the xor-sum value of all the piles sizes, a state $s = 0$ is a losing position and a state $s! = 0$ is a winning position

4.2.1 Proof

All winning positions will have at least one valid move to turn the game into a losing position.

All losing positions will only have moves that turns the game into winning positions (except the base case when there are no piles left and the player already lost)

4.3 DAG Representation

Consider all game positions or states of the game as **Vertices** of a graph

Valid moves are the transition between states, therefore, the directed **Edges** of the graph

If a state has no outgoing edges, it's a dead end and a losing state (degenerated state).

If a state has only edges to winning states, therefore it is a losing state.

if a state has at least one edge that is a losing state, it is a winning state.

4.4 Sprague-Grundy Theorem

Let's consider a state u of a two-player impartial game and let v_i be the states reachable from it.

To this state, we can assign a fully equivalent game of Nim with one pile of size x . The number x is called the **Grundy value** or **nim-value** of the state u .

If **all transitions** lead to a *winning state*, the current state must be a *losing state* with number 0.

If **at least one transition** lead to a *losing state*, the current state must be a *winning state* with number $\neq 0$.

The **MEX** operator satisfies both condition above and can be used to calculate the nim-value of a state:

$number_u = \text{MEX of all } number_{v_i}$

Viewing the game as a DAG, we can gradually calculate the Grundy values starting from vertices without outgoing edges (number=0).

Note that the MEX operator **guarantees** that all nim-values smaller than the considered number can be reached, which is essentially the nim game with a single heap with pile size = number.

There are only two operations that are used when considering a Sprague-Grundy game:

4.4.1 Composition

XOR operator to compose sub-games into a single composite game

When a game is played with multiple sub-games (as nim is played with multiple piles), you are actually choosing one sub-game and making a valid move there (choosing a pile and subtracting a value from it).

The final result/winner will depend on all the sub-games played. Because you need to play all games.

To compute the final result, one can simply consider the XOR of the numbers of all sub-games.

4.4.2 Decomposition

MEX operator to compute the number of a state that has multiple transitions to other states

A state with number x can be transitioned (decomposed) into all states with number $y < x$

Nevertheless a state may reach several states, only a single one will be used during the game. This shows the difference between **states** and **sub-games**: All sub-games must be played by the players, but the states of a sub-game may be ignored.

To compute the mex of a set efficiently:

mex.cpp

Description: Compute MEX efficiently by keeping track of the frequency of all existent elements and also the missing ones

Time: $\mathcal{O}(\log N)$ per addition/removal, $\mathcal{O}(1)$ to get mex value, $\mathcal{O}(N \log(N))$ to initialize

d6f2b9, 27 lines

```
struct MEX {
    map<ll, ll> freq;
    set<ll> missing;

    // initialize set with values up to {max_valid_value}
    inclusive
    MEX(ll max_valid_value) { // O(n log(n))
        for(ll i=0; i<=max_valid_value; i++)
            missing.insert(i);
    }

    ll get() { // O(1)
        if (missing.empty()) return 0;
        return *missing.begin();
    }
}
```



```
void remove(ll val) { // O(log(n))
    freq[val]--;
    if (freq[val] == 0)
        missing.insert(val);
}

void add(ll val) { // O(log(n))
    freq[val]++;
    if (missing.count(val))
        missing.erase(val);
}
};
```

4.5 Variations and Extensions

4.5.1 Nim with Increases

Consider a modification of the classical nim game: a player can now add stones to a chosen pile instead of removing.

Note that this extra rule needs to have a restriction to keep the game acyclic (finite game).

Lemma: This move is not used in a winnig strategy and can be ignored.

Proof: If a player adds t stones in a pile, the next player just needs to remove t stones from this pile.

Considering that the game is finite and this ends sooner or later.

Example: If the set of possible outcomes for a state is 0, 1, 2, 7, 8, 9. The nimber is 3, because the MEX is 3, which is the smallest nim-value you can't transition into and also you can transition to all smaller nim-values.

Note that 7, 8, 9 transitions can be ignored, because you can simply revert the play by subtracting the same amount.

4.6 Misère Game

In this version, the player who takes the last object loses. To consider this version, simply swap the winning and losing player of the normal version.

4.7 Staircase Nim

4.7.1 Description

In Staircase Nim, there is a staircase with n steps, indexed from 0 to $n-1$. In each step, there are zero or more coins. Two players play in turns. In his/her move, a player can choose a step ($i > 0$) and move one or more coins to step below it ($i-1$). The player who is unable to make a move lose the game. That means the game ends when all the coins are in step 0.

4.7.2 Strategy

We can divide the steps into two types, odd steps, and even steps.

Now let's think what will happen if a player A move x coins from an even step(non-zero) to an odd step. Player B can always move these same x coins to another even position and **the state of odd positions aren't affected**

But if player A moves a coin from an odd step to an even step, similar logic won't work. Due to the degenerated case, there is a situation when x coins are moved from stair 1 to 0, and player B can't move these coins from stair 0 to -1 (not a valid move).

From this argument, we can agree that coins in even steps are useless, they don't interfere to decide if a game state is winning or losing.

Therefore, the staircase nim can be visualized as a simple nim game with only the odd steps.

When stones are sent from an odd step to an even step, it is the same as removing stones from a pile in a classic nim game.

And when stones are sent from even steps to odd ones, it is the same as the increasing variation described before.

4.8 Grundy's Game

Initially there is only one pile with x stones. Each turn, a player must divide a pile into two non-zero piles with different sizes. The player who can't do any more moves loses.

4.8.1 Degenerate (Base) States

$x = 1$ (nim-val = 0) (losing)

$x = 2$ (nim-val = 0) (losing)

4.8.2 Other States

nim-val = MEX (all transitions)

Examples

x = 3:

```
{2, 1} -> {0} xor {0} -> 0
nim-val = MEX({0}) = 1
```

x = 4:

```
{3, 1} -> {1} xor {0} -> 1
nim-val = MEX({1}) = 0
```

x = 5:

```
{4, 1} -> {0} xor {0} -> 0
{3, 2} -> {1} xor {0} -> 1
nim-val = MEX({0, 1}) = 2
```

x = 6:

```
{5, 1} -> {2} xor {0} -> 2
{4, 2} -> {0} xor {0} -> 0
```

```
nim-val = MEX({0, 2}) = 1
```

Important observation: All numbers for ($n \geq 2000$) are non-zero. (missing proof here and testing for values above $1e6$).

4.9 Insta-Winning States

Classic nim game: if **all** piles become 0, you lose. (no more moves)

Modified nim game: if **any** pile becomes 0, you lose.

To adapt to this version of nim game, we create insta-winning states, which represents states that have a transition to any empty pile (will instantly win). Insta-winning states must have an specific number so they don't conflict with other nimbers when computing. A possible solution is nimber=INF, because no other nimber will be high enough to cause conflict.

Because of this adaptation, we can now ignore states with empty piles, and consider them with (*nullvalue* = -1). And the (*number* = 0) now represents the states that only have transitions to insta-winning states.

After this, beside winning states and losing states, we have added two new categories of states (insta-winning and empty-pile). Notice that:

```
empty-pile <- insta-winning <- number(0)
```

Therefore, we have returned to the classical nim game and can proceed normally.

OBS: *Empty piles* (wasn't empty before) (*number* = -1) is different from *Non-existent piles* (never existed) (number = 0)

Usage Example:
<https://codeforces.com/gym/101908/problem/B>

4.10 References

https://cp-algorithms.com/game_theory/sprague-grundy-nim.html

<https://codeforces.com/blog/entry/66040>

<https://brilliant.org/wiki/nim/>

Geometry (5)

5.1 Point Struct

```
point.cpp
Description: Point struct for point operations, supports floating points and integers
Time:  $\mathcal{O}(1)$ 
Te1lab, 43 lines

const ld EPS = 1e-9;

// T can be int, long long, float, double, long double
```

```
template<class T> bool eq(T a, T b) {
    if (is_integral<T>::value) return a == b;
    else return abs(a-b) <= EPS;
}

template<class T> struct P {
    T x, y;
    ll id; // (optional)

    P(T xx=0, T yy=0): x(xx), y(yy) {}

    P operator +(P const& o) const { return { x+o.x, y+o.y }; }
    P operator -(P const& o) const { return { x-o.x, y-o.y }; }
    P operator *(T const& t) const { return { x*t, y*t }; }
    P operator /(T const& t) const { return { x/t, y/t }; }
    T operator *(P const& o) const { return x*o.x + y*o.y; }
    T operator ^(P const& o) const { return x*o.y - y*o.x; }

    bool operator <(P const& o) const { // enables sorting, set
        , etc
        return (eq(x, o.x) ? y < o.y : x < o.x);
    }

    bool operator ==(P const& o) const {
        return eq(x, o.x) and eq(y, o.y);
    }

    bool operator !=(P const& o) const {
        return !(*this == o);
    }

    friend istream& operator >>(istream& in, P &p) {
        return in >> p.x >> p.y;
    }

    friend ostream& operator <<(ostream& out, P const& p) {
        return out << p.x << ' ' << p.y;
    }
};
using point = P<ll>;
// using point = P<ld>;
```

5.2 Line Struct

line.cpp

Description: Line struct for line operations

Time: $\mathcal{O}(1)$

5f33bd, 29 lines

```
template<class T> struct L {
    point p1, p2;
    T a, b, c; // ax+by+c = 0;

    // y-y1 = ((y2-y1)/(x2-x1))(x-x1)
    L(point pp1=0, point pp2=0) : p1(pp1), p2(pp2) {
        a = p1.y - p2.y;
        b = p2.x - p1.x;
        c = p1 ^ p2;
    }

    T eval(point p) {
        return a*p.x + b*p.y + c;
    }

    bool inside(point p) { // reta
        return eq(eval(p), T(0));
    }

    point normal() {
        return point(a, b);
    }
}
```

```
bool insideSeg(point p) { // segmento [p1, p2]
    return ( ((p1-p) ^ (p2-p)) == 0 and ((p1-p) * (p2-p))
        <= 0 );
}
};
using line = L<ll>;
// using line = L<ld>;
```

5.3 Manhattan Minimum Spanning Tree

Also called the rectilinear or L1 Minimum Spanning Tree problem.

manhattanMST.cpp

Description: Given N points, returns up to 4*N edges, which are guaranteed to contain a minimum spanning tree for the graph with edge weights $w(p, q) = -p.x - q.x - + -p.y - q.y-$. Edges are in the form (distance, src, dst). Use a standard MST algorithm on the result to find the final MST.

Time: $\mathcal{O}(N \log N)$

00e093, 25 lines

```
// requires point struct, at least the constructor and operator -

vector<array<ll, 3>> manhattanMST(vector<point> ps) {
    vector<ll> id(size(ps));
    iota(id.begin(), id.end(), 0);
    vector<array<ll, 3>> edges;
    for(ll k=0; k<4; k++) {
        sort(id.begin(), id.end(), [&](ll i, ll j) {
            return (ps[i]-ps[j]).x < (ps[j]-ps[i]).y;
        });

        map<ll, ll> sweep;
        for (ll i : id) {
            for (auto it = sweep.lower_bound(-ps[i].y); it !=
                sweep.end(); sweep.erase(it++)) {
                ll j = it->ss;
                point d = ps[i] - ps[j];
                if (d.y > d.x) break;
                edges.pb({d.y + d.x, i, j});
            }
            sweep[-ps[i].y] = i;
        }
        for (point& p : ps) if (k & 1) p.x = -p.x; else swap(p.x, p.y);
    }
    return edges;
}
```

Graph (6)

6.1 Fundamentals

dfs.cpp

Description: Simple DFS template for anonymous function

Time: $\mathcal{O}(V + E)$

af867f, 19 lines

```
int32_t main(){ sws;
    // compute cardinality of each subtree
    vector<vll> g(n);
    vector<ll> card(n);
    vector<bool> vis(n); // redundant here

    function<ll (ll, ll)> dfs = [&](ll u, ll p) -> ll {
        if (vis[u]) return;
        vis[u] = 1;
```

```
        card[u] += 1;
        for(auto v : g[u]) if (v != p) {
            card[u] += dfs(v, u);
        }
        return card[u];
    };

    dfs(1, -1);
}
```

bfs.cpp

Description: Simple BFS template

Time: $\mathcal{O}(V + E)$

7bed46, 34 lines

```
vector<vll> g(n);
vector<ll> d(n);
vector<bool> vis(n);

void bfs(ll src, ll sink) {

    queue<ll> q;
    q.push(src);
    d[src] = 0;
    vis[src] = 1;

    while(!q.empty()) {
        auto u = q.front(); q.pop();

        // add here a special break condition if needed, ex:
        if (u == sink) break;

        for(auto v : g[u]) {

            // each v is added to queue only once
            // due to checking visited inside for(auto v : g[u]
            ])
            // and setting vis[v] = 1 before pushing to queue
            if (!vis[v]) {
                vis[v] = 1;
                d[v] = d[u] + 1;
                q.push(v);
            }

            else { // already added to queue, but there may be
                a shorter path
                d[v] = min(d[v], d[u] + 1);
            }
        }
    }
}
```

6.2 Network flow

In optimization theory, maximum flow problems involve finding a feasible flow through a flow network that obtains the maximum possible flow rate.

dinic.cpp

Description: Run several bfs to compute the residual graph until a max flow configuration is discovered

Time: General Case, $\mathcal{O}(V^2E)$; Unit Capacity, $\mathcal{O}\left((V + E)\sqrt{E}\right)$; Bipartite and unit capacity, $\mathcal{O}\left((V + E)\sqrt{V}\right)$

dea1b7, 86 lines

```
// remember to duplicate vertices for the bipartite graph
// N = number of nodes, including sink and source
const ll N = 700;
```

```

struct Dinic {
    struct Edge {
        ll from, to, flow, cap;
    };
    vector<Edge> edges;

    vector<ll> g[N];
    ll ne = 0, lvl[N], vis[N], pass;
    ll qu[N], px[N], qt;

    ll run(ll s, ll sink, ll minE) {
        if (s == sink) return minE;
        ll ans = 0;
        for (; px[s] < (int)g[s].size(); px[s]++){
            ll e = g[s][px[s]];
            auto &v = edges[e], &rev = edges[e^1];
            if (lvl[v.to] != lvl[s]+1 || v.flow >= v.cap)
                continue;
            ll tmp = run(v.to, sink, min(minE, v.cap - v.flow));
            v.flow += tmp, rev.flow -= tmp;
            ans += tmp, minE -= tmp;
            if (minE == 0) break;
        }
        return ans;
    }

    bool bfs(ll source, ll sink) {
        qt = 0;
        qu[qt++] = source;
        lvl[source] = 1;
        vis[source] = ++pass;
        for (ll i=0; i<qt; i++) {
            ll u = qu[i];
            px[u] = 0;
            if (u == sink) return 1;
            for (auto& ed : g[u]) {
                auto v = edges[ed];
                if (v.flow >= v.cap || vis[v.to] == pass)
                    continue;
                vis[v.to] = pass;
                lvl[v.to] = lvl[u]+1;
                qu[qt++] = v.to;
            }
        }
        return false;
    }

    ll flow(ll source, ll sink) { // max_flow
        reset_flow();
        ll ans = 0;
        while (bfs(source, sink))
            ans += run(source, sink, LLINF);
        return ans;
    }

    void addEdge(ll u, ll v, ll c, ll rc = 0) { // c = capacity
        , rc = retro-capacity;
        Edge e = {u, v, 0, c};
        edges.pb(e);
        g[u].pb(ne++);
        e = {v, u, 0, rc};
        edges.pb(e);
        g[v].pb(ne++);
    }

    void reset_flow() {
        for (ll i=0; i<ne; i++) edges[i].flow = 0;
        memset(lvl, 0, sizeof(lvl));
    }
}

```

```

memset(vis, 0, sizeof(vis));
memset(qu, 0, sizeof(qu));
memset(px, 0, sizeof(px));
qt = 0; pass = 0;

// cut set cost = minimum cost = max flow
// cut set is the set of edges that, if removed,
// will disrupt flow from source to sink and make it 0.
vector<pll> cut() {
    vector<pll> cuts;
    for (auto [from, to, flow, cap]: edges)
        if (flow == cap and vis[from] == pass and vis[to] <
            pass and cap > 0)
            cuts.pb({from, to});
    return cuts;
}

};

dinitz.cpp
Description: This second version may be slower due to dynamic allocation,
queue, etc but it's more readable, more memory efficient
Time: General Case,  $\mathcal{O}(V^2E)$ ; Unit Capacity,  $\mathcal{O}((V+E)\sqrt{E})$ ; Bipartite
and unit capacity,  $\mathcal{O}((V+E)\sqrt{V})$ 
49775d, 88 lines

```

```

struct Dinitz {
    struct Edge { // u -> v
        ll u, v, cap, flow=0; // u is redundant, but nice for
        some problems
    };

    vector<Edge> edges;
    vector<vector<ll>> g;
    vector<ll> level, ptr;

    // n need to be big enough for all nodes, including src/
    sink
    ll n, src, sink;
    Dinitz(ll nn, ll s = -1, ll t = -1) : n(nn+10) {
        src = (s == -1 ? n-2 : s);
        sink = (t == -1 ? n-1 : t);
        g.resize(n);
    }

    void addEdge(ll u, ll v, ll cap, ll rcap = 0) { // rcap =
        retrocapacity for bidirectional edges
        g[u].push_back( (ll)edges.size() );
        edges.push_back({u, v, cap});
        g[v].push_back( (ll)edges.size() );
        edges.push_back({v, u, rcap});
    }

    bool bfs() {
        level.assign(n, -1); // not vis
        level[src] = 0;
        queue<ll> q;
        q.push(src);
        while (!q.empty()) {
            ll u = q.front(); q.pop();
            for (auto eid : g[u]) {
                auto e = edges[eid];
                if (e.flow >= e.cap or level[e.v] != -1)
                    continue;
                level[e.v] = level[u] + 1;
                q.push(e.v);
            }
        }
        return level[sink] != -1;
    }
}

```

```

}

ll dfs(ll u, ll f) {
    if (f == 0 or u == sink) return f;
    for (ll &i = ptr[u]; i < (ll)g[u].size(); i++) {
        ll eid = g[u][i];
        auto &e = edges[eid];
        if (e.flow >= e.cap or level[u]+1 != level[e.v])
            continue;
        ll newf = dfs(e.v, min(f, e.cap - e.flow));
        if (newf == 0) continue;
        e.flow += newf;
        edges[eid^1].flow -= newf;
        return newf;
    }
    return 0;
}

ll max_flow = 0;
ll flow(bool reset_flow = true) {
    if (reset_flow) {
        max_flow = 0;
        for (ll u=0; u<n; u++) {
            for (auto eid : g[u]) {
                auto &e = edges[eid];
                e.flow = 0;
            }
        }
    }
    while (bfs()) {
        ptr.assign(n, 0);
        while (ll newf = dfs(src, INF))
            max_flow += newf;
    }
    return max_flow;
}

// minimum cut set cost = minimum cost = max flow
// minimum cut set is the minimum set of edges that, if
// removed,
// will disrupt flow from source to sink and make it 0.
vector<pll> cut() {
    vector<pll> cuts;
    for (auto [u, v, cap, flow]: edges) {
        if (level[u] != -1 and level[v] == -1) {
            cuts.pb({u, v});
        }
    }
    return cuts;
}
};

```

6.2.1 Matching with Flow

By modeling a bipartite graph, with some Vertices (that will choose a match) to be on the L graph and some Vertices (that will be chosen) on the R. Set the correct capacities for these edges and also of matching is the perfect matching, and source. After this involving from the bipartite graph and Algorithm, one will generate a possible matching (if it is possible).

A maximum matching has the maximum cardinality. A perfect matching is a maximum matching. But the opposite is not necessarily true.

It's possible to access `dinic.edges`, which is a vector that contains all edges and also its respective attributes, like the *flow* passing through each edge. Remember to consider that negative flow exist for reverse edges.

6.2.2 Minimum Cut

In computer science and optimization theory, the max-flow min-cut theorem states that, in a flow network, the maximum amount of flow passing from the source to the sink is equal to the total weight of the edges in a minimum cut, i.e., the smallest total weight of the edges which if removed would disconnect the source from the sink.

Let's define an s-t cut $C = (S\text{-component}, T\text{-component})$ as a partition of $V \in G$ such that source $s \in S\text{-component}$ and sink $t \in T\text{-component}$. Let's also define a cut-set of C to be the set $(u, v) \in E \mid u \in S\text{-component}, v \in T\text{-component}$ such that if all edges in the cut-set of C are removed, the Max Flow from s to t is 0 (i.e., s and t are disconnected). The cost of an s-t cut C is defined by the sum of the capacities of the edges in the cut-set of C .

The by-product of computing Max Flow is Min Cut! After Max Flow algorithm stops, we run graph traversal (DFS/BFS) from source s again. All reachable vertices from source s using positive weighted edges in the residual graph belong to the S-component. All other unreachable vertices belong to the T-component. All edges connecting the S-component to the T-component belong to the cut-set of C . The Min Cut value is equal to the Max Flow value. This is the minimum over all possible s-t cuts values.

6.2.3 Minimum Vertex Cover

The **Konig's Theorem** describes an equivalence between the maximum matching problem and the minimum vertex cover problem in bipartite graphs.

Therefore, the value for the maximum flow in a bipartite graph is the same value as the number of nodes in a minimum vertex cover.

To retrieve the set of vertices of the minimum vertex cover:

- Give orientation to the edges, matched edges start from the right side of the graph to the left side, and free edges start from the left side of the graph to the right side.
- Run DFS from unmatched nodes of the left side, in this traversal some nodes will become visited, others will stay unvisited.

- The MVC nodes are the visited nodes from the right side, and unvisited nodes from the left side.

$$MVC = Visited_{Right} \cup Unvisited_{Left}$$

min-vertex-cover.cpp

Description: computes the min vertex cover for a bipartite graph matched with dinitz

Time: $\mathcal{O}(E \log(E))$

963b5e, 55 lines

```
// a vertex cover is a set of vertices that contains
// at least one endpoint for each edge in the bipartite match
// A vertex cover in minimum if no other vertex cover has fewer
// vertices.
// only for bipartite graphs
vector<ll> minVertexCover(Dinitz &dinitz) {
    ll n = dinitz.n;

    vector<vector<ll>> g(n);
    set<ll> left, right; // unique
    vector<bool> matched(n);

    for(auto e : dinitz.edges) {
        if (e.u == dinitz.src or e.u == dinitz.sink) continue;
        if (e.v == dinitz.src or e.v == dinitz.sink) continue;
        if (e.cap > 0) { // not retro edge

            left.insert(e.u);
            right.insert(e.v);

            if (e.flow == e.cap) {
                // orient matched edges from right to left
                g[e.v].pb(e.u);
                matched[e.u] = 1;
                matched[e.v] = 1;
            }
            else {
                // orient non-matched edges from left to right
                g[e.u].pb(e.v);
            }
        }
    }

    vector<bool> vis(n, 0);
    function<void (ll)> dfs = [&](ll u) {
        vis[u] = 1;
        for(auto v : g[u])
            if (!vis[v])
                dfs(v);
    };

    for(auto l : left) if (!matched[l]) {
        dfs(l);
    }

    vector<ll> ans;
    for(auto l : left) if (!vis[l]) {
        ans.pb(l);
    }
    for(auto r : right) if (vis[r]) {
        ans.pb(r);
    }

    // remember, right nodes ids are dislocated by an offset
    return ans;
}
```

6.2.4 Maximum Independent Set

A **Independent Set** is a subset of nodes, in which all pairs u, v in the subset are not adjacent (There is no direct edge between nodes u and v).

A **Maximum Independent Set** is a *Independent Set* with maximum cardinality;

The **Maximum Independent Set** is complementary to the **Minimum Vertex Cover**.

$$MaxIS = all_{Vertices} \setminus MVC$$

Therefore, to acquire the **Maximum Independent Set**, run the MVC algorithm and subtract them from the set of vertices and it will end up with the maxIS.

6.3 Minimum Cost Matching

6.3.1 Minimum Cost with Dinitz

min-cost-dinitz.cpp

Description: change bfs to spfa to attribute a weight for the edges

Time: SPFA is $\mathcal{O}(E)$ at average and $\mathcal{O}(VE)$ in the worst case

e51a5b, 88 lines

```
struct Dinitz {
    struct Edge { // u -> v
        ll u, v, cost, cap, flow=0;
    };

    vector<Edge> edges;
    vector<vector<ll>> g;
    vector<ll> dist, ptr; // uses dist instead of level

    // n need to be big enough for all nodes, including src/sink
    ll n, src, sink;
    Dinitz(ll nn, ll s = -1, ll t = -1) : n(nn+10) {
        src = (s == -1 ? n-2 : s);
        sink = (t == -1 ? n-1 : t);
        g.resize(n);
    }

    void addEdge(ll u, ll v, ll cost, ll cap, ll rcap = 0) { //
        rcap = retrocapacity for bidirectional edges
        g[u].push_back((ll)edges.size());
        edges.push_back({u, v, cost, cap});
        g[v].push_back((ll)edges.size());
        edges.push_back({v, u, -cost, rcap});
    }

    bool spfa() {
        dist.assign(n, INF);
        vector<bool> inqueue(n, false);

        queue<ll> q; q.push(src);
        dist[src] = 0;
        inqueue[src] = true;

        while (!q.empty()) {
            ll u = q.front(); q.pop();
            inqueue[u] = false;

            for (auto eid : g[u]) {
                auto const& e = edges[eid];
                if (e.flow >= e.cap) continue;
```

```

        if (dist[e.u] + e.cost < dist[e.v]) {
            dist[e.v] = dist[e.u] + e.cost;
            if (!inqueue[e.v]) {
                q.push(e.v);
                inqueue[e.v] = true;
            }
        }
    }
    return dist[sink] != INF;
}

11 min_cost = 0;
11 dfs(11 u, 11 f) {
    if (f == 0 or u == sink) return f;
    for (11 &i = ptr[u]; i < (11)g[u].size();) {
        11 eid = g[u][i++];
        auto &e = edges[eid];
        if(e.flow >= e.cap or (dist[e.u] + e.cost) != dist[
            e.v]) continue;
        11 newf = dfs(e.v, min(f, e.cap - e.flow));
        if (newf == 0) continue;
        e.flow += newf;
        edges[eid^1].flow -= newf;
        min_cost += e.cost * newf;
        return newf;
    }
    return 0;
}

11 max_flow = 0;
pair<11, 11> flow(bool reset_flow_cost = true) {
    if (reset_flow_cost) {
        max_flow = 0;
        min_cost = 0;
        for(11 u=0; u<n; u++) {
            for(auto eid : g[u]) {
                auto &e = edges[eid];
                e.flow = 0;
            }
        }
    }
    while (spfa()) {
        ptr.assign(n, 0);
        while (11 newf = dfs(src, INF))
            max_flow += newf;
    }
    return {min_cost, max_flow};
}
};

```

There are n jobs and n workers. Each worker specifies the amount of money they expect for a particular job. Each worker can be assigned to only one job. The objective is to assign jobs to workers in a way that minimizes the total cost.

Given an $n \times n$ matrix A , the task is to select one number from each row such that exactly one number is chosen from each column, and the sum of the selected numbers is minimized.

Given an $n \times n$ matrix A , the task is to find a permutation p of length n such that the value $\sum A[i][p[i]]$ is minimized.

Consider a complete bipartite graph with n vertices per part, where each edge is assigned a weight. The objective is to find a perfect matching with the minimum total weight.

It is important to note that all the above scenarios are "square" problems, meaning both dimensions are always equal to n . In practice, similar "rectangular" formulations are often encountered, where n is not equal to m , and the task is to select $\min(n, m)$ elements. However, it can be observed that a "rectangular" problem can always be transformed into a "square" problem by adding rows or columns with zero or infinite values, respectively.

We also note that by analogy with the search for a minimum solution, one can also pose the problem of finding a maximum solution. However, these two problems are equivalent to each other: it is enough to multiply all the weights by -1 .

hungarian.cpp

Description: Solves the assignment problem

Time: $\mathcal{O}(n^3)$

06d970, 72 lines

```

// Hungaro
//
// Resolve o problema de assignment (matriz n x n)
// Colocar os valores da matriz em 'a' (pode < 0)
// assignment() retorna um par com o valor do
// assignment minimo, e a coluna escolhida por cada linha
// 0-idx
//
//  $\mathcal{O}(n^3)$ 

```

```

template<typename T> struct Hungarian {
    int n;
    vector<vector<T>>> a;
    vector<T> u, v;
    vector<int> p, way;
    T inf;

    Hungarian(int n_) : n(n_), u(n+1), v(n+1), p(n+1), way(n+1) {
        a = vector<vector<T>>>(n, vector<T>(n));
        inf = numeric_limits<T>::max();
    }

    pair<T, vector<int>>> assignment() {
        for (int i = 1; i <= n; i++) {
            p[0] = i;
            int j0 = 0;
            vector<T> minv(n+1, inf);
            vector<int> used(n+1, 0);
            do {
                used[j0] = true;
                int i0 = p[j0], j1 = -1;
                T delta = inf;
                for (int j = 1; j <= n; j++) if (!used[j]) {

```

```

                    T cur = a[i0-1][j-1] - u[i0] - v[j];
                    if (cur < minv[j]) minv[j] = cur, way[j] = j0;
                    if (minv[j] < delta) delta = minv[j], j1 = j;
                }
            } for (int j = 0; j <= n; j++)
                if (used[j]) u[p[j]] += delta, v[j] -= delta;
                else minv[j] -= delta;
            j0 = j1;
        } while (p[j0] != 0);
        do {
            int j1 = way[j0];
            p[j0] = p[j1];
            j0 = j1;
        } while (j0);
    }
    vector<int> ans(n);
    for (int j = 1; j <= n; j++) ans[p[j]-1] = j-1;
    return make_pair(-v[0], ans);
}
};

int32_t main(){ sws;
    11 n; cin >> n;
    Hungarian<11> h(n);

    for(11 i=0; i<n; i++) {
        for(11 j=0; j<n; j++) {
            cin >> h.a[i][j];
        }
    }

    auto [cost, match] = h.assignment();

    cout << cost << endl;

    for(11 i=0; i<n; i++) {
        cout << i+1 << " " << match[i]+1 << endl;
    }
}

```

6.4 Coloring

6.4.1 k-Coloring

TODO: Add this blog

<https://codeforces.com/blog/entry/57496>

https://en.wikipedia.org/wiki/Graph_coloring

<https://open.kattis.com/problems/coloring>

6.5 Shortest Paths

For weighted directed graphs

6.5.1 Dijkstra

Single Source and there **cannot** be any negative weighted edges.

dijkstra.cpp

Description: By keeping track of the distances sorted using a priority queue of candidates. if an edge can reduce the current min distance, insert into the priority queue. ONLY when the vertice is dequeued and its cost is $\leq d[u]$, it is in fact a part of a shortest path

Time: $\mathcal{O}((V + E) \log V)$

76e3a5, 21 lines

```

priority_queue<p11, vector<p11>, greater<p11>> pq; // min pq
vector<vector<p11>>> g(MAX);
vector<11> d(MAX, INF);

void dijkstra(11 start){

```



```
    pq.push({0, start});
    d[start] = 0;

    while(!pq.empty()){

        auto [cost, u] = pq.top(); pq.pop();
        if (cost > d[u]) continue;

        for (auto [v, w] : g[u]) {
            if (d[u] + w < d[v]) {
                d[v] = d[u] + w;
                pq.push({d[v], v});
            }
        }
    }
}
```

By inverting the sorting order, Dijkstra can be modified for the opposite operation: *longest paths*.

Furthermore, Dijkstra be extended to keep track of more information, such as:

- how many minimum-price routes are there? (modulo $10^9 + 7$)
- what is the minimum number of flights in a minimum-price route?
- what is the maximum number of flights in a minimum-price route?

```
extendedDijkstra.cpp
Description: Also counts the numbers of shortest paths, the minimum and maximum number of edges transversed in any shortest path.
Time:  $\mathcal{O}((V + E) \log V)$ 
f93094, 32 lines

priority_queue<pll, vector<pll>, greater<pll>> pq; // min pq
vector<vector<pll>> g(MAX);
vector<ll> d(MAX, INF), ways(MAX, 0), mx(MAX, -INF), mn(MAX, INF);
// INF = INT64_MAX

void dijkstra(ll start){
    pq.push({0, start});
    ways[start] = 1;
    d[start] = mn[start] = mx[start] = 0;

    while( !pq.empty() ){
        auto [p1, u] = pq.top(); pq.pop();
        if (p1 > d[u]) continue;
        for(auto [v, p2] : g[u]){
            // reset info, shorter path found, previous ones are discarded
            if (d[u] + p2 < d[v]){
                d[v] = d[u] + p2;
                ways[v] = ways[u];
                mx[v] = mx[u]+1;
                mn[v] = mn[u]+1;

                pq.push({d[v], v});
            }
            // same distance, different path, update info
            else if (d[u] + p2 == d[v]) {
                ways[v] = (ways[v] + ways[u]) % MOD;
                mn[v] = min(mn[v], mn[u]+1);
                mx[v] = max(mx[v], mx[u]+1);
            }
        }
    }
}
```

```
    }
    }
}

6.5.2 Bellman-Ford
Single Source and it supports negative edges

Conjecture: After at most n-1 (Vertices-1) iterations, all shortest paths will be found.

bellman-ford.cpp
Description: n-1 iterations is sufficient to find all shortest paths
Time:  $\mathcal{O}(V * E) \rightarrow \mathcal{O}(N^2)$ 
d749f1, 15 lines

using T = array<ll, 3>;
vector<T> edges;
vector<ll> d(MAX, INF);
// INF = 0x3f3f3f3f3f3f3f3f, to avoid overflow

void BellmanFord(ll src, ll n) {
    d[src] = 0;
    for(ll i=0; i<n-1; i++) { // n-1 iterations
        for(auto [u, v, w] : edges) {
            if (d[u] + w < d[v]) {
                d[v] = d[u] + w;
            }
        }
    }
}

By iterating once more, one can check if the last iteration reduced once again any distance. If so, it means that there must be a negative cycle, because the shortest distance should have been found before elseway.

To retrieve the negative cycle itself, one can keep track of the last vertice that reaches a considered vertice

bellman-ford-cycle.cpp
Description: By using the property that n-1 iterations is sufficient to find all shortest paths in a graph that doesn't have negative cycles. Iterate n times and retrieve the path using a vector of parents
Time:  $\mathcal{O}(V * E) \rightarrow \mathcal{O}(N^2)$ 
0506b5, 35 lines

using T = array<ll, 3>;
vector<T> edges;
vector<ll> d(MAX, INF), p(MAX, -1);
vector<ll> cycle;
// INF = 0x3f3f3f3f3f3f3f3f, to avoid overflow

void BellmanFordCycle(ll src, ll n) {
    d[src] = 0;
    ll x = -1; // possible node inside a negative cycle
    for(ll i=0; i<n; i++) { // n iterations
        x = -1;
        for(auto [u, v, w] : edges) {
            if (d[u] + w < d[v]) {
                d[v] = d[u] + w;
                p[v] = u;
                x = v;
            }
        }
    }

    if (x != -1) {
        // set x to a node, contained in a cycle in p[]
    }
}
```

```
for(ll i=0; i<n; i++) x = p[x];

ll tmp = x;
do {
    cycle.pb(tmp);
    tmp = p[tmp];
}
while (tmp != x);
cycle.pb(x);

reverse(cycle.begin(), cycle.end());
}
}
```

```
6.5.3 Floyd Warshall
All-Pair Shortest Paths

floyd-warshall.cpp
Description: By using an auxiliar vertice, check if a smaller path exists between a pair (u, v) of vertices, if so, update minimum distance.
Time:  $\mathcal{O}(V^3)$ 
fa5f60, 15 lines

// N < sqrt(1e8) = 460
ll N = 200;

// d[u][v] = INF (no edge)
vector<vll> d(N+1, vll(N+1, INF));

void floydWarshall() { // O(N^3)
    for(ll i=1; i<=N; i++) d[i][i] = 0;

    for(ll aux=1; aux<=N; aux++)
        for(ll u=1; u<=N; u++)
            for(ll v=1; v<=N; v++)
                if (d[u][aux] < INF and d[v][aux] < INF)
                    d[u][v] = min(d[u][v], d[u][aux] + d[v][aux]);
}
}
```

6.6 Undirected Graph

Bridges and Articulation Points are concepts for undirected graphs!

6.6.1 Bridges (Cut Edges)

Also called **isthmus** or **cut arc**.

A back-edge is never a bridge!

A **lowlink** for a vertice *U* is the closest vertice to the root reachable using only span edges and a *single* back-edge, starting in the subtree of *U*.

After constructing a DFS Tree, an edge (u, v) is a bridge \iff there is no back-edge from *v* (or a descendent of *v*) to *u* (or an ancestor of *u*)

To do this efficiently, it's used *tin*[*i*] (entry time of node *i*) and *low*[*i*] (minimum entry time considering all nodes that can be reached from node *i*).

In another words, a edge (u, v) is a bridge \iff the *low*[*v*] \geq *tin*[*u*].

bridges.cpp
Description: Using the concepts of entry time (tin) and lowlink (low), an edge is a bridge if, and only if, low[v] > tin[u]
Time: $\mathcal{O}(V + E)$

87e0d3, 25 lines

```
vector<vll> g(MAX);
ll timer = 1;
ll tin[MAX], low[MAX];
vector<pll> bridges;

void dfs(ll u, ll p = -1){
    tin[u] = low[u] = timer++;
    for(auto v : g[u]) if (v != p) {
        if (tin[v]) // v was visited ({u,v} is a back-edge)
            // considering a single back-edge:
            low[u] = min(low[u], tin[v]);
        else { // v wasn't visited ({u, v} is a span-edge)
            dfs(v, u);
            // after low[v] was computed by dfs(v, u):
            low[u] = min(low[u], low[v]);
            if (low[v] > tin[u])
                bridges.pb({u, v});
        }
    }
}

void findBridges(ll n) {
    for(ll i=1; i<=n; i++) if (!tin[i])
        dfs(i);
}
```

6.6.2 Bridge Tree

After merging *vertices* of a **2-edge connected component** into single vertices, and leaving only bridges, one can generate a Bridge Tree.

Every **2-edge connected component** has following properties:

- For each pair of vertices A, B inside the same component, there are at least 2 distinct paths from A to B (which may repeat vertices).

bridgeTree.cpp
Description: After finding bridges, set an component id for each vertice, then merge vertices that are in the same 2-edge connected component
Time: $\mathcal{O}(V + E)$

6d00bd, 47 lines

```
// g: u -> {v, edge id}
vector<vector<pll>> g(MAX);
vector<vll> gc(MAX);
ll timer = 1;
ll tin[MAX], low[MAX], comp[MAX];
bool isBridge[MAX];

void dfs(ll u, ll p = -1) {
    tin[u] = low[u] = timer++;
    for(auto [v, id] : g[u]) if (v != p) {
        if (tin[v])
            low[u] = min(low[u], tin[v]);
        else {
            dfs(v, u);
            low[u] = min(low[u], low[v]);
            if (low[v] > tin[u])
                isBridge[id] = 1;
        }
    }
}
```

```
}

void dfs2(ll u, ll c, ll p = -1) {
    comp[u] = c;
    for(auto [v, id] : g[u]) if (v != p) {
        if (isBridge[id]) continue;
        if (!comp[v]) dfs2(v, c, u);
    }
}

void bridgeTree(ll n) {
    // find bridges
    for(ll i=1; i<=n; i++) if (!tin[i])
        dfs(i);

    // find components
    for(ll i=1; i<=n; i++) if (!comp[i])
        dfs2(i, i);

    // condensate into a TREE (or TREES if disconnected)
    for(ll u=1; u<=n; u++) {
        for(auto [v, id] : g[u]) {
            if (comp[u] != comp[v]) {
                gc[comp[u]].pb(comp[v]);
            }
        }
    }
}
```

6.6.3 Articulation Points

One Vertice in a graph is considered a Articulation Points or Cut Vertice if its removal in the graph will generate more disconnected components

articulation.cpp
Description: if low[v] >= tin[u], u is an articulation points The root is a corner case
Time: $\mathcal{O}(V + E)$

8707a0, 29 lines

```
vector<vll> g(MAX);
ll timer = 1;
ll low[MAX], tin[MAX], isAP[MAX];
// when vertex i is removed from graph
// isAP[i] is the quantity of new disjoint components created
// isAP[i] >= 1 {i is a Articulation Point}
void dfs(ll u, ll p = -1) {
    low[u] = tin[u] = timer++;

    for(auto v : g[u]) if (v != p) {
        if (tin[v]) // visited
            low[u] = min(low[u], tin[v]);
        else { // not visited
            dfs(v, u);
            low[u] = min(low[u], low[v]);

            if (low[v] >= tin[u])
                isAP[u]++;
        }
    }

    // corner case: root
    if (p == -1 and isAP[u]) isAP[u]--;
}

void findAP(ll n) {
    for(ll i=1; i<=n; i++) if (!tin[i])
        dfs(i);
}
```

6.6.4 Block Cut Tree

After merging *edges* of a **2-vertex connected component** into single vertices, one can obtain a block cut tree.

2-vertex connected components are also called as biconnected component

Every bridge by itself is a biconnected component

Each edge in the block-cut tree connects exactly an Articulation Point and a biconnected component (bipartite graph)

Each biconnected component has the following properties:

- For each pair of edges, there is a cycle that contains both edges
- For each pair of vertices A, B inside the same connected component, there are at least 2 distinct paths from A to B (which do not repeat vertices).

blockCutTree.cpp
Description: After Merging 2-Vertex Connected Components, one can generate a block cut tree
Time: $\mathcal{O}(V + E)$

f752d5, 100 lines

```
// Block-Cut Tree (bruno monteiro)
//
// Cria a block-cut tree, uma arvore com os blocos
// e os pontos de articulacao
// Blocos sao as componentes 2-vertice-conexas maximais
// Uma 2-coloracao da arvore eh tal que uma cor sao
// os componentes, e a outra cor sao os pontos de articulacao
//
// Funciona para grafo nao conexo
//
// isAP[i] responde o numero de novas componentes conexas
// criadas apos a remocao de i do grafo g
// Se isAP[i] >= 1, i eh ponto de articulacao
//
// Para todo i < blocks.size()
// blocks[i] eh uma componente 2-vertce-conexa maximal
// blockEdges[i] sao as arestas do bloco i
//
// tree eh a arvore block-cut-tree
// tree[i] eh um vertice da arvore que corresponde ao bloco i
//
// comp[i] responde a qual vertice da arvore vertice i pertence
//
// Arvore tem no maximo 2n vertices
//
// O(n+m)

// 0-idx graph!!!
vector<vll> g(MAX), tree, blocks;
vector<vector<pll>> blockEdges;
stack<ll> st; // st for vertices,
stack<pll> st2; // st2 for edges
vector<ll> low, tin, comp, isAP;
ll timer = 1;

void dfs(ll u, ll p = -1) {
    low[u] = tin[u] = timer++;

    for(auto [v, id] : g[u]) if (v != p) {
        if (tin[v])
            low[u] = min(low[u], tin[v]);
        else {
            dfs(v, u);
            low[u] = min(low[u], low[v]);
            if (low[v] >= tin[u])
                isAP[u]++;
            if (comp[u] != comp[v])
                blockEdges[u].pb({v, id});
        }
    }

    st.push(u);
}
```

```

// add only back-edges to stack
if (p != -1) st2.push({u, p});
for(auto v : g[u]) if (v != p) {
    if (tin[v] != -1) // visited
        st2.push({u, v});
}

for(auto v : g[u]) if (v != p) {
    if (tin[v] != -1) // visited
        low[u] = min(low[u], tin[v]);
    else { // not visited
        dfs(v, u);
        low[u] = min(low[u], low[v]);

        if (low[v] >= tin[u]) {
            isAP[u] += 1;

            blocks.pb(vll(1, u));
            while(blocks.back().back() != v)
                blocks.back().pb(st2.top()), st2.pop();

            blockEdges.pb(vector<pll>(1, st2.top())), st2.pop();
            while(blockEdges.back().back() != pair<ll, ll>(v, u))
                blockEdges.back().pb(st2.top()), st2.pop();
        }
    }
}

// corner case: root
if (p == -1 and isAP[u]) isAP[u]--;
}

void blockCutTree(ll n) {

    // initialize vectors and reset
    tree.clear(), blocks.clear(), blockEdges.clear();
    st = stack<ll>(), st2 = stack<pll>();
    tin.assign(n, -1);
    low.assign(n, 0), comp.assign(n, 0), isAP.assign(n, 0);
    timer = 1;

    // find Articulation Points
    for(ll i=0; i<n; i++) if (tin[i] == -1)
        dfs(i);

    // set component id for APs
    tree.assign(blocks.size(), vll());
    for(ll i=0; i<n; i++) if (isAP[i])
        comp[i] = tree.size(), tree.pb(vll());

    // set component id for non-APs and construct tree
    for(ll u=0; u<(ll)blocks.size(); u++) {
        for(auto v : blocks[u]) {
            if (!isAP[v])
                comp[v] = u;
            else
                tree[u].pb(comp[v]), tree[comp[v]].pb(u);
        }
    }
}

```

6.6.5 Strong Orientation

A **strong orientation** of an undirected graph is an assignment of a direction to each edge that makes it a strongly connected graph. That is, after the orientation we should be able to visit any vertex from any vertex by following the directed edges.

Of course, this cannot be done to every graph. Consider a **bridge** in a graph. We have to assign a direction to it and by doing so we make this bridge "crossable" in only one direction. That means we can't go from one of the bridge's ends to the other, so we can't make the graph strongly connected.

Now consider a DFS through a bridgeless connected graph. Clearly, we will visit each vertex. And since there are no bridges, we can remove any DFS tree edge and still be able to go from below the edge to above the edge by using a path that contains at least one back edge. From this follows that from any vertex we can go to the root of the DFS tree. Also, from the root of the DFS tree we can visit any vertex we choose. We found a strong orientation!

In other words, to strongly orient a bridgeless connected graph, run a DFS on it and let the DFS tree edges point away from the DFS root and all other edges from the descendant to the ancestor in the DFS tree.

The result that bridgeless connected graphs are exactly the graphs that have strong orientations is called **Robbins' theorem**.

Acyclic Graph Orientation

Problem: Given an undirected graph, your task is to choose a direction for each edge so that the resulting directed graph is acyclic.

Solution: Do a dfs tree, every span-edge is oriented according to the dfs transversal, and every back-edge is oriented contrary to the dfs transversal

6.6.6 Minimum Spanning Tree

A minimum spanning tree (MST) or minimum weight spanning tree is a subset of the edges of a connected, edge-weighted undirected graph that connects all the vertices together, without any cycles and with the minimum possible total edge weight. That is, it is a spanning tree whose sum of edge weights is as small as possible.

kruskal.cpp

Description: Sort all edges in crescent order by weight, include all edges which joins two disconnected trees. In case of tie, choose whichever. Dont include edges that will join a already connected part of the tree.
Time: $\mathcal{O}(E \log E\alpha)$

```

// use DSU struct
struct DSU{};

```

```

set<array<ll, 3>> edges;

int32_t main(){ sws;
    ll n, m; cin >> n >> m;
    DSU dsu(n+1);
    for(ll i=0; i<m; i++) {
        ll u, v, w; cin >> u >> v >> w;
        edges.insert({w, u, v});
    }
    ll minCost = 0;
    for(auto [w, u, v] : edges) {
        if (dsu.find(u) != dsu.find(v)) {
            dsu.join(u, v);
            minCost += w;
        }
    }
    cout << minCost << endl;
}

```

6.7 Directed Graph

6.7.1 Topological Sort

Sort a directed graph with no cycles (DAG) in an order which each source of an edge is visited before the sink of this edge.

Cannot have cycles, because it would create a contradiction of which vertices whould come before.

It can be done with a DFS, appending in the reverse order of transversal. Also a stack can be used to reverse order

toposort.cpp

Description: Using DFS pos order transversal and inverting the order, one can obtain the topological order

Time: $\mathcal{O}(V + E)$ 75f781, 17 lines

```

vector<vll> g(MAX, vll());
vector<bool> vis;
vll topological;

void dfs(ll u) {
    vis[u] = 1;
    for(auto v : g[u]) if (!vis[v]) dfs(v);
    topological.pb(u);
}

```

```

// 1 - indexed
void topological_sort(ll n) {
    vis.assign(n+1, 0);
    topological.clear();
    for(ll i=1; i<=n; i++) if (!vis[i]) dfs(i);
    reverse(topological.begin(), topological.end());
}

```

6.7.2 Kosaraju

A Strongly Connected Component is a maximal subgraph in which every vertex is reachable from any vertex inside this same subgraph.

A important *property* is that the inverted graph or transposed graph has the same SCCs as the original graph.

kosaraju.cpp

Description: By using the fact that the inverted graph has the same SCCs, just do a DFS twice to find all SCCs. A condensated graph can be created if wished. The condensated graph is a DAG!!
Time: $\mathcal{O}(V + E)$

381904, 45 lines

```
struct Kosaraju {
    ll n;
    vector<vll> g, gi, gc;
    vector<bool> vis;
    vector<ll> comp;
    stack<ll, vll> st;

    void dfs(ll u) { // g
        vis[u] = 1;
        for(auto v : g[u]) if (!vis[v]) dfs(v);
        st.push(u);
    }

    void dfs2(ll u, ll c) { // gi
        comp[u] = c;
        for(auto v : gi[u]) if (comp[v] == -1) dfs2(v, c);
    }

    Kosaraju(vector<vll> &g_)
        : g(g_), n(g_.size()-1) { // 1-idx

        gi.assign(n+1, vll());
        for(ll i=1; i<=n; i++) {
            for(auto j : g[i])
                gi[j].pb(i);
        }

        gc.assign(n+1, vll());
        vis.assign(n+1, 0);
        comp.assign(n+1, -1);
        st = stack<ll, vll>();

        for(ll i=1; i<=n; i++) if (!vis[i]) dfs(i);

        while(!st.empty()) {
            auto u = st.top(); st.pop();
            if (comp[u] == -1) dfs2(u, u);
        }

        for(ll i=1; i<=n; i++)
            for(auto v : g[u])
                gc[comp[u]].pb(comp[v]);
    }
};
```

6.7.3 2-SAT

SAT (Boolean satisfiability problem) is NP-Complete.

2-SAT is a restriction of the SAT problem, in 2-SAT every clause has exactly two variables: $(X_1 \vee X_2) \wedge (X_2 \vee X_3)$

Every restriction or implication are represented in the graph as directed edges.

The algorithm uses kosaraju to check if any $(X$ and $\neg X)$ are in the same Strongly Connected Component (which implies that the problem is impossible).

If it doesn't, there is at least one solution, which can be generated using the topological sort of the same kosaraju (opting for the variables that appers latter in the sorted order)

2sat.cpp

Description: Kosaraju to find if there are SCCs. If there are not cycles, use toposort to choose states
Time: $\mathcal{O}(V + E)$

87417c, 83 lines

```
// 0-idx graph !!!!
struct TwoSat {
    ll N; // needs to be the twice of the number of variables
    // node with idx 2x => variable x
    // node with idx 2x+1 => variable !x

    vector<vll> g, gi;
    // g = graph; gi = transposed graph (all edges are inverted)

    TwoSat(ll n) { // number of variables (add +1 faor 1-idx)
        N = 2*n;
        g.assign(N, vll());
        gi.assign(N, vll());
    }

    ll idx; // component idx
    vector<ll> comp, order; // topological order (reversed)
    vector<bool> vis, chosen;
    // chosen[x] == 0 -> x was assigned
    // chosen[x] == 1 -> !x was assigned

    // dfs and dfs2 are part of kosaraju algorithm
    void dfs(ll u) {
        vis[u] = 1;
        for (ll v : g[u]) if (!vis[v]) dfs(v);
        order.pb(u);
    }

    void dfs2(ll u, ll c) {
        comp[u] = c;
        for (ll v : gi[u]) if (comp[v] == -1) dfs2(v, c);
    }

    bool solve() {
        vis.assign(N, 0);
        order = vector<ll>();
        for (ll i = 0; i < N; i++) if (!vis[i]) dfs(i);

        comp.assign(N, -1); // comp = 0 can exist
        idx = 1;
        for(ll i=(ll)order.size()-1; i>=0; i--) {
            ll u = order[i];
            if (comp[u] == -1) dfs2(u, idx++);
        }

        chosen.assign(N/2, 0);
        for (ll i = 0; i < N; i += 2) {
            // x and !x in the same component => contradiction
            if (comp[i] == comp[i+1]) return false;
            chosen[i/2] = comp[i] < comp[i+1]; // choose latter node
        }
        return true;
    }

    // a (with flagA) implies => b (with flagB)
    void add(ll a, bool fa, ll b, bool fb) {
        // {fa == 0} => a
        // {fa == 1} => !a
    }
};
```

```
a = 2*a + fa;
b = 2*b + fb;
g[a].pb(b);
gi[b].pb(a);
}

// force a state for a certain variable (must be true)
void force(ll a, bool fa) {
    add(a, fa^1, a, fa);
}

// xor operation: one must exist, and only one can exist
void exclusive(ll a, bool fa, ll b, bool fb) {
    add(a, fa^0, b, fb^1);
    add(a, fa^1, b, fb^0);
    add(b, fb^0, a, fa^1);
    add(b, fb^1, a, fa^0);
}

// nand operation: no more than one can exist
void nand(ll a, bool fa, ll b, bool fb) {
    add(a, fa^0, b, fb^1);
    add(b, fb^0, a, fa^1);
}

};
```

6.8 Trees

lca.cpp

Description: Solves LCA for trees
Time: $\mathcal{O}(N \log(N))$ to build, $\mathcal{O}(\log(N))$ per query

7afc1a, 54 lines

```
struct BinaryLifting {
    ll n, logN = 20; // ~1e6
    vector<vll> g;
    vector<ll> depth;
    vector<vll> up;

    BinaryLifting(vector<vll> &g_)
        : g(g_), n(g_.size() + 1) { // 1-idx
            depth.assign(n, 0);

            while((1 << logN) < n) logN++;
            up.assign(n, vll(logN, 0));
            build();
        }

    void build(ll u = 1, ll p = -1) {
        for(ll i=1; i<logN; i++) {
            up[u][i] = up[ up[u][i-1] ][i-1];
        }

        for(auto v : g[u]) if (v != p) {
            up[v][0] = u;
            depth[v] = depth[u] + 1;
            build(v, u);
        }
    }

    ll go(ll u, ll dist) { // O(log(n))
        for(ll i=logN-1; i>=0; i--) { // bigger jumps first
            if (dist & (1LL << i)) {
                u = up[u][i];
            }
        }
        return u;
    }

    ll lca(ll a, ll b) { // O(log(n))
        if (depth[a] < depth[b]) swap(a, b);
```

```
a = go(a, depth[a] - depth[b]);
if (a == b) return a;

for(ll i=logN-1; i>=0; i--) {
    if (up[a][i] != up[b][i]) {
        a = up[a][i];
        b = up[b][i];
    }
}
return up[a][0];
}

ll lca(ll a, ll b, ll root) { // lca(a, b) when tree is
    rooted at 'root'
    return lca(a, b)^lca(b, root)^lca(a, root); //magic
}

};
```

queryTree.cpp
Description: Binary Lifting for min, max weight present in a simple path
Time: $\mathcal{O}(N \log(N))$ to build; $\mathcal{O}(\log(N))$ per query

75ba37, 67 lines

```
struct BinaryLifting {
    ll n, logN = 20; // ~1e6
    vector<vp11> g;
    vector<ll> depth;
    vector<v11> up, mx, mn;

    BinaryLifting(vector<vp11> &g_)
        : g(g_), n(g_.size() + 1) { // 1-idx
            depth.assign(n, 0);

            while((1 << logN) < n) logN++;
            up.assign(n, v11(logN, 0));
            mx.assign(n, v11(logN, -INF));
            mn.assign(n, v11(logN, INF));
            build();
        }

    void build(ll u = 1, ll p = -1) {

        for(ll i=1; i<logN; i++) {
            mx[u][i] = max(mx[u][i-1], mx[ up[u][i-1] ][i-1]);
            mn[u][i] = min(mn[u][i-1], mn[ up[u][i-1] ][i-1]);
            up[u][i] = up[ up[u][i-1] ][i-1];
        }

        for(auto [v, w] : g[u]) if (v != p) {
            mx[v][0] = mn[v][0] = w;
            up[v][0] = u;
            depth[v] = depth[u] + 1;
            build(v, u);
        }
    }

    array<ll, 3> go(ll u, ll dist) { //  $\mathcal{O}(\log(n))$ 
        ll mxval = -INF, mnval = INF;
        for(ll i=logN-1; i>=0; i--) { // bigger jumps first
            if (dist & (1LL << i)) {
                mxval = max(mxval, mx[u][i]);
                mnval = min(mnval, mn[u][i]);
                u = up[u][i];
            }
        }
        return {u, mxval, mnval};
    }

    array<ll, 3> query(ll u, ll v) { //  $\mathcal{O}(\log(n))$ 
        if (depth[u] < depth[v]) swap(u, v);
```

```
auto [a, mxval, mnval] = go(u, depth[u] - depth[v]);
ll b = v;

if (a == b) return {a, mxval, mnval};

for(ll i=logN-1; i>=0; i--) {
    if (up[a][i] != up[b][i]) {
        mxval = max({mxval, mx[a][i], mx[b][i]});
        mnval = min({mnval, mn[a][i], mn[b][i]});
        a = up[a][i];
        b = up[b][i];
    }
}

mxval = max({mxval, mx[a][0], mx[b][0]});
mnval = min({mnval, mn[a][0], mn[b][0]});
return {up[a][0], mxval, mnval};
}

};
```

Mathematics (7)

7.1 Modular Arithmetic

modular.cpp
Description: mint struct for modular arithmetic operations
Time: $\mathcal{O}(1)$ for most operations, $\mathcal{O}(\log(n))$ for division and exponentiation

```
// supports operations between int/ll and mint,
// and it will return a mint object independently of the order
// of operations
template <ll P> struct Z {
    ll val;

    Z(ll a = 0) {
        val = a % P;
        if (val < 0) val += P;
    }

    Z& operator +=(Z rhs) {
        val += rhs.val;
        if (val >= P) val -= P;
        return *this;
    }

    friend Z operator +(Z lhs, Z rhs) { return lhs += rhs; }

    Z& operator --(Z rhs) {
        val += P - rhs.val;
        if (val >= P) val -= P;
        return *this;
    }

    friend Z operator -(Z lhs, Z rhs) { return lhs -= rhs; }

    Z& operator *=(Z rhs) {
        val = (val * rhs.val) % P;
        return *this;
    }

    friend Z operator *(Z lhs, Z rhs) { return lhs *= rhs; }

    Z fexp(Z x, ll i) {
        if (i == 0) return 1;
        if (i == 1) return x;
        Z m = fexp(x, i/2);
        m *= m;
        if (i & 1) return m * x;
        else return m;
    }
};
```

```
Z& operator /=(Z rhs) {
    return *this *= fexp(rhs, P-2);
}

friend Z operator /(Z lhs, Z rhs) { return lhs /= rhs; }

bool operator ==(Z rhs) { return val == rhs.val; }

bool operator !=(Z rhs) { return val != rhs.val; }

friend ostream& operator <<(ostream& out, Z a) { return out
    << a.val; }

friend istream& operator >>(istream& in, Z& a) {
    ll x; in >> x;
    a = Z(x);
    return in;
}

};

using mint = Z<MOD>;
```

7.1.1 Lucas's Theorem

$$\binom{n}{m} \equiv \prod_{i=0}^k \binom{n_i}{m_i} \pmod{p}$$

For p prime. n_i and m_i are the coefficients of the representations of n and m in base p .

Example:

$11 \text{ (in base } p=3) = 1 \cdot 3^2 + 0 \cdot 3^1 + 2 \cdot 3^0$
 $\implies n_2 = 1, n_1 = 0, n_0 = 2$

7.2 Combinatorics

$$\binom{n}{m} = \frac{n!}{m! \cdot (n-m)!}, \quad 0 \leq m \leq n$$

$$0, \quad \text{otherwise}$$

7.2.1 Factorial

n	1	2	3	4	5	6	7	8	9	10
$n!$	1	2	6	24	120	720	5040	40320	362880	3628800
n	11	12	13	14	15	16	17			
$n!$	4.0e7	4.8e8	6.2e9	8.7e10	1.3e12	2.1e13	3.6e14			
n	20	25	30	40	50	100	150	171		
$n!$	2e18	2e25	3e32	8e47	3e64	9e157	6e262	>DBL_MAX		

7.2.2 Combinatorial Struct

```
combinatorics.cpp
Description: basic operations for combinatorics problems under a certain modulo
Time:  $\mathcal{O}(n)$  to construct,  $\mathcal{O}(1)$  operations

// remeber to import mint struct !!
struct Combinatorics {
    vector<mint> fact, ifact;

    Combinatorics(ll n) : fact(n+1), ifact(n+1) { // inclusive
        n
```

```

fact[0] = 1;
for (ll i=1; i<=n; i++) fact[i] = fact[i-1] * i;

ifact[n] = 1 / fact[n];
for (ll i=n; i>0; i--) ifact[i-1] = ifact[i] * i;
}

// "Combinacao / Binomio de Newton"
// n objects to place in k spaces
// the order doesn't matter, so we consider the re-
// orderings
// = n! / (k! * (n-k)!)
mint combination(ll n, ll k) {
    if (k < 0 or n < k) return 0;
    return fact[n] * ifact[k] * ifact[n-k];
}

// "Permutacao"
// n objects to place in n spaces
// = n!
mint permutation(ll n) {
    if (n < 0) return 0;
    return fact[n];
}

// "Permutacao com repeticao"
// n objects to place in n spaces
// some objects are equal
// therefore, we consider the possible re-orderings
// = n! / (k1! k2! k3!)
mint permutationRepetition(ll n, vector<ll> vec) {
    if (n < 0) return 0;
    mint ans = fact[n];
    for(auto val : vec) ans /= ifact[val];
    return ans;
}

// "Arranjo Simples"
// n objects to place in k spaces (k < n)
// n * (n-1) * ... * (n-k+1)
// = n! / (n-k)!
mint arrangement(ll n, ll k) {
    if (n < 0) return 0;
    return fact[n] * ifact[n-k];
}

// "Pontos e Virgulas"
// n stars to distribute among
// k distinct groups, that can contain 0, 1 or more stars
// separated by k-1 bars
// = (n+k-1)! / (n! * (k-1)!)
mint starsBars(ll n, ll k) {
    if (k == 0) {
        if (n == 0) return 1;
        else return 0;
    }
    return combination(n + k - 1, k - 1);
}

// a derangement is a permutation of the elements of a set
// in which no element appears in its original position
// In other words, a derangement is a permutation that has
// no fixed points.
// derangement(n) = subfactorial(n) = !n
// !n = (n-1) * ( ! (n-1) + ! (n-2) ), for n >= 2
// !1 = 0, !0 = 1
vector<mint> subfact;
void computeSubfactorials(ll n) {
    subfact.assign(n+1, 0);

```

```

subfact[0] = 1;
subfact[1] = 0;

for(ll i=2; i<=n; i++) {
    subfact[i] = (i-1) * (subfact[i-1] + subfact[i-2]);
}

// remeber to compute subfactorials first !!
mint derangement(ll n) {
    if (n < 0) return 0;
    return subfact[n];
}

};
Combinatorics op(MAX); // MAX = inclusive max_value for fact[]

```

7.2.3 Burside Lemma

Let G be a group that acts on a set X . The Burnside Lemma states that the number of distinct orbits is equal to the average number of points fixed by an element of G .

$$T = \frac{1}{|G|} \sum_{g \in G} |\text{fix}(g)|$$


Where a orbit $\text{orb}(x)$ is defined as

$$\text{orb}(x) = \{y \in X : \exists g \in G \text{ } gx = y\}$$

and $\text{fix}(g)$ is the set of elements in X fixed by g

$$\text{fix}(g) = \{x \in X : gx = x\}$$


Example1: With k distinct types of beads how many distinct necklaces of size n can be made? Considering that two necklaces are equal if the rotation of one gives the other.



$$\frac{1}{n} \sum_{i=1}^n k^{\gcd(i,n)}$$

Example2: Count the number of different $n \times n$ grids whose each square is black or white.

Two grids are considered to be different if it is not possible to rotate one of them so that they look the same.



$$G(\text{Rotations}) = 0^\circ, 90^\circ, 180^\circ, 270^\circ$$

$$\begin{aligned}
 f(\text{rotation}) = & \\
 & 0^\circ : 2^{(n^2)} \\
 & 90^\circ / 270^\circ : 2^{\frac{n^2}{4}}, & n_{\text{even}} \\
 & 2^{\frac{n^2-1}{4}} \cdot 2, & n_{\text{odd}} \\
 & 180^\circ : 2^{\frac{n^2}{2}}, & n_{\text{even}} \\
 & 2^{\frac{n^2-1}{2}} \cdot 2, & n_{\text{odd}}
 \end{aligned}$$

$$\text{ans} = \frac{1}{4} (f(0^\circ) + f(90^\circ) + f(180^\circ) + f(270^\circ))$$

7.2.4 Interesting Recursion

$$f(a, b) = f(a-1, b) + f(a, b-1)$$

$$\Rightarrow f(a, b) = \frac{(a+b)!}{a!b!} = \binom{a+b}{a}$$

Proof:

$$f(a,b) = \frac{(a+b)!}{a!b!}$$
$$\implies f(a-1,b) = \frac{(a-1+b)!}{(a-1)!b!}, f(a,b-1) = \frac{(a+b-1)!}{a!(b-1)!}$$
$$\implies f(a-1,b) + f(a,b-1) = \frac{(a-1+b)!}{(a-1)!b!} + \frac{(a+b-1)!}{a!(b-1)!}$$
$$\implies f(a,b) = (a+b-1)! \cdot \left(\frac{1}{(a-1)!b!} + \frac{1}{a!(b-1)!} \right)$$
$$\implies f(a,b) = (a+b-1)! \cdot \left(\frac{a+b}{a!b!} \right)$$
$$\implies f(a,b) = \frac{(a+b)!}{a!b!} = \binom{a+b}{a}$$

7.3 FFT

FFT can be used to turn a polynomial multiplication complexity to $O(N \log N)$.

A **convolution** is easily computed by inverting one of the vector and doing the polynomial multiplication normally.

fft-simple.cpp
Description: Computes the product between two polynomials using fft
Time: $O(N \log N)$

```
// #define ld long double
// const ld PI = acos(-1);

struct num{
    ld a {0.0}, b {0.0};
    num() {}
    num(ld na) : a{na} {}
    num(ld na, ld nb) : a{na}, b{nb} {}
    const num operator +(const num &c) const{
        return num(a + c.a, b + c.b);
    }
    const num operator -(const num &c) const{
        return num(a - c.a, b - c.b);
    }
    const num operator *(const num &c) const{
        return num(a*c.a - b*c.b, a*c.b + b*c.a);
    }
    const num operator /(const int &c) const{
        return num(a/c, b/c);
    }
};

void fft(vector<num> &a, bool invert) {
    int n = (int)a.size();
    for(int i=1,j=0;i<n;i++){
        int bit = n>>1;
        for(; j&bit; bit>>=1)
            j^=bit;
        j^=bit;
        if(i<j) swap(a[i], a[j]);
    }
    for(int len = 2; len <= n; len <= 1) {
        ld ang = 2 * PI / len * (invert ? -1 : 1);
        num wlen(cos(ang), sin(ang));
        for(int i=0; i<n; i+=len) {
            num w(1);
```

```
for (int j=0;j<len/2;j++){
    num u = a[i+j], v = a[i+j+len/2] * w;
    a[i+j] = u + v;
    a[i+j+len/2] = u - v;
    w = w * wlen;
}
}
}
if(invert)
    for(num &x: a)
        x = x/n;
}

vector<ll> multiply(vector<int> const& a, vector<int> const& b)
{
    vector<num> fa(a.begin(), a.end());
    vector<num> fb(b.begin(), b.end());
    int n = 1;
    while(n < int(a.size() + b.size()) )
        n <= 1;
    fa.resize(n);
    fb.resize(n);
    fft(fa, false);
    fft(fb, false);
    for(int i=0;i<n;i++)
        fa[i] = fa[i]*fb[i];
    fft(fa, true);
    vector<ll> result(n);
    for(int i=0;i<n;i++)
        result[i] = (ll) round(fa[i].a);
    // while(result.back()==0) result.pop_back();
    return result;
}
```

Number theory (8)

8.1 Sieves

These sieves are used to find all primes up to an upper bound N, 8141 is Eratosthenes
Eratosthenes uses less memory than the linear sieve and is almost as fast

```
eratosthenes.cpp
Description: Optimized sieve of eratosthenes
Time:  $O(N \log \log N)$ 

// O (N log^2(N) ) -> Teorema de Merten
vector<ll> primes {2, 3};
bitset<MAX> sieve; // {sieve[i] == 1} if i is prime
// MAX can be ~1e7

void eratosthenes(ll n){
    sieve.set();
    for(ll i=5, step=2; i<=n; i+=step, step = 6 - step){
        if(sieve[i]){ // i is prime
            primes.pb(i);
            for(ll j= i*i; j<=n; j += 2*i) // sieving all odd multiples of i >= i*i
                sieve[j] = false;
        }
    }
}
```

8.1.2 Linear Sieve

Due to the lp vector, one can compute the factorization of any number very quickly!

Can check primality with $lp[i] == i$

Uses more memory, because lp is a vector of int or ll and not bits.

Proof of time complexity:

We need to prove that the algorithm sets all values $lp[]$ correctly, and that every value will be set exactly once. Hence, the algorithm will have linear runtime, since all the remaining actions of the algorithm, obviously, work for $O(n)$.

Notice that every number i has exactly one representation in form:

$$i = lp[i] \cdot x,$$

where $lp[i]$ is the minimal prime factor of i , and the number x doesn't have any prime factors less than $lp[i]$, i.e.

$$lp[i] \leq lp[x].$$

Now, let's compare this with the actions of our algorithm: in fact, for every x it goes through all prime numbers it could be multiplied by, i.e. all prime numbers up to $lp[x]$ inclusive, in order to get the numbers in the form given above.

Hence, the algorithm will go through every composite number exactly once, setting the correct values $lp[]$ there. Q.E.D.

linear-sieve.cpp
Description: Linear Sieve that iterates every value once (prime) or twice (composite)
Time: $O(N)$

```
vector<ll> primes, lp(MAX);
// lp[i] = smallest prime divisor of i

void linearSieve(ll n) {
    for (ll i=2; i <= n; i++) {
        if (lp[i] == 0) { // i is prime
            lp[i] = i; // {lp[i] == i} for prime numbers
            primes.pb(i);
        }
        // visit every composite number that has primes[j] as the lp
        for (ll j = 0; i * primes[j] <= n; j++) {
            lp[i * primes[j]] = primes[j];

            if (primes[j] == lp[i])
                break;
        }
    }
}
```

8.2 Extended Euclid

Solves the $ax + by = gcd(a, b)$ equation.

8.2.1 Inverse Multiplicative

if $\gcd(a,b) = 1$:

then:

$$ax + by \equiv 1$$

also, if you apply $(\bmod b)$ to the equation:

$$\begin{aligned} ax \pmod b + by \pmod b &\equiv 1 \pmod b \\ ax &\equiv 1 \pmod b \end{aligned}$$

In other words, one can find the inverse multiplicative of any number a in modulo b if $\gcd(a,b) = 1$

8.2.2 Diofantine Equation

$$ax \equiv c \pmod b$$

if $g = \gcd(a,b,c) \neq 1$, divide everything by g .

After this, if $\gcd(a,b) = 1$, find a^{-1} , then multiply both sides of the Diofantine equation.

$$x \equiv c * a^{-1} \pmod b$$

After this, one has simply found x

extended-euclid.cpp

Description: Solves the $a * x + b * y = \gcd(a,b)$ equation

Time: $\mathcal{O}(\log \min(a,b))$

c3a650, 43 lines

```
// equation: a*x + b*y = gcd(a, b)
// input: (a, b)
// returns gcd of (a, b)
// also computes &x and &y, which are passed by reference

11 extendedEuclid(11 a, 11 b, 11 &x, 11 &y) {
    x = 1, y = 0;
    11 x1 = 0, y1 = 1, a1 = a, b1 = b;
    while (b1) {
        11 q = a1 / b1;
        tie(x, x1) = pll{x1, x - q * x1};
        tie(y, y1) = pll{y1, y - q * y1};
        tie(a1, b1) = pll{b1, a1 - q * b1};
    }
    return a1;
}
```

Strings (9)

9.1 Hashing

Hashing consists in generating a Polynomial for the string, therefore, assigning each distint string to a specific numeric value In practice, there will always be some collisions:

Probability of colision: $= \frac{n^2}{2m}$

extended-euclid hashing zfunction

n = Comparissons, m = mod size

when using multiple mods, they multiply: m = m1 * m2

hashing.cpp

Description: Create a numerical value for a string by using polynomial hashing

Time: $\mathcal{O}(n)$ to build, $\mathcal{O}(1)$ per query

c3a650, 43 lines

```
// s[0]*P^n + s[1]*P^(n-1) + ... + s[n]*P^0
// 0-idx
struct Hashing {
    11 n, mod;
    string s;
    vector<11> p, h; // p = P^i, h = accumulated hash sum

    const 11 P = 31; // can be 53

    Hashing(string &s_, 11 m)
        : n(s_.size()), s(s_), mod(m), p(n), h(n) {

        for(11 i=0; i<n; i++)
            p[i] = (i ? P*p[i-1] : 1) % mod;

        for(11 i=0; i<n; i++)
            h[i] = (s[i] + P*(i ? h[i-1] : 0)) % mod;
    }

    11 query(11 l, 11 r) { // [l, r] inclusive (0-idx)
        11 hash = h[r] - (l ? (p[r-l+1]*h[l-1]) % mod : 0);
        return hash < 0 ? hash + mod : hash;
    }
};

// for codeforces:
mt19937 rng(chrono::steady_clock::now().time_since_epoch().count());

int32_t main() { sws;
    vector<11> mods = {
        1000000009,10000000021,10000000033,
        10000000087,10000000093,10000000097,
        1000000103,10000000123,10000000181,
        1000000207,10000000223,10000000241,
        10000000271,10000000289,10000000297
    };

    shuffle(mods.begin(), mods.end(), rng);

    string s; cin >> s;

    Hashing hash(s, mods[0]);
}
```

9.2 Z-Function

Suppose we are given a string s of length n . The Z-function for this string is an array of length n where the i -th element is equal to the greatest number of characters starting from the position i that coincide with the first characters of s (the prefix of s)

The first element of the Z-function, $z[0]$, is generally not well defined. This implementation assumes it as $z[0] = 0$. But it can also be interpreted as $z[0] = n$ (all characters coincide).

Can be used to solve the following simples problems:

- Find all ocurrences of a pattern p in another string s . ($p + '$' + s$) ($z[i] == p.size()$)
- Find all borders. A border of a string is a prefix that is also a suffix of the string but not the whole string. For example, the borders of $ab cab ab cab$ are ab and $ab cab$. ($z[8] = 2, z[5] = 5$) ($z[i] = n-i$)
- Find all period lengths of a string. A period of a string is a prefix that can be used to generate the whole string by repeating the prefix. The last repetition may be partial. For example, the periods of $abc ab ca$ are **abc**, **abc abc** and **abc ab ca**.

It works because $(z[i] + i \leq n)$ is the condition when the common characters of $z[i]$ in addition to the elements already passed, exceeds or is equal to the end of the string. For example:

$abaabab aab \ z[8] = 2$

abaababa is the period; the remaining $(z[i]$ characters) are a prefix of the period; and when all these characters are combined, it can form the string (which has n characters).

zfunction.cpp

Description: For each substring starting at position i , compute the maximum match with the original prefix. $z[0] = 0$

Time: $\mathcal{O}(n)$

14b37c, 12 lines

```
vector<11> z_function(string &s) { // O(n)
    11 n = (11) s.length();
    vector<11> z(n);
    for (11 i=1, l=0, r=0; i<n; i++) {
        if (i <= r) z[i] = min(r - i + 1, z[i - l]);

        while (i + z[i] < n and s[z[i]] == s[i + z[i]]) z[i]++;

        if (r < i + z[i] - 1) l = i, r = i + z[i] - 1;
    }
    return z;
}
```

9.3 KMP

KMP stands for Knuth-Morris-Pratt and computes the prefix function.

You are given a string s of length n . The prefix function for this string is defined as an array π of length n , where $\pi[i]$ is the length of the longest proper prefix of the substring $s[0 \dots i]$ which is also a suffix of this substring. A proper prefix of a string is a prefix that is not equal to the string itself. By definition, $\pi[0] = 0$.

For example, prefix function of string $"abc abcd"$ is $[0,0,0,1,2,3,0]$, and prefix function of string $"aabaab"$ is $[0,1,0,1,2,2,3]$.

kmp.cpp

Description: Computes the prefix function
Time: $\mathcal{O}(n)$

3f2929, 13 lines

```
vector<ll> kmp(string &s) { //  $\mathcal{O}(n)$ 
    ll n = (ll) s.length();
    vector<ll> pi(n, 0); //  $pi[0] = 0$ 
    for (ll i=1; i<n; i++) {
        ll j = pi[i-1];
        while (j > 0 and s[i] != s[j])
            j = pi[j-1];
        if (s[i] == s[j])
            j++;
        pi[i] = j;
    }
    return pi;
}
```

9.3.1 Patterns in a String

Given a string p (pattern) and a string s , we want to find and display the positions of all occurrences of the string p in the string s .

Solution: Concatenate $p + '$' + s$, each position where $pi[i] == p.size() \implies$ a match of the pattern in this substring.

9.4 Suffix Array

The suffix array is the array with size n , whose values are the indexes from the longest substring (0) to the smallest substring (n) after ordering it lexicographically. Example:

Let the given string be "banana".

0	banana	5	a
1	anana	3	ana
2	nana	1	anana
3	ana	0	banana
4	na	4	na
5	a	2	nana

Sort the Suffixes
----->
alphabetically

So the suffix array for "banana" is {5, 3, 1, 0, 4, 2}

Note that the length of the string i is: $(s.size())-sa[i]$

suffix-array.cpp

Description: Creates the Suffix Array
Time: $\mathcal{O}(N \log N)$

49608b, 20 lines

```
vector<ll> suffixArray(string s) {
    s += "!";
    ll n = s.size(), N = max(n, 260LL);
    vector<ll> sa(n), ra(n);
    for (ll i = 0; i < n; i++) sa[i] = i, ra[i] = s[i];

    for (ll k = 0; k < n; k ? k *= 2 : k++) {
        vector<ll> nsa(sa), nra(n), cnt(N);

        for (ll i = 0; i < n; i++) nsa[i] = (nsa[i]-k+n)%n, cnt[ra[i]]++;
        for (ll i = 1; i < N; i++) cnt[i] += cnt[i-1];
        for (ll i = n-1; i+1; i--) sa[--cnt[ra[nsa[i]]]] = nsa[i];

        for (ll i = 1, r = 0; i < n; i++) nra[sa[i]] = r += ra[sa[i]] !=
```

```
        ra[sa[i-1]] or ra[(sa[i]+k)%n] != ra[(sa[i-1]+k)%n]
    };
    ra = nra;
    if (ra[sa[n-1]] == n-1) break;
}
return vector<ll>(sa.begin()+1, sa.end());
}
```

kasai.cpp
Description: Creates the Longest Common Prefix array (LCP)
Time: $\mathcal{O}(N \log N)$

913195, 13 lines

```
vector<ll> kasai(string s, vector<ll> sa) {
    ll n = s.size(), k = 0;
    vector<ll> ra(n), lcp(n);
    for (ll i = 0; i < n; i++) ra[sa[i]] = i;

    for (ll i = 0; i < n; i++, k -= !k) {
        if (ra[i] == n-1) { k = 0; continue; }
        ll j = sa[ra[i]+1];
        while (i+k < n and j+k < n and s[i+k] == s[j+k]) k++;
        lcp[ra[i]] = k;
    }
    return lcp;
}
```

Problems that can be solved:

Numbers of Distinct Substrings:

- $\frac{n(n+1)}{2} - lcp[i]$ (for all i)

Longest Repeated Substring:

- biggest $lcp[i]$. The position can be found in $sa[i]$

Find how many distinct substrings there are for each len in $[1:n]$:

- Use delta encoding and the fact that $lcp[i]$ counts the repeated substring between $s.substr(sa[i])$ and $s.substr(sa[i+1])$, which are the substrings corresponding to the common prefix.

Find the k -th distinct substring:

```
string s; cin >> s;
ll n = s.size();

auto sa = suffix_array(s);
auto lcp = kasai(s, sa);

ll k; cin >> k;

for (ll i=0; i<n; i++) {
    ll len = n-sa[i];
    if (k <= len) {
        cout << s.substr(sa[i], k) << endl;
        break;
    }
    k -= lcp[i] - len;
}
```

9.5 Manacher

Manacher's Algorithm is used to find all palindromes in a string.

For each substring, centered at i , find the longest palindrome that can be formed.

Works best for odd size string, so we convert all string to odd ones by adding and extra characters between the original ones

Therefore, the value stored in the vector cnt is actually $palindrome-len + 1$.

manacher.cpp

Description: Covert String to odd length to use manacher, which computes all the maximum lengths of all palindromes in the given string
Time: $\mathcal{O}(2n)$

0c2a2b, 46 lines

```
struct Manacher {
    string s, t;
    vector<ll> cnt;

    // t is the transformed string of s, with odd size
    Manacher(string &s_) : s(s_) {
        t = "#";
        for (auto c : s) {
            t += c, t += "#";
        }
        count();

        // perform manacher on the odd string
        // cnt will give all the palindromes centered in i
        // for the odd string t
        void count() {
            ll n = t.size();
            string aux = "$" + t + "^";
            vector<ll> p(n + 2);
            ll l = 1, r = 1;
            for (ll i = 1; i <= n; i++) {
                p[i] = max(0LL, min(r - i, p[l + (r - i)]));
                while (aux[i - p[i]] == aux[i + p[i]]) {
                    p[i]++;
                }
                if (i + p[i] > r) {
                    l = i - p[i], r = i + p[i];
                }
            }
            cnt = vector<ll>(p.begin() + 1, p.end() - 1);
        }

        // compute a longest palindrome present in s
        string getLongest() {
            ll len = 0, pos = 0;
            for (ll i=0; i<(ll)t.size(); i++) {
                ll sz = cnt[i]-1;
                if (sz > len) {
                    len = sz;
                    pos = i;
                }
            }
            return s.substr(pos/2 - len/2, len);
        }
    };
};
```

9.6 Booth

An efficient algorithm which uses a modified version of KMP to compute the least amount of rotation needed to reach the **lexicographically minimal string rotation**.

A rotation of a string can be generated by moving characters one after another from beginning to end. For example, the rotations of *acab* are *acab*, *caba*, *abac*, and *baca*.

booth.cpp

Description: Use a modified version of KMP to find the lexicographically minimal string rotation

Time: $\mathcal{O}(n)$

64184b, 30 lines

```
// Booth Algorithm
ll least_rotation(string &s) { // O(n)
    ll n = s.length();
    vector<ll> f(2*n, -1);
    ll k = 0;
    for(ll j=1; j<2*n; j++) {
        ll i = f[j-k-1];
        while(i != -1 and s[j % n] != s[(k+i+1) % n] ) {
            if (s[j % n] < s[(k+i+1) % n])
                k = j - i - 1;
            i = f[i];
        }
        if (i == -1 and s[j % n] != s[(k+i+1) % n] ) {
            if (s[j % n] < s[(k+i+1) % n])
                k = j;
            f[j - k] = -1;
        }
        else
            f[j - k] = i + 1;
    }
    return k;
}

int32_t main(){ sws;
    string s; cin >> s;
    ll n = s.length();
    ll ans_idx = least_rotation(s);
    string tmp = s + s;
    cout << tmp.substr(ans_idx, n) << endl;
}
```

9.7 Suffix Automaton

The goat!!!

The implementation can be changed to use a fixed vector for adjacent edges instead of a map. This will reduce the time complexity to $\mathcal{O}(n)$ and the memory to $\mathcal{O}(nk)$.

suffix-automaton.cpp

Description: Suffix automaton, each node represents a set of end-pos equivalent substrings. Solves A LOT of tasks!

Time: $\mathcal{O}(n\log k)$, $n = s.size()$, $k = \text{characters used}$

12ef97, 86 lines

```
struct SuffixAutomaton {
    struct State {
        ll len = 0, link = 0; // link = the state id connected
                               // by the uplink
        map<char, ll> down = {}; // ids of connected states
                               // below
    };

    ll n = 1; // number of states
```

booth suffix-automaton random ternary-search

```
vector<State> ton; // short for automaton :D
string s;

SuffixAutomaton(string ss) : s(ss) {
    ton.pb( {0, -1} ); // root = 0
    for(auto c : s) add(c);
}

ll last = 0; // last state's id
void add(char c) {
    ton.pb( {ton[last].len+1} );
    ll cur = n++;

    ll p = last;
    while (p != -1 and !ton[p].down.count(c)) {
        ton[p].down[c] = cur;
        p = ton[p].link;
    }

    if (p != -1) {
        ll q = ton[p].down[c];
        if (ton[p].len + 1 == ton[q].len) {
            ton[cur].link = q;
        }
        else {
            ton.pb(ton[q]);
            ll clone = n++;
            ton[clone].len = ton[p].len + 1;

            while (p != -1 and ton[p].down[c] == q) {
                ton[p].down[c] = clone;
                p = ton[p].link;
            }
            ton[cur].link = ton[q].link = clone;
        }
    }
    last = cur;
}

// s2. find the lexicographically k-th substring
// The k-th substring corresponds to the lexicographically
// k-th path in the suffix automaton

// Additionally, by creating the automaton on the
// duplicated string (S+S),
// the k-th substring with k = s.size(), will give us the
// Smallest cyclic shift (Minimal Rotation)
string substring(ll k) { // O(V+E) = O(2sz+ 3sz) = O(5sz),
    sz = s.size()
    string ans = ""; // {k = 0} will return the empty
    string ""
    ll idx = 0;

    // iterative dfs to avoid stack overflow
    vector<bool> vis(n, 0);
    stack<pair<ll, char>, vector<pair<ll, char>>>> st;
    st.push({0, 0}); // root

    while(st.size()) {
        auto [u, concat] = st.top();

        if (vis[u]) { // pop command
            ans.pop_back();
            st.pop();
            continue;
        }
        vis[u] = true;

        if (concat != 0) {
```

```
            ans += concat; idx++;
            if (idx == k) break;
        }

        auto edges = ton[u].down;
        for(auto itr = edges.rbegin(); itr != edges.rend();
            itr++) {
            auto [c, v] = *itr;
            st.push({v, c});
        }
    }

    return ans;
}

};
```

Miscellaneous (10)

10.1 Random Generator

random.cpp

Description: Good randomizer to generate int in a range or shuffle vectors

Time: $\mathcal{O}(1)$ for randint, $\mathcal{O}(n\log(n))$ for shuffle

55c5b9, 13 lines

```
mt19937 rng(chrono::steady_clock::now().time_since_epoch().
    count());

// or for 64 bits
mt19937_64 rng(chrono::steady_clock::now().time_since_epoch().
    count());

// to shuffle a vector
vector<int> vec;
shuffle(vec.begin(), vec.end(), rng);

// to limit the number to the range [l, r]
int randint(int l, int r) {
    return (rng() % (r-l+1)) + l;
}
```

10.2 Read an Fraction Input

```
char c;
ll num, den;
cin >> num >> c >> den;
```

10.3 Ternary Search

ternary-search.cpp

Description: Computes the min/max for a function that is monotonically increasing then decreasing or decreasing then increasing.

Time: $\mathcal{O}(N \log N_3)$

c3a5d7, 48 lines

```
/*
Float and Min Version: Requires EPS (precision usually defined
in the question text)
*/

ld f(ld d){
    // function here
}

// for min value
ld ternary_search(ld l, ld r){
    while(r - l > EPS){
        // divide into 3 equal parts and eliminate one side
        ld m1 = l + (r - l) / 3;
        ld m2 = r - (r - l) / 3;
        if (f(m1) < f(m2)){
            r = m2;
```

```
        }
        else {
            l = m1;
        }
    }
    return f(l); // check here for min/max
}

/*
Integer and Max Version:
*/

ll f(ll idx) {
    // function here
}

// for max value, using integer idx
ll ternary_search(ll l, ll r) {
    while(l <= r) {
        // divide into 3 equal parts and eliminate one side
        ll m1 = l + (r-l)/3;
        ll m2 = r - (r-l)/3;
        if(f(m1) < f(m2)) {
            l = m1+1;
        }
        else {
            r = m2-1;
        }
    }
    return f(l); // check here for min/max
}
```

Techniques (A)

techniques.txt	160 lines
Recursion	
Divide and conquer	
Finding interesting points in N log N	
Algorithm analysis	
Master theorem	
Amortized time complexity	
Greedy algorithm	
Scheduling	
Max contiguous subvector sum	
Invariants	
Huffman encoding	
Graph theory	
Transform edges into vertices, duplicating the nodes of the graph	
Dynamic graphs (extra book-keeping)	
Breadth first search	
Depth first search	
* Normal trees / DFS trees	
Dijkstra's algorithm	
MST: Prim's algorithm	
Bellman-Ford	
Konig's theorem and vertex cover	
Min-cost max flow	
Lovasz toggle	
Matrix tree theorem	
Maximal matching, general graphs	
Hopcroft-Karp	
Hall's marriage theorem	
Graphical sequences	
Floyd-Warshall	
Euler cycles	
Flow networks	
* Augmenting paths	
* Edmonds-Karp	
Bipartite matching	
Min. path cover	
Topological sorting	
Strongly connected components	
2-SAT	
Cut vertices, cut-edges and biconnected components	
Edge coloring	
* Trees	
Vertex coloring	
* Bipartite graphs (=> trees)	
* 3^n (special case of set cover)	
Diameter and centroid	
K'th shortest path	
Shortest cycle	
Dynamic programming	
Knapsack	
Coin change	
Longest common subsequence	
Longest increasing subsequence	
Number of paths in a dag	
Shortest path in a dag	
Dynprog over intervals	
Dynprog over subsets	
Dynprog over probabilities	
Dynprog over trees	
3^n set cover	
Divide and conquer	
Knuth optimization	
Convex hull optimizations	
RMQ (sparse table a.k.a 2^k-jumps)	
Bitonic cycle	

Log partitioning (loop over most restricted)
Combinatorics
Computation of binomial coefficients
Pigeon-hole principle
Inclusion/exclusion
Catalan number
Pick's theorem
Number theory
Integer parts
Divisibility
Euclidean algorithm
Modular arithmetic
* Modular multiplication
* Modular inverses
* Modular exponentiation by squaring
Chinese remainder theorem
Fermat's little theorem
Euler's theorem
Phi function
Frobenius number
Quadratic reciprocity
Pollard-Rho
Miller-Rabin
Hensel lifting
Vieta root jumping
Game theory
Combinatorial games
Game trees
Mini-max
Nim
Games on graphs
Games on graphs with loops
Grundy numbers
Bipartite games without repetition
General games without repetition
Alpha-beta pruning
Probability theory
Optimization
Binary search
Ternary search
Unimodality and convex functions
Binary search on derivative
Numerical methods
Numeric integration
Newton's method
Root-finding with binary/ternary search
Golden section search
Matrices
Gaussian elimination
Exponentiation by squaring
Sorting
Radix sort
Geometry
Coordinates and vectors
* Cross product
* Scalar product
Convex hull
Polygon cut
Closest pair
Coordinate-compression
Quadtrees
KD-trees
All segment-segment intersection
Sweeping
Discretization (convert to events and sweep)
Angle sweeping
Line sweeping
Discrete second derivatives
Strings

Longest common substring
Palindrome subsequences
Knuth-Morris-Pratt
Tries
Rolling polynomial hashes
Suffix array
Suffix tree
Aho-Corasick
Manacher's algorithm
Letter position lists
Combinatorial search
Meet in the middle
Brute-force with pruning
Best-first (A*)
Bidirectional search
Iterative deepening DFS / A*
Data structures
LCA (2^k-jumps in trees in general)
Pull/push-technique on trees
Heavy-light decomposition
Centroid decomposition
Lazy propagation
Self-balancing trees
Convex hull trick (wcipeg.com/wiki/Convex_hull_trick)
Monotone queues / monotone stacks / sliding queues
Sliding queue using 2 stacks
Persistent segment tree