

3.3 Distance Between Locations

Manual of Applied Spatial Ecology

3/11/2022

Determining the distance between locations or between locations and respective habitat types can serve a variety of purposes. Several resource selection procedures require a description of the daily movement distance of an animal to determine the habitat available to an animal or when generating random locations around known locations. We will start here with a method to determine the average distance moved by mule deer in Colorado in a study to determine methods to alleviate degradation on sunflowers that have become a high commodity crop in the area.

1. Exercise 3.3 - Download and extract zip folder into your preferred location
2. Set working directory to the extracted folder in R under Session - Set Working Directory...
3. Now open the script "DistanceUniqueBurst.Rmd" and run code directly from the script
4. First we need to load the packages needed for the exercise

```
library(adehabitatLT)
library(chron)
library(class)
```

5. Code to read in dataset then subset for an individual animal

```
muleys <- read.csv("DCmuleysedited.csv", header=T)
#Code to select an individual animal
muley15 <- subset(muleys, id=="D15")
table(muley15$id)
```

```
##
## D15
## 2589
```

```
#Sort data to address error in code and then look at first 20 records of data to confirm
muley15 <- muley15[order(muley15$GPSFixTime),]
#Run code to display the first 20 records to look at what sorting did to data
```

6. Prepare data to create trajectories using the lttraj command in Adehabitat LT

```
#####
## Example of a trajectory of type II (time recorded) with conversion of the date to the
## format POSIX that nNeeds to be done to get proper digits of date into R then POSIXct uses
## library(chron)
da <- as.character(muley15$GPSFixTime)
da <- as.POSIXct(strptime(muley15$GPSFixTime, format="%Y.%m.%d %H:%M:%S"))
head(da)

## [1] "2011-10-12 00:02:03 EDT" "2011-10-12 03:00:52 EDT"
## [3] "2011-10-12 06:00:52 EDT" "2011-10-12 09:00:38 EDT"
## [5] "2011-10-12 12:00:34 EDT" "2011-10-12 15:00:42 EDT"
```

```

#Attach da to muley15
muley15$da <- da

timediff <- diff(muley15$da)
muley15 <-muley15[-1,]
muley15$timediff <-as.numeric(abs(timediff))

#Clean up muley15 for outliers
newmuleys <-subset(muley15, muley15$X > 599000 & muley15$X < 705000 & muley15$Y > 4167000
                  & muley15$timediff < 14401)
muley15 <- newmuleys

```

7. Create a spatial data frame of locations for muley 15 for use in creating trajectories that includes time difference between locations and dates in proper format (as.POSIXct)

```

data.xy = muley15[c("X","Y")]
#Creates class Spatial Points for all locations
xyssp <- SpatialPoints(data.xy)
proj4string(xyssp) <- CRS("+proj=utm +zone=12 +ellps=WGS84")

```

```


## Warning in showSRID(uprojargs, format = "PROJ", multiline = "NO", prefer_proj
## = prefer_proj): Discarded datum Unknown based on WGS84 ellipsoid in Proj4
## definition

```

```


#Creates a Spatial Data Frame from
sppt<-data.frame(xyssp)
#Creates a spatial data frame of ID
idsp<-data.frame(muley15[2])
#Creates a spatial data frame of dt
dtsp<-data.frame(muley15[24])
#Creates a spatial data frame of Burst
busp<-data.frame(muley15[23])
#Merges ID and Date into the same spatial data frame
merge<-data.frame(idsp,dtsp,busp)
#Adds ID and Date data frame with locations data frame
coordinates(merge)<-sppt
plot(merge)

```

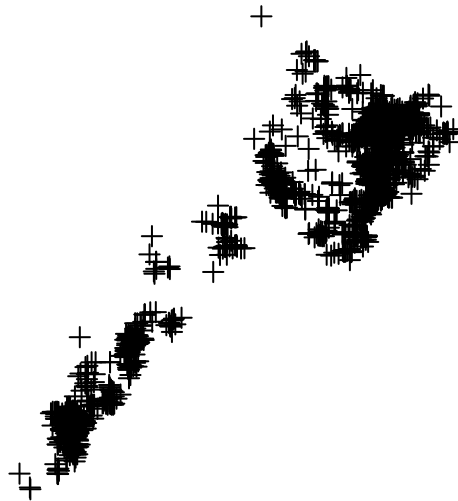

8. Create an object of class “ltraj” for muley15 dataset

```
ltraj <- as.ltraj(coordinates(merge),merge$da,id=merge$id)  
plot(ltraj)
```

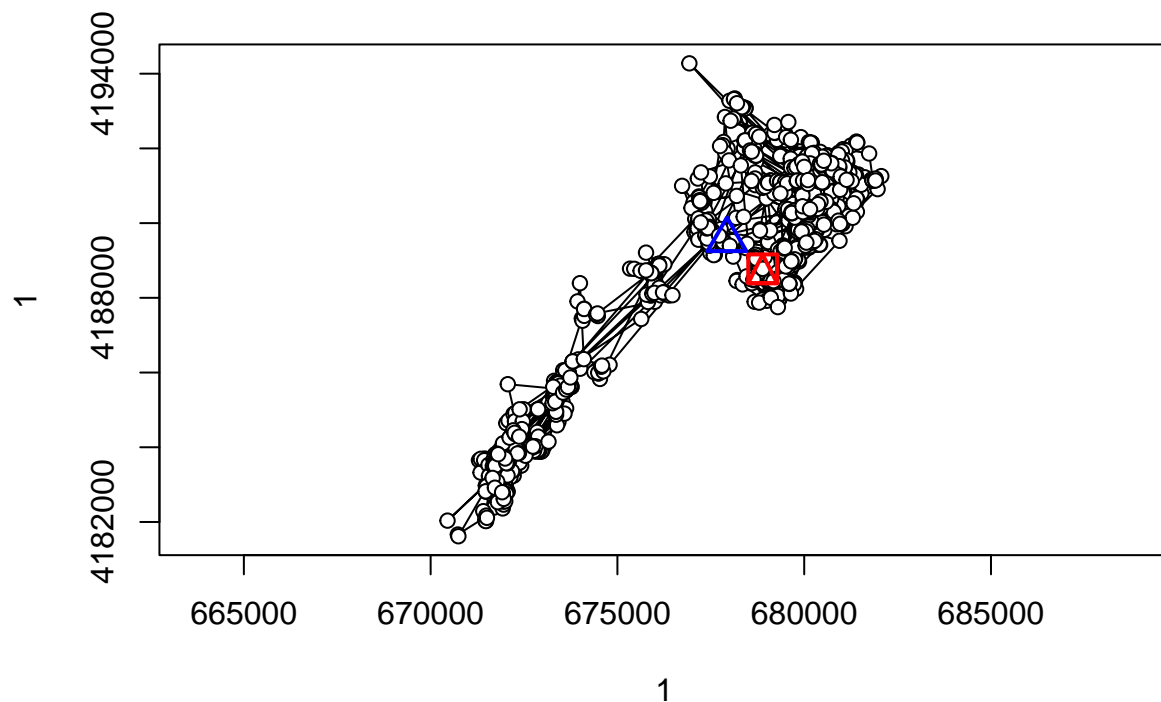

```
ltraj
```

```
##
## ***** List of class ltraj *****
##
## Type of the traject: Type II (time recorded)
## * Time zone unspecified: dates printed in user time zone *
## Irregular traject. Variable time lag between two locs
##
## Characteristics of the bursts:
##   id burst nb.reloc NAs      date.begin      date.end
## 1 D15   D15      2588   0 2011-10-12 03:00:52 2012-08-31 09:00:51
##
##
## infolocs provided. The following variables are available:
## [1] "pkey"
```

```
#Now let's look at time differences between locations before moving forward
summary(muley15$timediff)
```

```
##   Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 1.998  2.998   3.000   3.008   3.002   6.004
```

9. Need to create separate “bursts” for each trajectory based on the number of locations collected each day. In our case it was 8 (i.e., locations collected every 3 hours during a 24-hour period).

```
#We want to study the trajectory of the day at the scale of the day. We define one trajectory
#per day. The trajectory should begin at 2200 hours so the following function returns TRUE if
```

```

#the date is time between 06H00 and 23H00 (i.e. results in 7-8 locations/day bursts)
foo <- function(date) {
  da <- as.POSIXlt(date)
  ho <- da$hour + da$min
  return(ho>15.9&ho<23.9)
}
deer <- cutltraj(ltraj, "foo(date)", nextr = TRUE)

```

```

## Warning in cutltraj(ltraj, "foo(date)", nextr = TRUE): At least 3 relocations are needed for a burst
## 345 relocations have been deleted

```

```

#Notice that the above code will remove 328 relocations that fall
#outside of your time criteria
#Warning message:
#In cutltraj(ltraj, "foo(date)", nextr = TRUE) :
# At least 3 relocations are needed for a burst
# 328 relocations have been deleted
head(deer)

```

```

##
## ***** List of class ltraj *****
##
## Type of the trajet: Type II (time recorded)
## * Time zone unspecified: dates printed in user time zone *
## Irregular trajet. Variable time lag between two locs
##
## Characteristics of the bursts:
##   id   burst nb.reloc NAs          date.begin          date.end
## 1 D15 D15.001      6   0 2011-10-12 03:00:52 2011-10-12 18:00:52
## 2 D15 D15.003      7   0 2011-10-13 00:00:35 2011-10-13 18:00:35
## 3 D15 D15.005      7   0 2011-10-14 00:00:42 2011-10-14 18:00:42
## 4 D15 D15.007      7   0 2011-10-15 00:00:35 2011-10-15 18:00:45
## 5 D15 D15.009      7   0 2011-10-16 00:00:39 2011-10-16 18:00:49
## 6 D15 D15.011      6   0 2011-10-17 00:01:07 2011-10-17 15:01:03
##
##
## infolocs provided. The following variables are available:
## [1] "pkey"

```

10. Code to change ltraj to a data.frame to summarize distance between locations for each daily burst

```

dfdeer <- ld(deer)
head(dfdeer)

#Code to get mean distance moved for each burst
dfdeer <- subset(dfdeer, !is.na(dfdeer$dist))#remove NAs from last location of a burst
mean_dist <- do.call(data.frame, aggregate(dfdeer$dist, by=list(dfdeer$burst),
  function(x) c(mean = mean(x), sd = sd(x), n=abs(length(x)))))
head(mean_dist)
#Write.table gives csv output of Summary
write.table(mean_dist, file = "Distance.csv", sep = ",", row.names = TRUE,
  col.names = TRUE, qmethod = "double")

```