

## LoggerAppsMsg()

### Synopsis

```
int  LoggerAppsMsg(devProd, message_group, severity, message_string, ... )
int  devProd;
int  message_group;
int  severity;
char *message_string;
```

### Description


LoggerAppsMsg() decomposes argument parameters into id=value pairs, validates for errors, encode to reduce storage capacity, and securely protects to ensure confidentiality, integrity, and authenticity.<sup>1</sup>

### Example Usage

```
LoggerAppsMsg(1,100,3,"Message that generates 1 string and 2 integers [%s],
[%d] and [%d]","String Argument", 98,99);
```

Generates formatted output log message:

```
02/09/2026 12:01:55 [3650:sample_program] [DATABASE] [INFORM] Message that
generates 1 string and 2 integers [String Argument], [98] and [99]
```

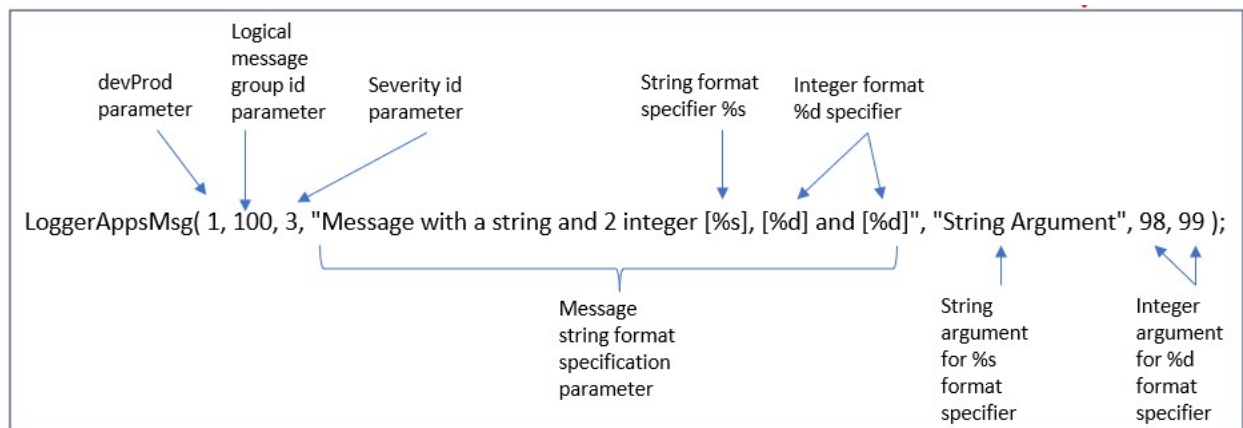

The devProd integer parameter must be 1 or 2, where 1 means generate unprotected log messages.<sup>2</sup>

The logical message\_group integer parameter is the id part of the id=value pairs defined in file LoggerMessageDefines.txt. The id part of 100 is translated and mapped to the corresponding value part of DATABASE in the output message. [Refer to the LoggerMessageDefines.txt document](#) for further details.

The severity integer parameter is the id part of the id=value pairs defined in file LoggerMessageDefines.txt. The id part of 3 is translated and mapped to the corresponding value part of INFORM in the output message. [Refer to the LoggerMessageDefines.txt document](#) for further details.

The message\_string format string specification parameter is a C-Programming Language printf() style format string specification that comprises of format string text and format specifiers.

<sup>1</sup> The Free Version supports decompose and validate format string specification and string argument parameters.

<sup>2</sup> The Free Version supports devProd option 1 only.

The reminder of the `LoggerAppsMsg()` parameters (as indicated by "...") are the corresponding format string specifiers argument values for `message_string`.

NOTE: Refer to the [Wandi-SASL Capabilities section Adjustable Parameters](#) for validation guidelines used by `LoggerAppsMsg()` to check and validate parameters.

`LoggerAppsMsg()` returns 0 on success and -1 on error.

This API function is failed safe which means when an error occurs the application can continue processing.

### **Error Codes**

Error codes are written to the following files, where the `<cpid>` is the application process id number:

- `/tmp/<cpid>-LoggerAppsMessage.txt`
- `$LOGGER_HOME_PATH/LoggerOutput/<cpid>-LoggerAppsMessage.txt`

|               |                                                                |
|---------------|----------------------------------------------------------------|
| 135           | Invalid log env <code>LOGGER_HOME_PATH</code> parameter.       |
| 136           | Invalid logical message grouping and/or severity id parameter. |
| 137           | Invalid format message string text.                            |
| 138           | Too many format string specifiers.                             |
| 139           | String argument pointer parameter is NULL.                     |
| 140           | String argument pointer is negative.                           |
| 141           | String argument not properly NULL terminated.                  |
| 142           | String argument exceeded allowed length.                       |
| 143           | Invalid string argument.                                       |
| 1018          | Invalid format string specifier type.                          |
| 115, 116, 117 | Invalid message text format string.                            |
| 104, 106      | Invalid character in message text string or string argument.   |
| 105           | String argument length is zero.                                |