Input × history conditions in BankSim

Fixed C07, seed 42 | Retrospective development


Whole window: P = 2,160; K = 5,950

a Detection performance by input and history condition

Direct merchant input	Hnone	H7	Horig
M-off (absent)	**TP = 1,905** Recall 88.1944% Uncaptured frauds: 255	**TP = 2,100** Recall 97.2222% Uncaptured frauds: 60	**TP = 2,109** Recall 97.6389% Uncaptured frauds: 51
M-on (present)	**TP = 2,113** Recall 97.8241% Uncaptured frauds: 47	**TP = 2,109** Recall 97.6389% Uncaptured frauds: 51	**TP = 2,112** Recall 97.7778% Uncaptured frauds: 48

b Difference of history increments

J = (TP[Horig] - TP[H7])M-on - (TP[Horig] - TP[H7])M-off; I = 100J/P (pp)

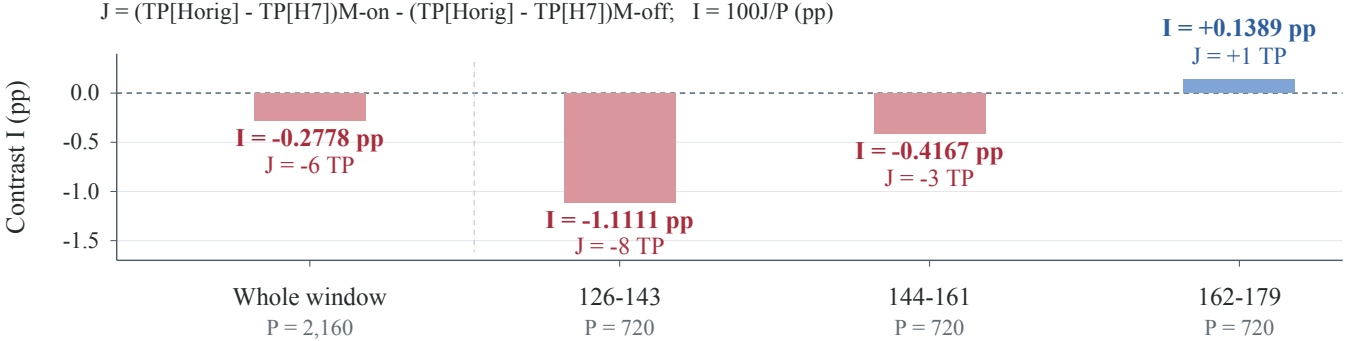

Single fits; no inferential intervals. M-off retains merchant as the history key.

Segment budgets are local and do not decompose the whole-window selection.