

(a) Prefill: packed requests

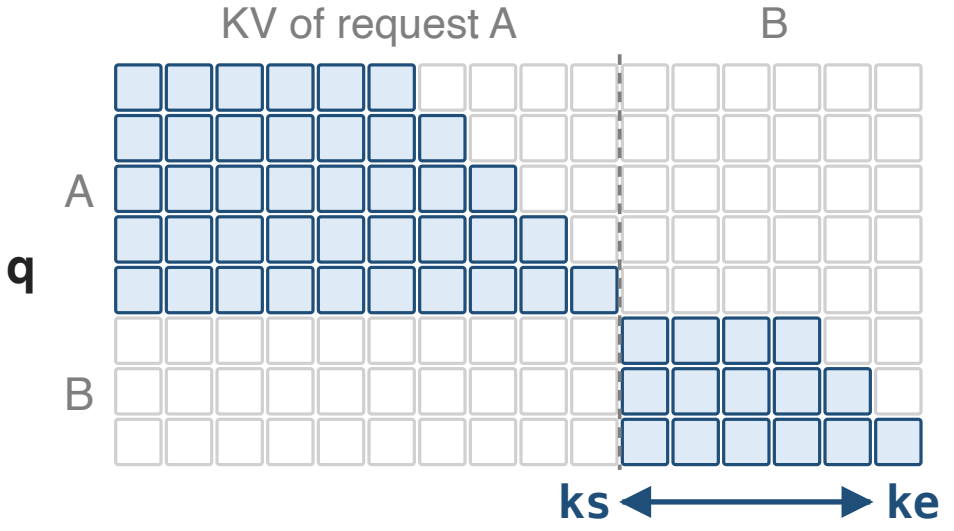

one [ks, ke) range per query row

`fp8_mqa_logits`

(b) Decode: paged KV cache

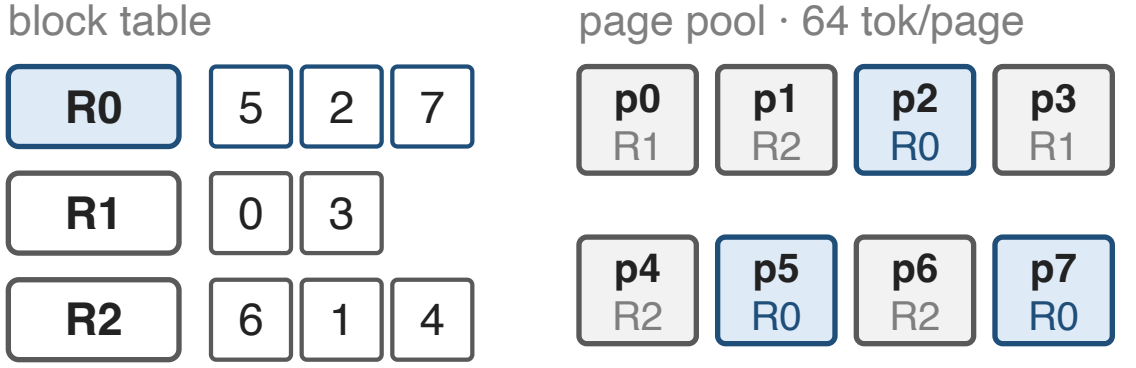

new token(s) of each request

pages located via block table

`fp8_paged_mqa_logits`