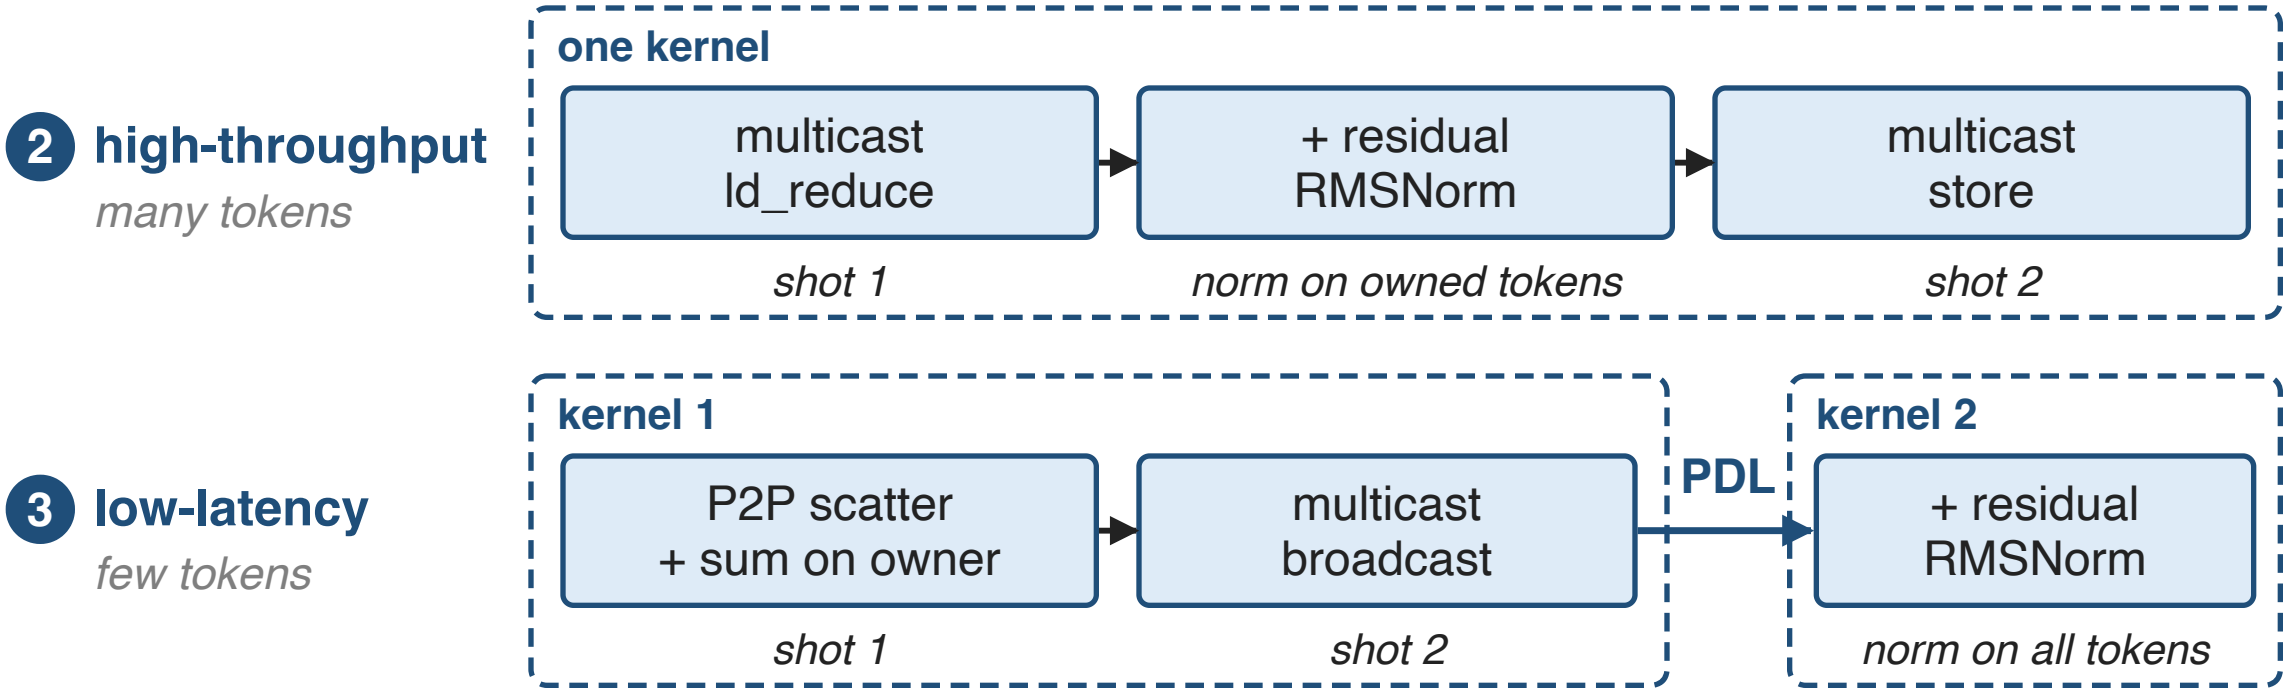

2
high-throughput
many tokens
one kernel
multicast
ld_reduce
+ residual
RMSNorm
multicast
store
shot 1
norm on owned tokens
shot 2
3
low-latency
few tokens
kernel 1
P2P scatter
+ sum on owner
multicast
broadcast
PDL
kernel 2
+ residual
RMSNorm
shot 1
shot 2
norm on all tokens