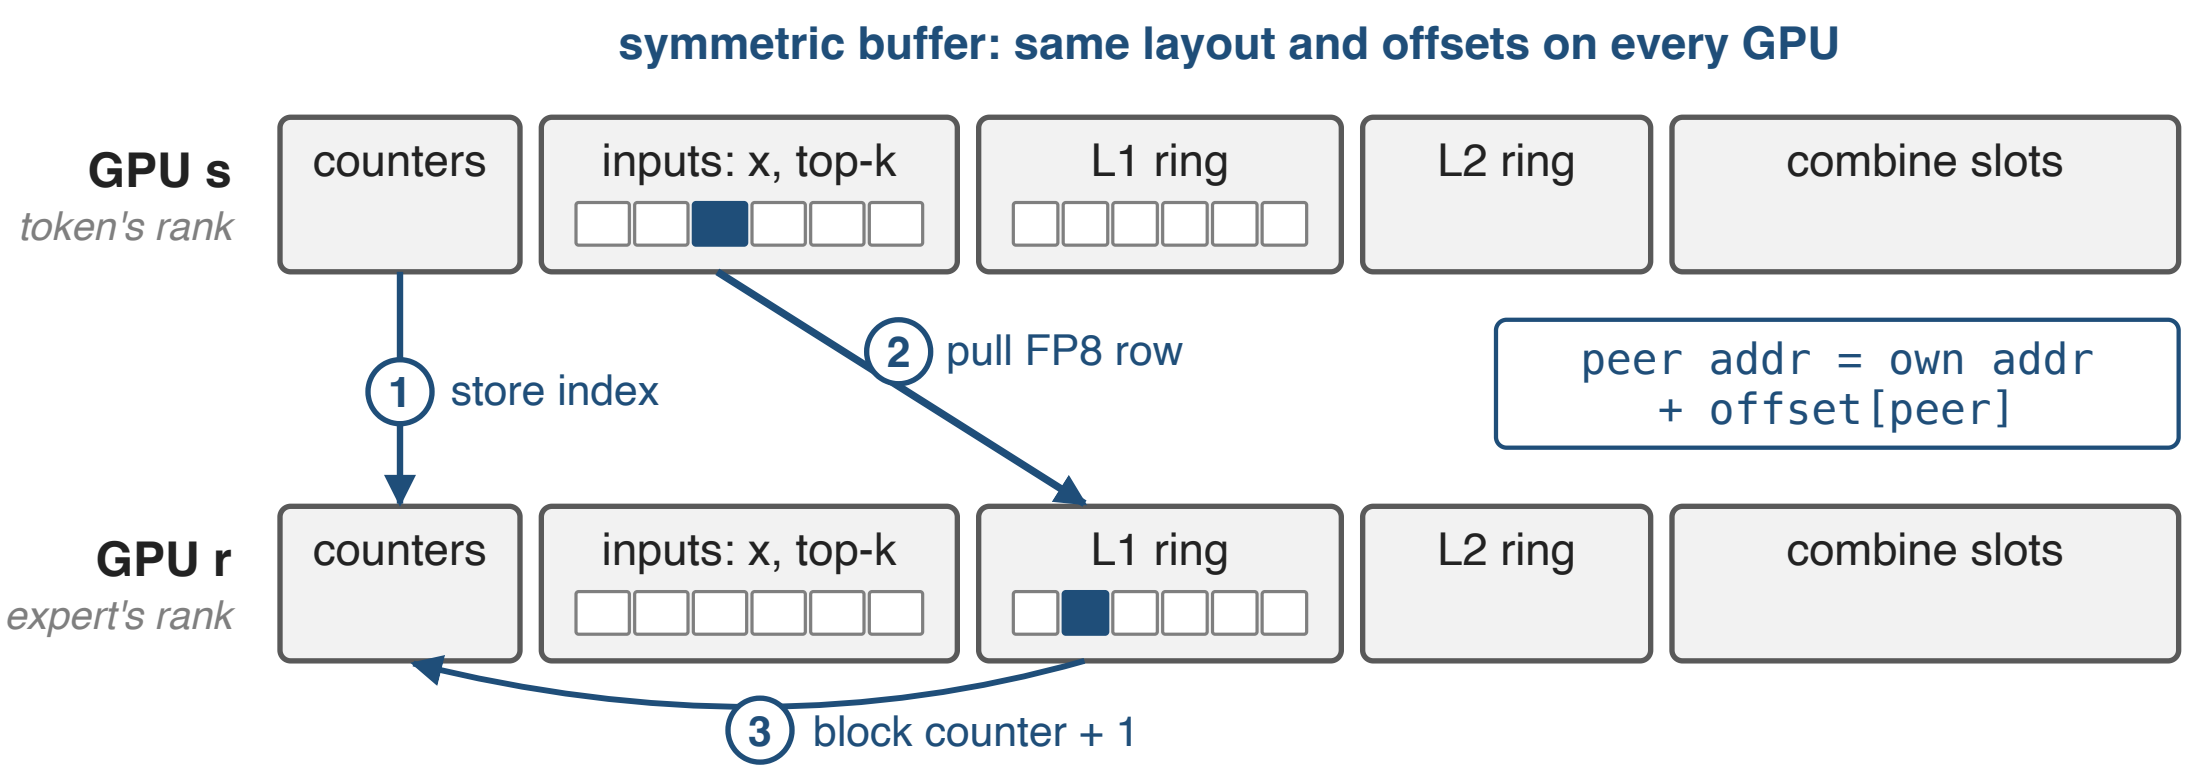

symmetric buffer: same layout and offsets on every GPU
GPU s
token's rank
counters
inputs: x, top-k
L1 ring
L2 ring
combine slots
1 store index
2 pull FP8 row
peer addr = own addr
+ offset[peer]
GPU r
expert's rank
counters
inputs: x, top-k
L1 ring
L2 ring
combine slots
3 block counter + 1