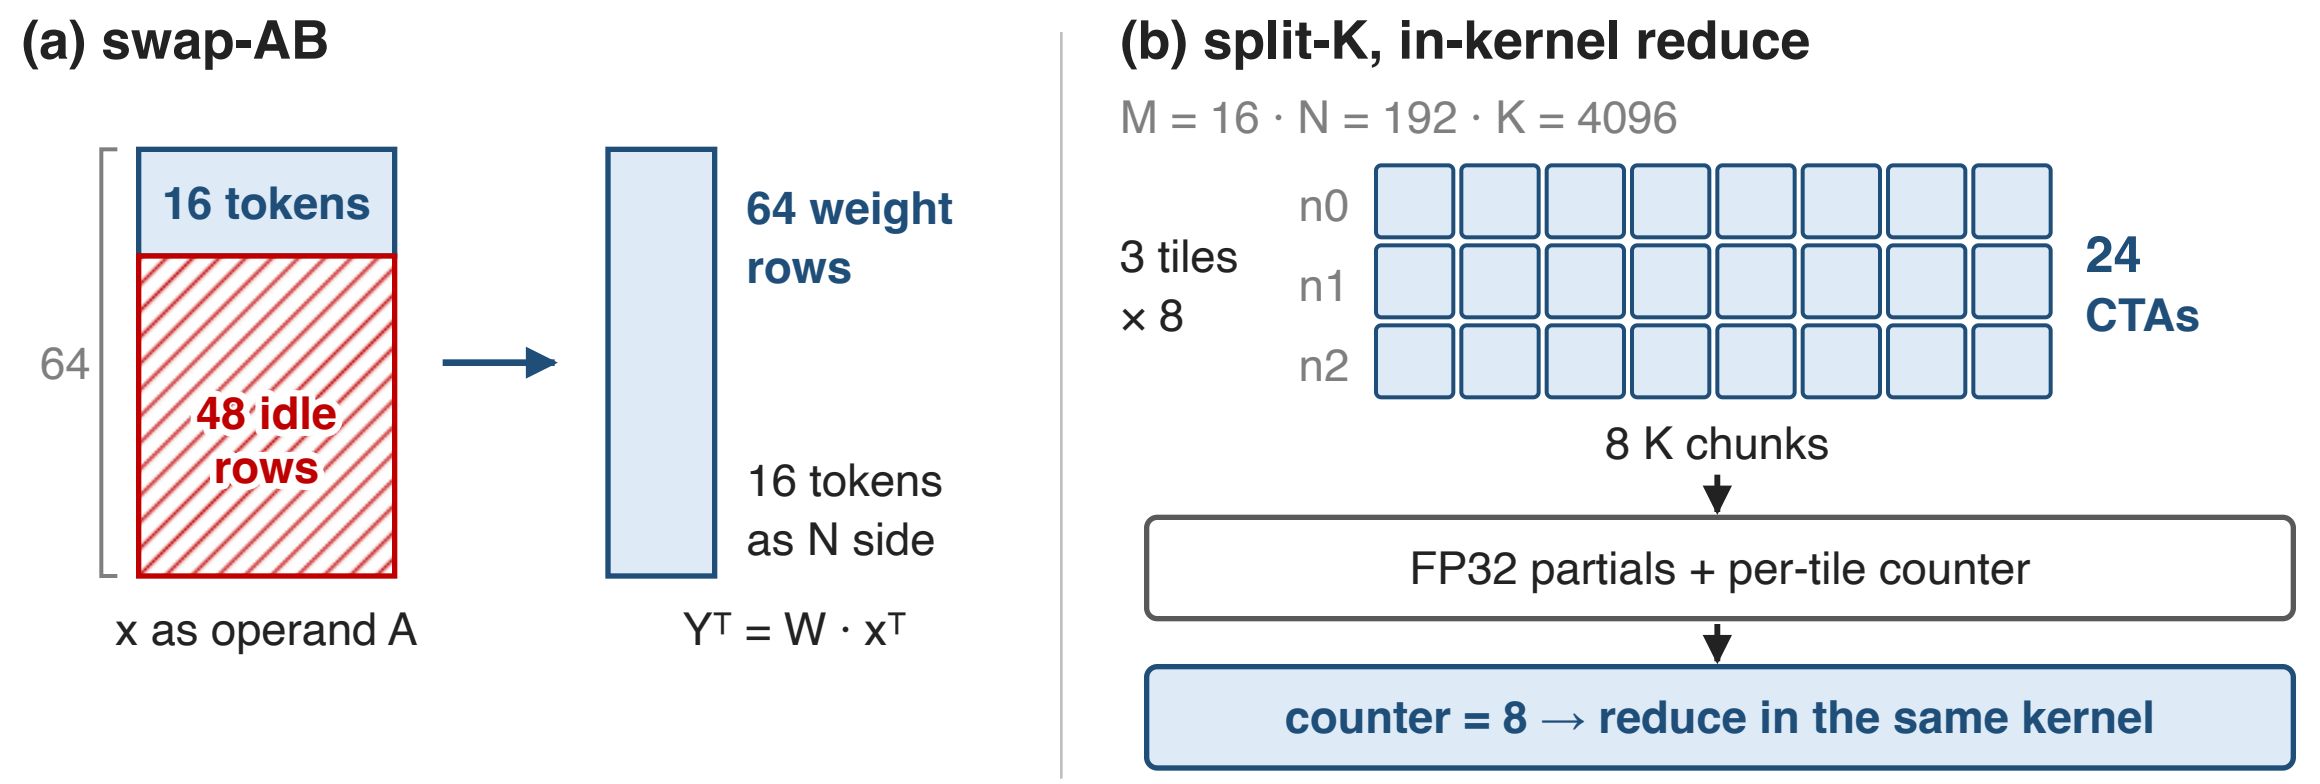

(a) swap-AB
16 tokens
64
48 idle rows
64 weight rows
16 tokens as N side
x as operand A
$Y^T = W \cdot x^T$
(b) split-K, in-kernel reduce
M = 16 · N = 192 · K = 4096
3 tiles × 8
n0
n1
n2
24 CTAs
8 K chunks
FP32 partials + per-tile counter
counter = 8 → reduce in the same kernel