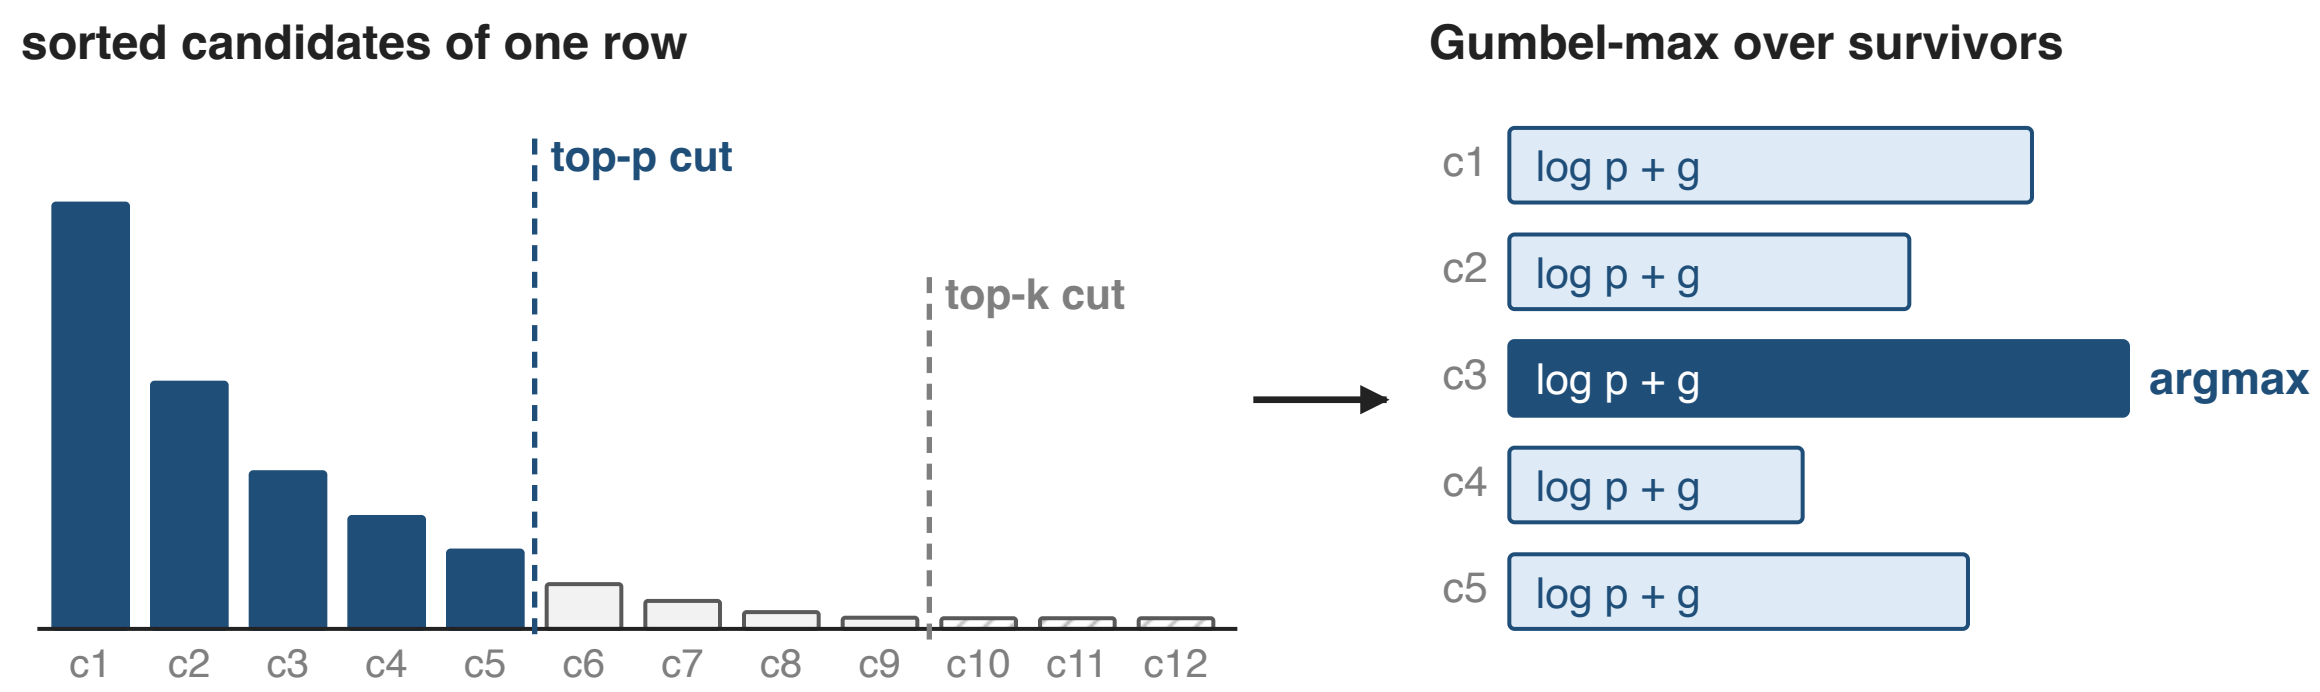

sorted candidates of one row
top-p cut
top-k cut
c1
c2
c3
c4
c5
c6
c7
c8
c9
c10
c11
c12
Gumbel-max over survivors
c1
log p + g
c2
log p + g
c3
log p + g
argmax
c4
log p + g
c5
log p + g
softmax over the top-k · prefix sum by warp scan
g = Gumbel noise per candidate