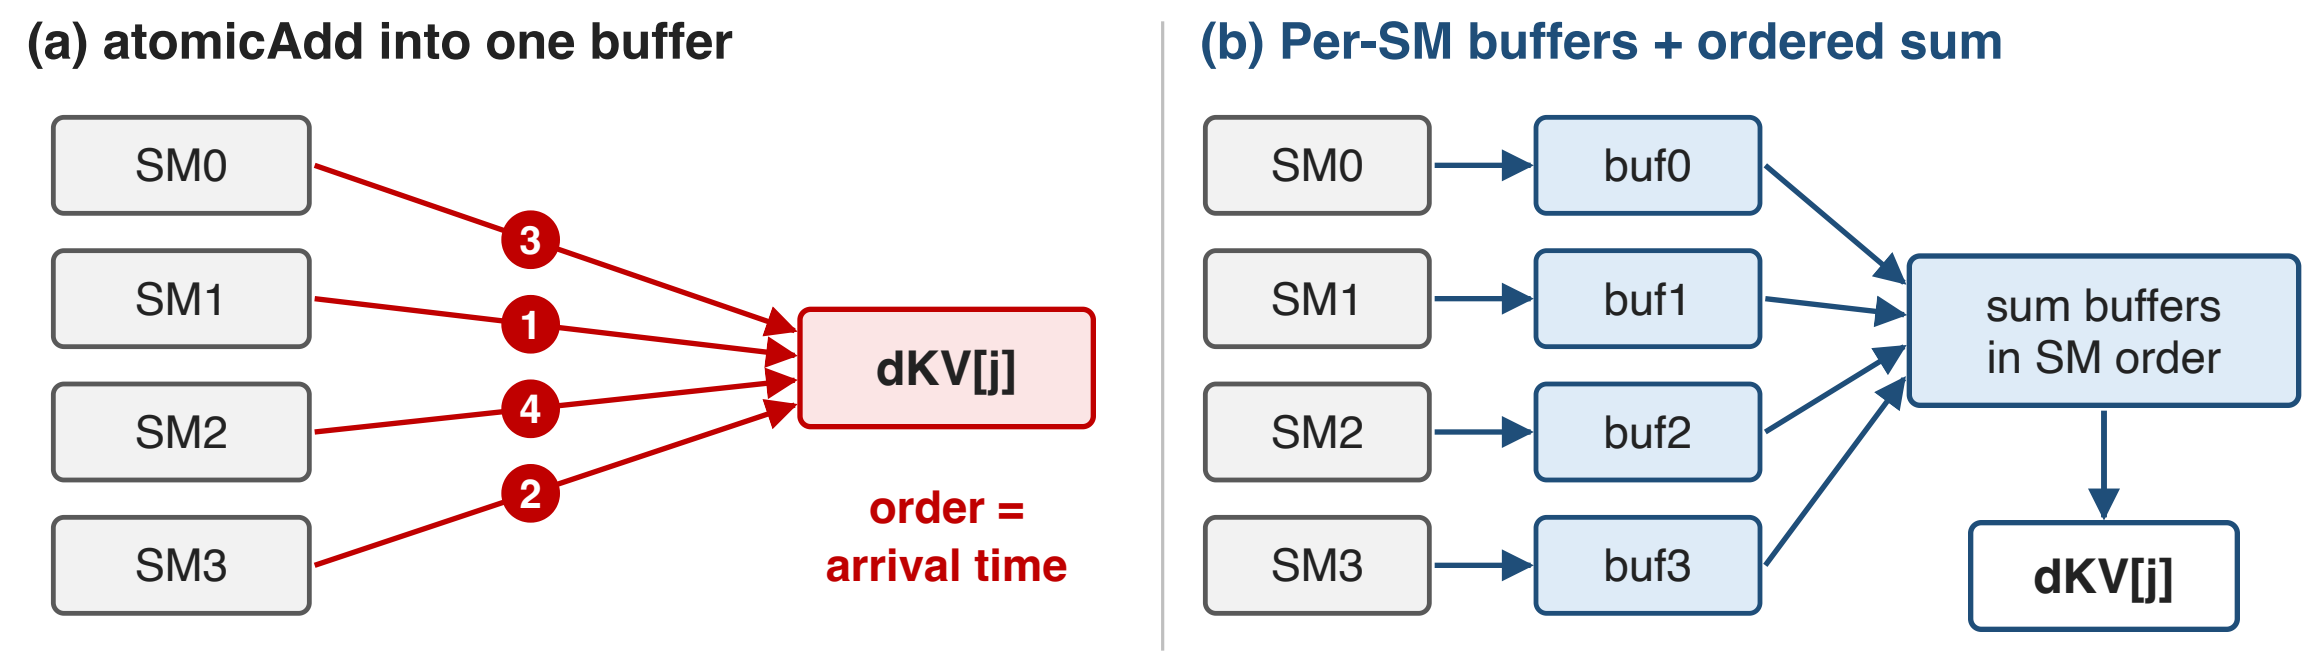
(a) atomicAdd into one buffer
SM0
SM1
SM2
SM3
3
1
4
2
dKV[j]
order =
arrival time
(b) Per-SM buffers + ordered sum
SM0
SM1
SM2
SM3
buf0
buf1
buf2
buf3
sum buffers
in SM order
dKV[j]