
one routed copy of one token

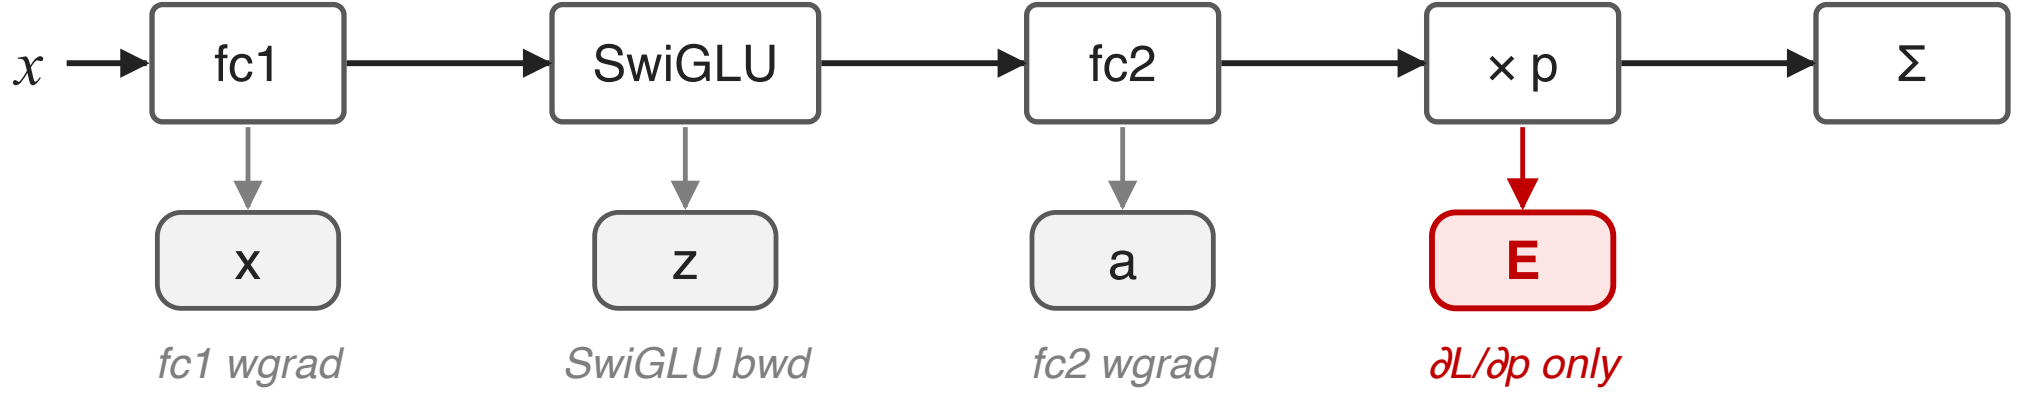

saved for backward

E: one hidden-size row per routed copy

$$\partial L/\partial p = \langle\, E,\, \partial L/\partial y \,\rangle$$