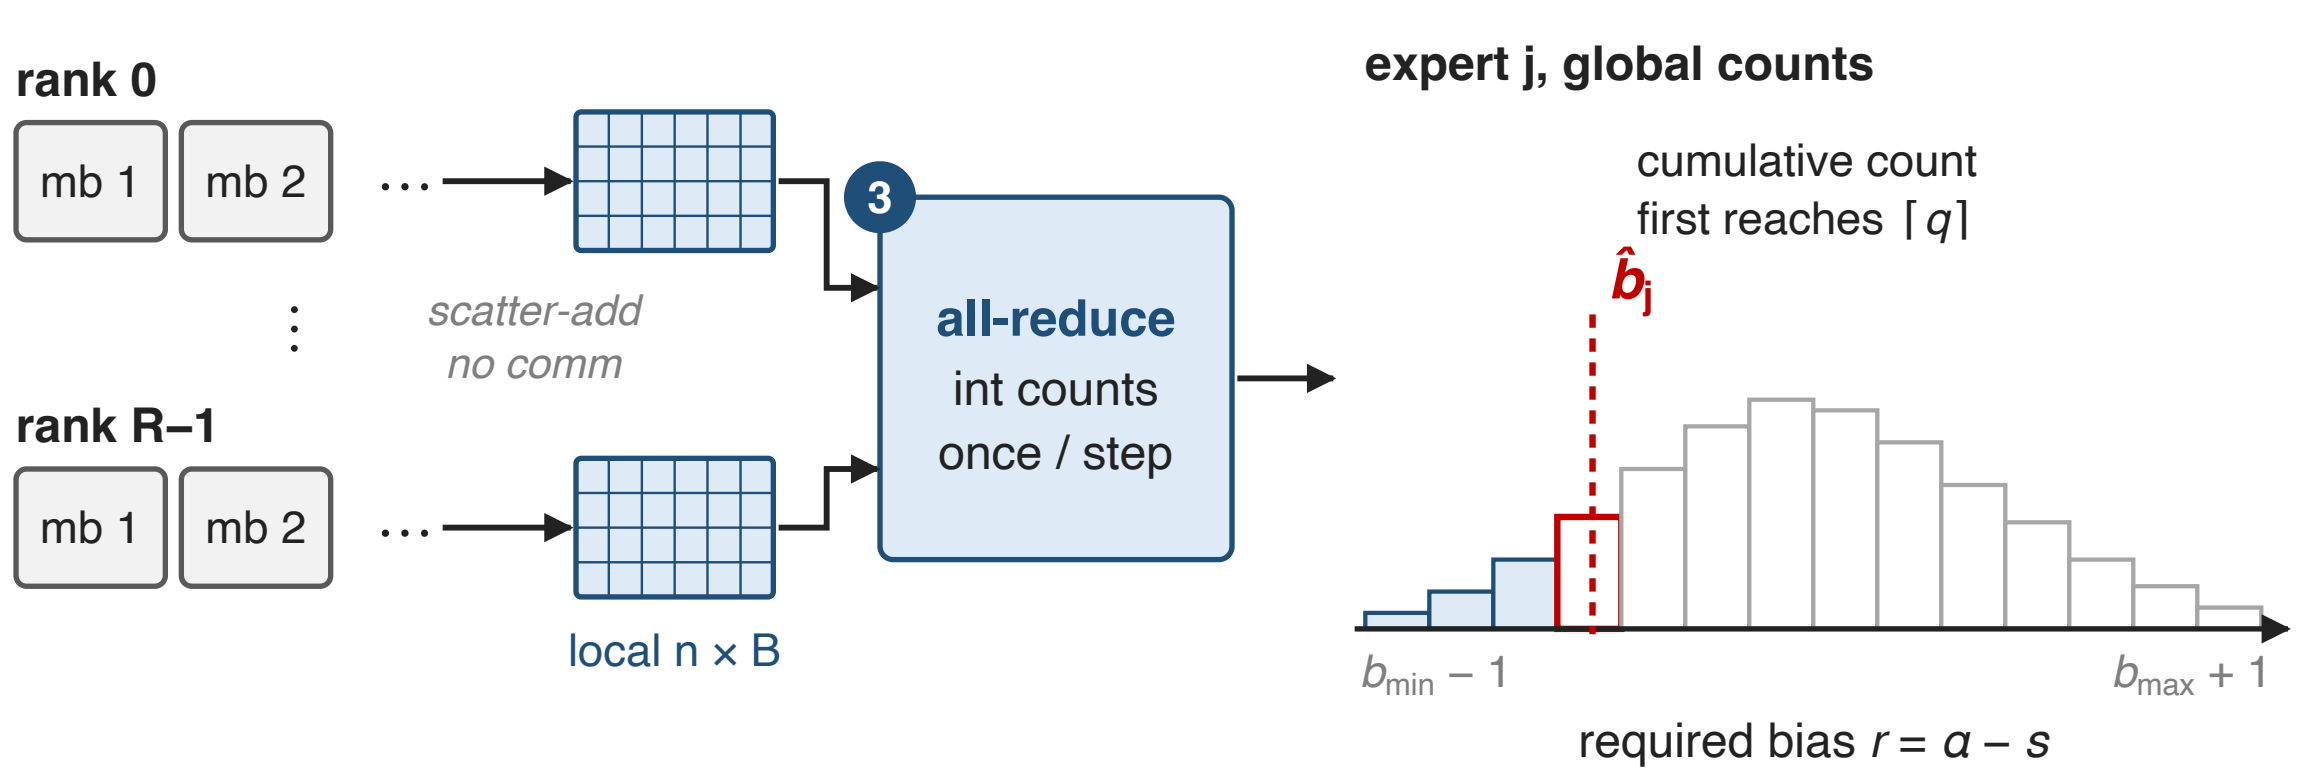

rank 0
mb 1
mb 2
rank R–1
mb 1
mb 2
scatter-add
no comm
local n × B
3
all-reduce
int counts
once / step
expert j, global counts
cumulative count
first reaches ⌈q⌉
$\hat{b}_j$
$b_{min} - 1$
$b_{max} + 1$
required bias $r = a - s$