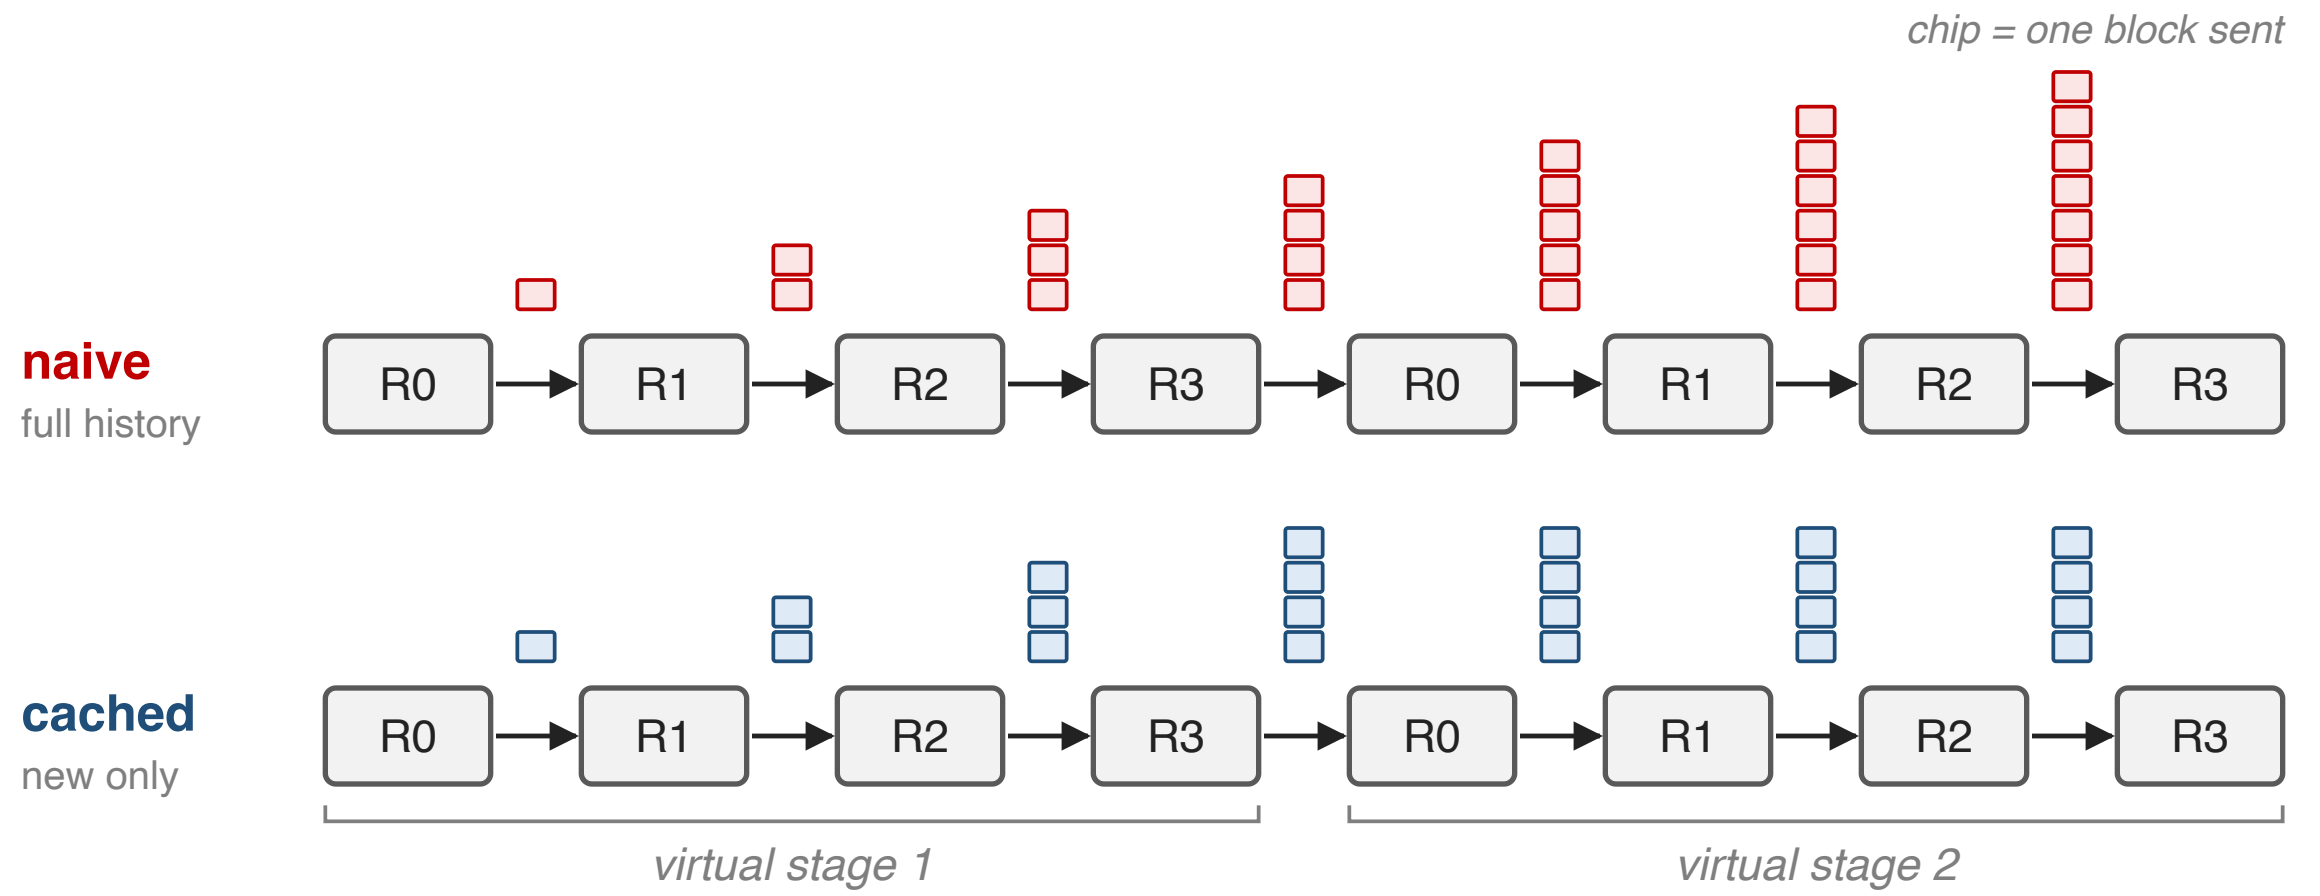
chip = one block sent
naive
full history
R0
R1
R2
R3
R0
R1
R2
R3
cached
new only
R0
R1
R2
R3
R0
R1
R2
R3
virtual stage 1
virtual stage 2