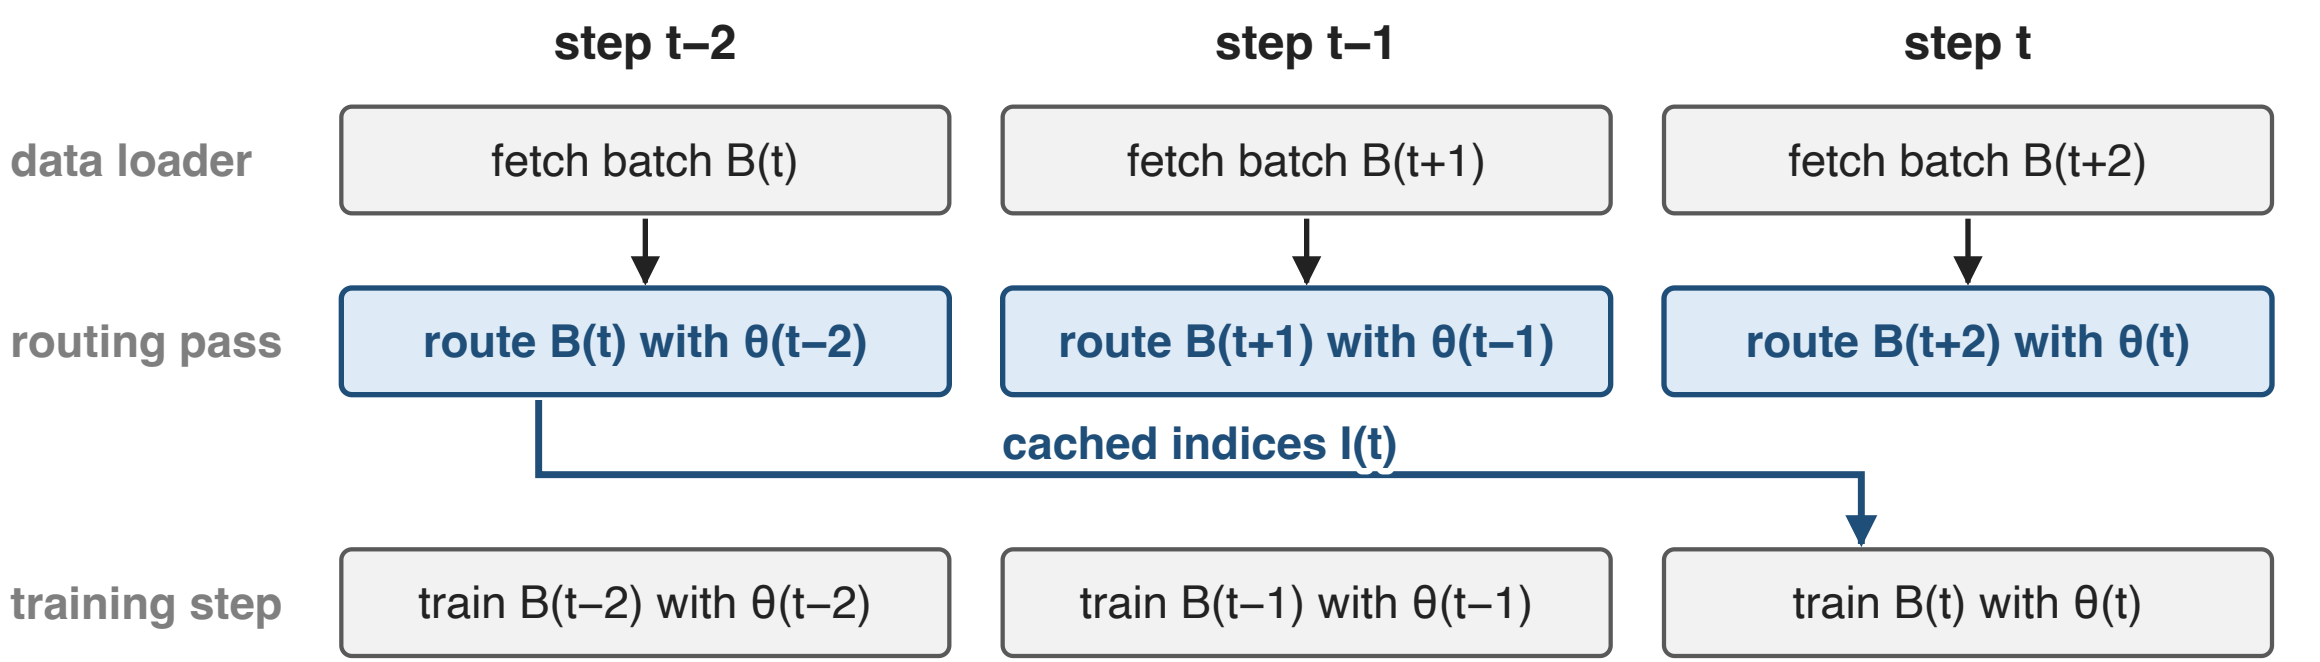

step t–2
step t–1
step t
data loader
fetch batch B(t)
fetch batch B(t+1)
fetch batch B(t+2)
routing pass
route B(t) with θ(t–2)
route B(t+1) with θ(t–1)
route B(t+2) with θ(t)
cached indices I(t)
training step
train B(t–2) with θ(t–2)
train B(t–1) with θ(t–1)
train B(t) with θ(t)
each routing pass feeds the step Δt later (Δt = 2 here)