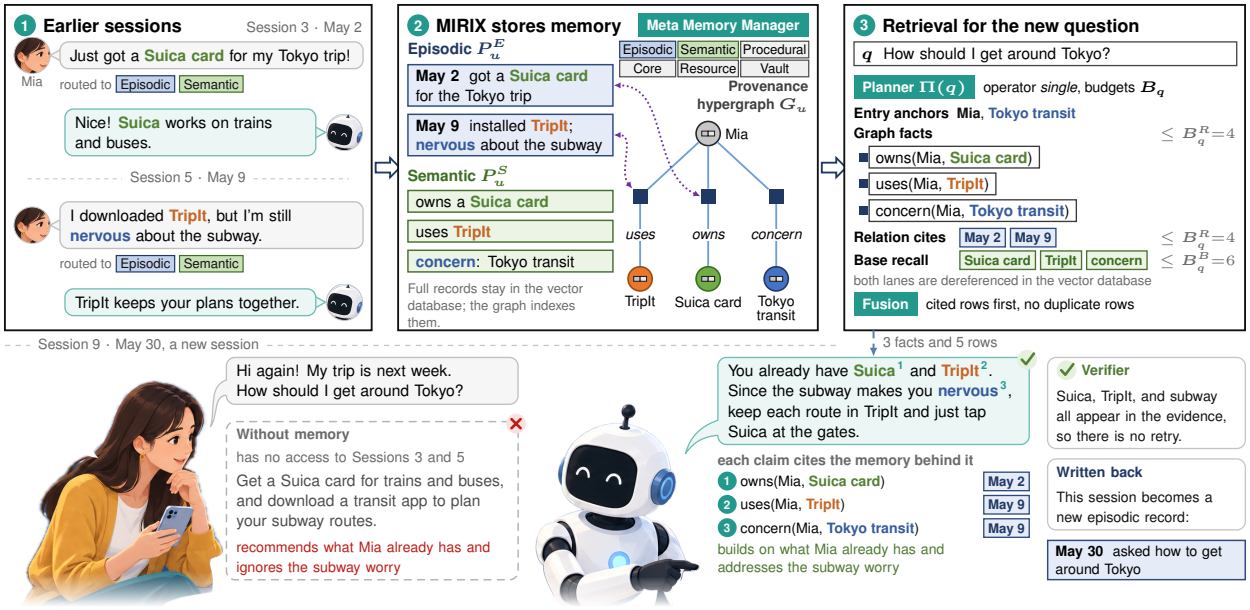
1 Earlier sessions
Session 3 · May 2
Mia
Just got a Suica card for my Tokyo trip!
routed to Episodic Semantic
Nice! Suica works on trains and buses.
Session 5 · May 9
I downloaded TripIt, but I'm still nervous about the subway.
routed to Episodic Semantic
TripIt keeps your plans together.
2 MIRIX stores memory
Meta Memory Manager
Episodic Semantic Procedural
Core Resource Vault
Episodic P_u^E
May 2 got a Suica card for the Tokyo trip
May 9 installed TripIt; nervous about the subway
Semantic P_u^S
owns a Suica card
uses TripIt
concern: Tokyo transit
Full records stay in the vector database; the graph indexes them.
Provenance hypergraph G_u
Mia
uses
owns
concern
TripIt
Suica card
Tokyo transit
3 Retrieval for the new question
q How should I get around Tokyo?
Planner $\Pi(q)$ operator *single*, budgets B_q
Entry anchors Mia, Tokyo transit
Graph facts
$\leq B_q^R=4$
owns(Mia, Suica card)
uses(Mia, TripIt)
concern(Mia, Tokyo transit)
Relation cites May 2 May 9
$\leq B_q^R=4$
Base recall Suica card TripIt concern
$\leq B_q^B=6$
both lanes are dereferenced in the vector database
Fusion cited rows first, no duplicate rows
Session 9 · May 30, a new session
3 facts and 5 rows
Hi again! My trip is next week. How should I get around Tokyo?
Without memory
has no access to Sessions 3 and 5
Get a Suica card for trains and buses, and download a transit app to plan your subway routes.
recommends what Mia already has and ignores the subway worry
You already have Suica[1] and TripIt[2]. Since the subway makes you nervous[3], keep each route in TripIt and just tap Suica at the gates.
each claim cites the memory behind it
1 owns(Mia, Suica card) May 2
2 uses(Mia, TripIt) May 9
3 concern(Mia, Tokyo transit) May 9
builds on what Mia already has and addresses the subway worry
Verifier
Suica, TripIt, and subway all appear in the evidence, so there is no retry.
Written back
This session becomes a new episodic record:
May 30 asked how to get around Tokyo