


together, to get there!  

AG3335

EVK Testing Criteria

AIROHA

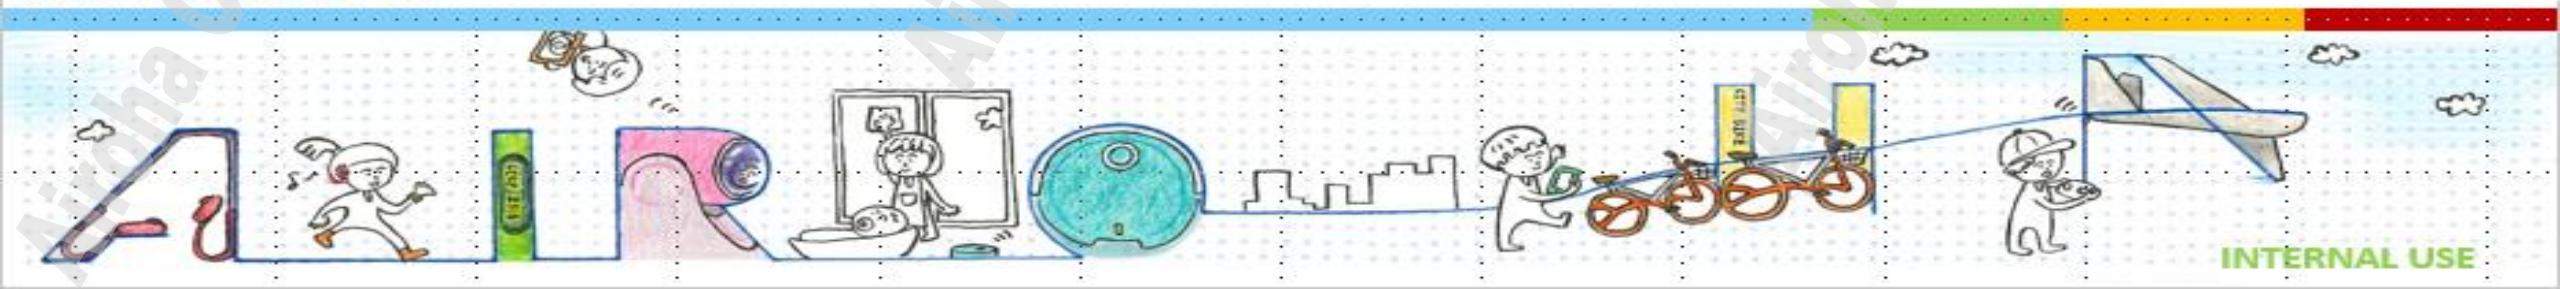

Testing criteria

TTFF Specification

L1+L5/L1

Constellation		G3B	GPS+GLO	GPS Only
Test Description	Test Item (3D-50m/Mean)	Criteria (sec)	Criteria (sec)	Criteria (sec)
Static TTFF test 20 times with signal source as ATE and signal power as -130dBm	Hot Start	1	1	1
	Warm Start	24	24	31
	Cold Start	24	24	31

Sensitivity Specification

L1+L5/L1

Test Description	Test Item	Criteria(dBm)
Tracking and TTFF sensitivity test with signal source as ATE and different signal power.(-130dBm ~ -166dBm)	Tracking	-165
	Reacquire	-160
	Hot Start TTFF	-163
	Warm Start TTFF	-151
	Cold Start TTFF	-148

Accuracy Specification

L1+L5

Test Description	Test Item	Criteria
Static receive 24 hours(open sky)	Horizontal (m)	1.5 (CEP50)
	Vertical (m)	2.25 (CEP50)
	Velocity (m/s)	0.05

L1

Test Description	Test Item	Criteria
Static receive 24 hours(open sky)	Horizontal (m)	2.5 (CEP50)
	Vertical (m)	3.75 (CEP50)
	Velocity (m/s)	0.05

Dynamic Specification

L1+L5/L1

Test Description	Test Item	Criteria
Dynamic Performance	Maximum Altitude(m)	18000
	Maximum Velocity (m/s)	500
	Maximum Acceleration (G)	4

AIROHA

Let's make life better.