


## Configuration of Database and Server


1. Start XAMPP's Apache and mysql server.
2. Create the database called "koenigfriseur" in phpMyAdmin. Import the sql file "koenigfriseur\_database.sql" to create the necessary tables in this database. Then create a user account called "koenigfriseur" with Host name "localhost" and password "000000". Assign all privileges to this user.
3. Put "KoenigFriseur(TripleW)" folder into document root of your server. Then you can run this project starting with "http://localhost/KoenigFriseur(TripleW)/index.php"
4. The "index.php" is the website for visitors while the "KoenigFriseurCMS.php" is the control panel of the CMS for administrators.

## An instruction of how to configure the mail functionality in your server


1. Make sure that you have this "sendmail" folder in "XAMPP" folder and these files in "sendmail" folder. If not, please download it via: <https://www.glob.com.au/sendmail/sendmail.zip>, and install the "sendmail" folder in "XAMPP" folder.

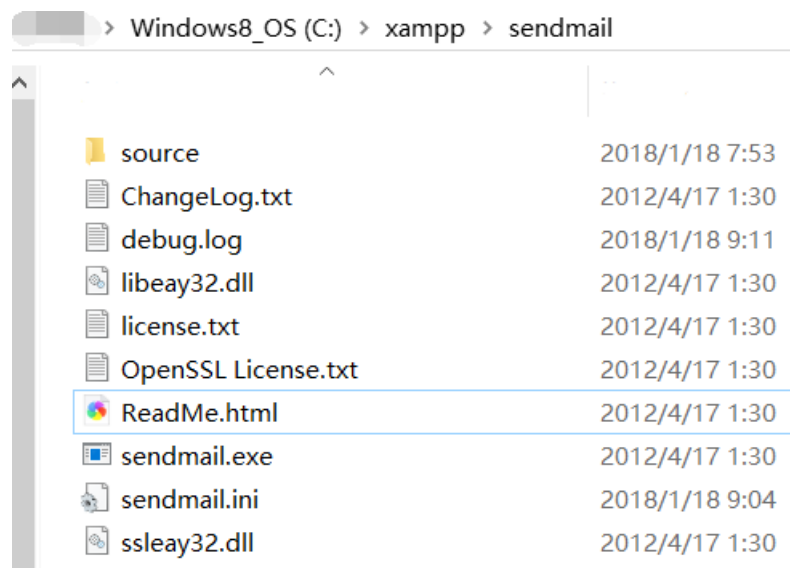

2. Configure your mail server. We use a gmail account as an example and we strongly recommend you to use a gmail account when configuring your mail server.
  - a) Log in in your gmail, click the name circle on the right top, and then click "my account".

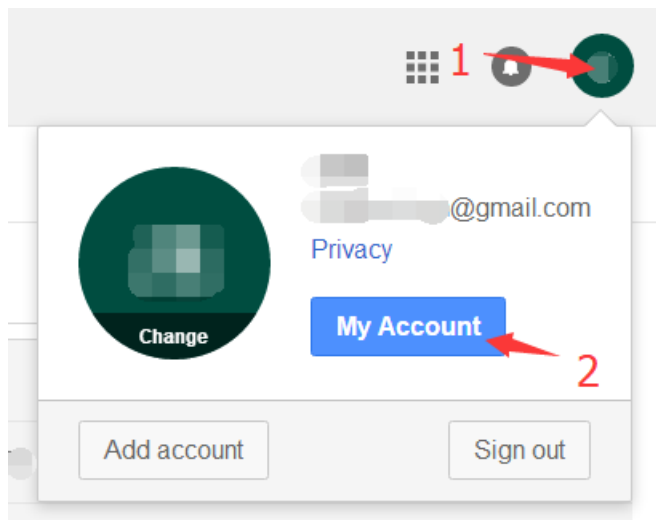

b) Click "Device activity & security events."

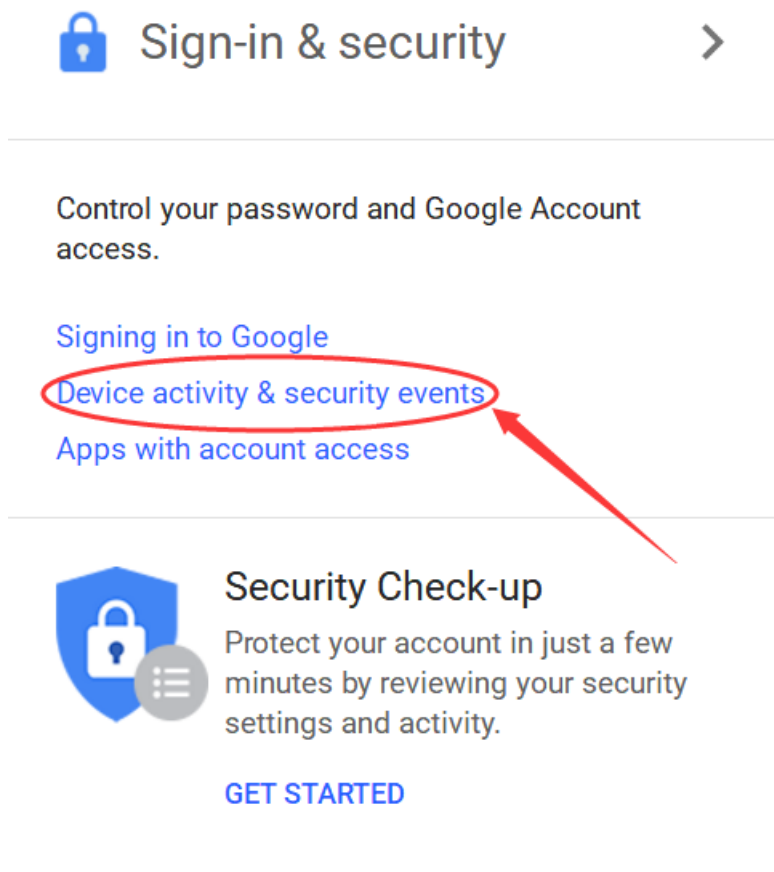

c) Go to "Apps with account access" part and set "Allow less secure apps" **ON**.

## Apps with account access

Keep track of which apps or services you gave permission to access your account, and remove the ones that you no longer use or trust.

### Apps with access to your account

Make sure that you still use these apps and trust them with your information.

✂ AIA Wifi Access

✂ NVIDIA

✂ Pokémon GO

📱 Quizlet

(+3 more)

[MANAGE APPS](#)

### Saved passwords

You have secured your data with a sync passphrase. You will only be able to access your passwords from Chrome settings.

[LEARN MORE](#)

Allow less secure apps: OFF

click it to be status: ON



Some apps and devices use less secure sign-in technology, which could leave your account vulnerable. You can turn off access for these apps (which we recommend) or choose to use them despite the risks.

3. Open "sendmail.ini" in the folder "sendmail" and modify it as below
  - 1) smtp\_server=smtp.gmail.com
  - 2) smtp\_port=587
  - 3) error\_logfile=error.log
  - 4) debug\_logfile=debug.log
  - 5) auth\_username=your-gmail-id@gmail.com
  - 6) auth\_password=you-gmail-password
  - 7) force\_sender=your-gmail-id@gmail.com
4. Open "php.ini" in the folder "php" and modify it as below
  - 1) SMTP=smtp.gmail.com
  - 2) smtp\_port=587
  - 3) sendmail\_from=your-gmail-id@gmail.com
  - 4) sendmail\_path="C:\xampp\sendmail\sendmail.exe -t"

;If your XAMPP is not installed in the root of Disk C, please find your path to "xampp\sendmail\sendmail.exe"
5. Reboot your server. The configuration is finished.