


rocr::Addr::V2::Gfx11Lib
::HwlComputeNonBlockCompressedView

rocr::Addr::V2::Gfx11Lib
::HwlGetPreferredSurfaceSetting

rocr::Addr::V2::Gfx11Lib
::HwlComputeSurfaceInfoTiled

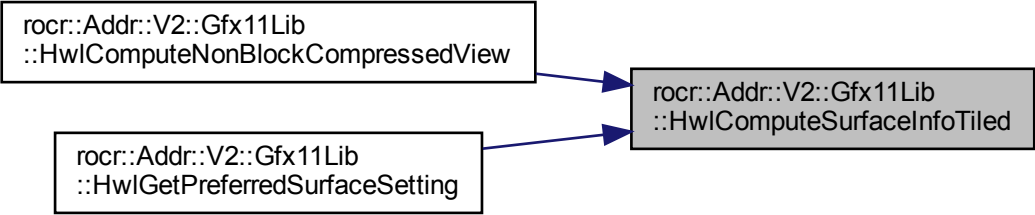

```
graph LR; A[rocr::Addr::V2::Gfx11Lib  
::HwlComputeNonBlockCompressedView] --> C[rocr::Addr::V2::Gfx11Lib  
::HwlComputeSurfaceInfoTiled]; B[rocr::Addr::V2::Gfx11Lib  
::HwlGetPreferredSurfaceSetting] --> C;
```

The diagram illustrates a mapping or dependency between two source functions and a target function. Two white rectangular boxes on the left represent the source functions: 'rocr::Addr::V2::Gfx11Lib::HwlComputeNonBlockCompressedView' (top) and 'rocr::Addr::V2::Gfx11Lib::HwlGetPreferredSurfaceSetting' (bottom). Two blue arrows originate from these boxes and point towards a single gray rectangular box on the right, which represents the target function: 'rocr::Addr::V2::Gfx11Lib::HwlComputeSurfaceInfoTiled'. The gray box is positioned to the right of the white boxes, and the arrows indicate a flow or relationship from the white boxes to the gray box.