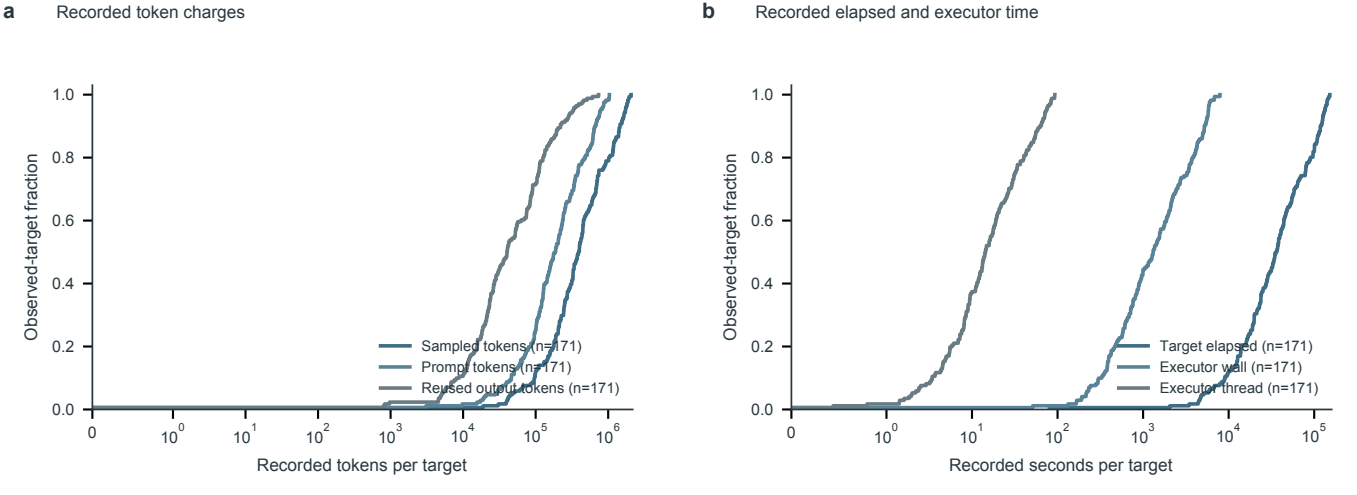

Shared reuse is retained per target; these records do not provide additive global GPU work.

Missing values are excluded, not zero-filled. Elapsed and executor fields are not an additive decomposition.