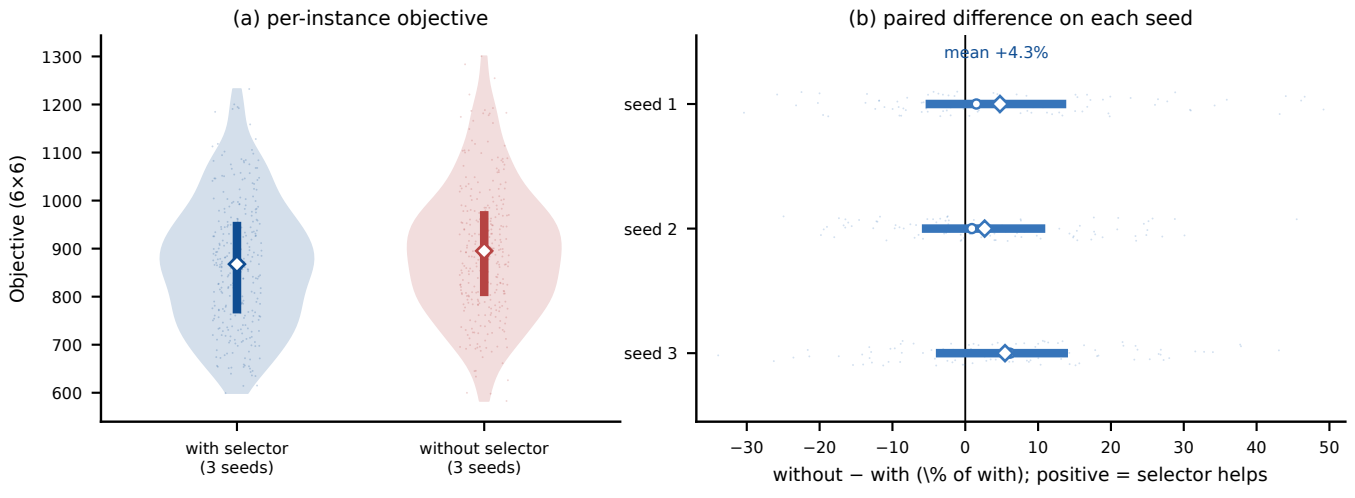

(a) per-instance objective
Objective (6×6)
1300
1200
1100
1000
900
800
700
600
with selector
(3 seeds)
without selector
(3 seeds)
(b) paired difference on each seed
mean +4.3%
seed 1
seed 2
seed 3
−30
−20
−10
0
10
20
30
40
50
without − with (\% of with); positive = selector helps