K2 POWER M

6.5 KM

Product sheet



Power and compactness are the watchwords of the new K2 Power M line. Our engineers have packed the best Focal technologies, around our iconic K2 cone made with aramid fibre, renowned for its exceptional dynamics and high performance. Available "à la carte", the K2 Power M products enable you to create the active audio system of your choice for a bespoke installation.



Key points

- Exclusive 'M'-profile K2 cone
- Compact speaker driver
- Exceptional power handling
- Active product
- Aluminium grille (optional)

Туре	Woofer
Woofer	6 ^{1/2} " (165mm)
Depth	2 ^{1/8} " (54mm)
Cone	K2 Sandwich, M-shaped
Maximum power	240W
Nominal power	120W RMS
Sensitivity (2.83V/1m)	92.5dB
Frequency response	50Hz- 5kHz
Impedance	4 Ω
Magnet	Ferrite
Voice-coil diameter	2 ^{3/8} " (60mm)
Suspension	TMD®



K2 POWER M

6.5 KM

Technical Sheet


Woofer



SPECIFICATIONS

Nominal power	120W	
Maximum power	240W	
Sensitivity	93dB	
Nom. impedance	4Ω	
Frequency response	50Hz-5KHz	
Cone	Kevlar Sandwich, M	
Surround	TMD®	
VC diameter	60mm	2 3/8"
Net weight	1950g	

FREQUENCY RESPONSE/IMPEDANCE

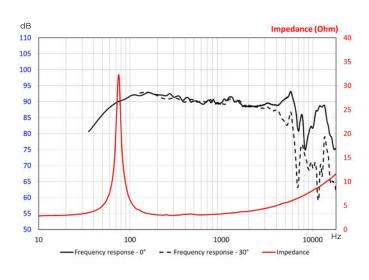

PARAMETERS

Rdc	3Ω
Fs	76Hz
Mms	14g
Cms	0.3mm/N
Vas	71
Qts	0.77
Qes	0.82
Qms	10.7
BxI	5N/A
Sd	128cm²

MECHANICAL DRAWING

