

NEPYX NDT (NetDesktop) AIH 재기동 매뉴얼

- 1.
- 2.
- 3.

SI + 제조 전문 기업

3S소프트




목 차

1. AIH 아키텍처	2
2. AIH 서비스 구성	
2.1 REDIS	3
2.2 MariaDB	4
2.3 NEXT.JS	5
2.4 FASTAPI	6
3. AIH 재기동 절차	7



AIH 아키텍처

후처리 과정: 답변 확인 후 프롬프트 정의,
파인튜닝을 통한 미세조정 실시

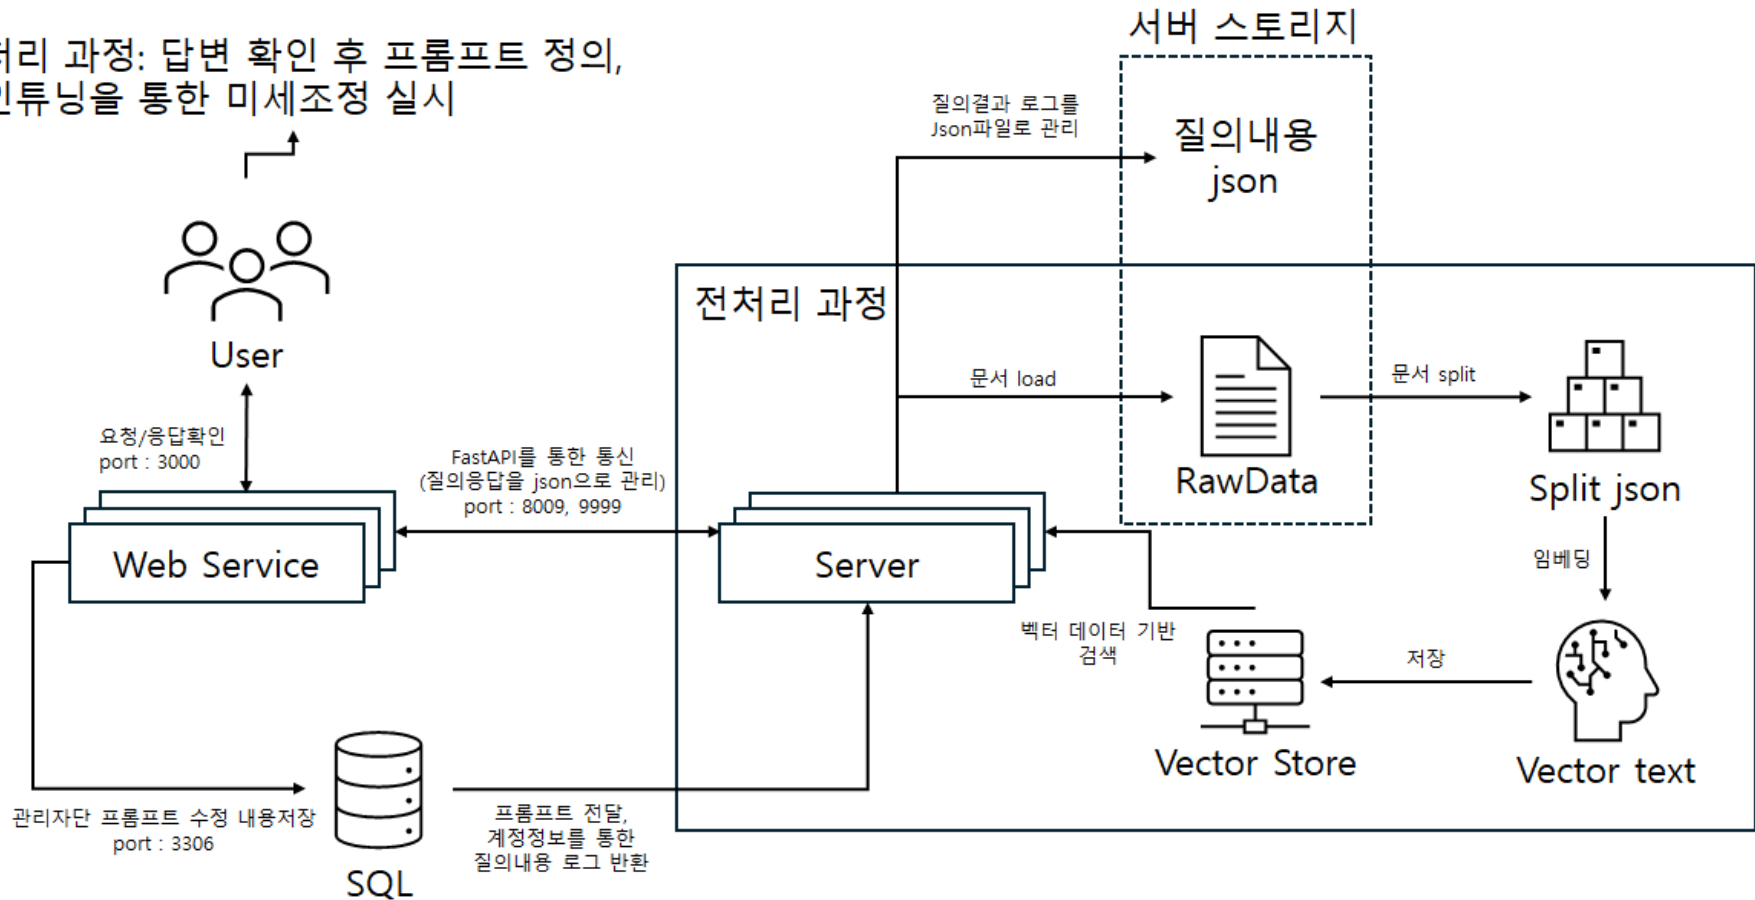



AIH 에서 Redis 는 채팅 세션을 관리하기 위한 목적의 서비스입니다 .

2.1. REDIS

```
[root@aitest70 my-chat-app]# systemctl status redis
● redis.service - Redis persistent key-value database
   Loaded: loaded (/usr/lib/systemd/system/redis.service; enabled; preset: disabled)
   Drop-In: /etc/systemd/system/redis.service.d
            └─limit.conf
   Active: active (running) since Fri 2025-04-11 14:26:11 KST; 5 days ago
   Main PID: 2337311 (redis-server)
   Status: "Ready to accept connections"
   Tasks: 5 (limit: 813417)
   Memory: 9.3M
           CPU: 7min 35.784s
   CGroup: /system.slice/redis.service
            └─2337311 "/usr/bin/redis-server 127.0.0.1:6379"

Apr 11 14:26:11 aitest70 systemd[1]: Starting Redis persistent key-value database...
Apr 11 14:26:11 aitest70 systemd[1]: Started Redis persistent key-value database.
```

```
[root@aitest70 my-chat-app]# redis-cli --stat
----- data ----- load ----- child -
keys      mem      clients blocked requests      connections
2          917.06K  4        0        1743 (+0)  120
2          917.06K  4        0        1744 (+1)  120
2          917.06K  4        0        1745 (+1)  120
2          917.06K  4        0        1746 (+1)  120
2          917.06K  4        0        1747 (+1)  120
2          917.06K  4        0        1748 (+1)  120
```



- ✓
- ✓
- ✓
- ✓


AIH 에서 MariaDB 는 고정 FAQ 를 저장 / 관리하기 위한 목적의 서비스입니다 .

2.2. MariaDB

```
[root@aitest70 my-chat-app]# systemctl status mysqld
● mysqld.service - MySQL 8.0 database server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; preset: disabled)
   Active: active (running) since Wed 2025-04-09 17:06:18 KST; 1 week 0 days ago
     Main PID: 2260876 (mysqld)
    Status: "Server is operational"
      Tasks: 38 (limit: 813417)
     Memory: 396.0M
        CPU: 41min 15.203s
    CGroup: /system.slice/mysqld.service
            └─2260876 /usr/libexec/mysqld --basedir=/usr

Apr 09 17:06:10 aitest70 systemd[1]: Starting MySQL 8.0 database server...
Apr 09 17:06:10 aitest70 mysql-check-socket[2260816]: Socket file /var/lib/mysql/mysql.sock exists.
Apr 09 17:06:10 aitest70 mysql-check-socket[2260816]: No process is using /var/lib/mysql/mysql.sock, which means it is a garbage, so it will be removed automatically.
Apr 09 17:06:18 aitest70 systemd[1]: Started MySQL 8.0 database server.
[root@aitest70 my-chat-app]#
```

```
[root@aitest70 my-chat-app]# mysql -uroot -p3Ssoft1! my_chat_app -e 'show tables'
mysql: [Warning] Using a password on the command line interface can be insecure.
+-----+
| Tables_in_my_chat_app |
+-----+
| example_questions     |
| users                 |
+-----+
[root@aitest70 my-chat-app]#
```

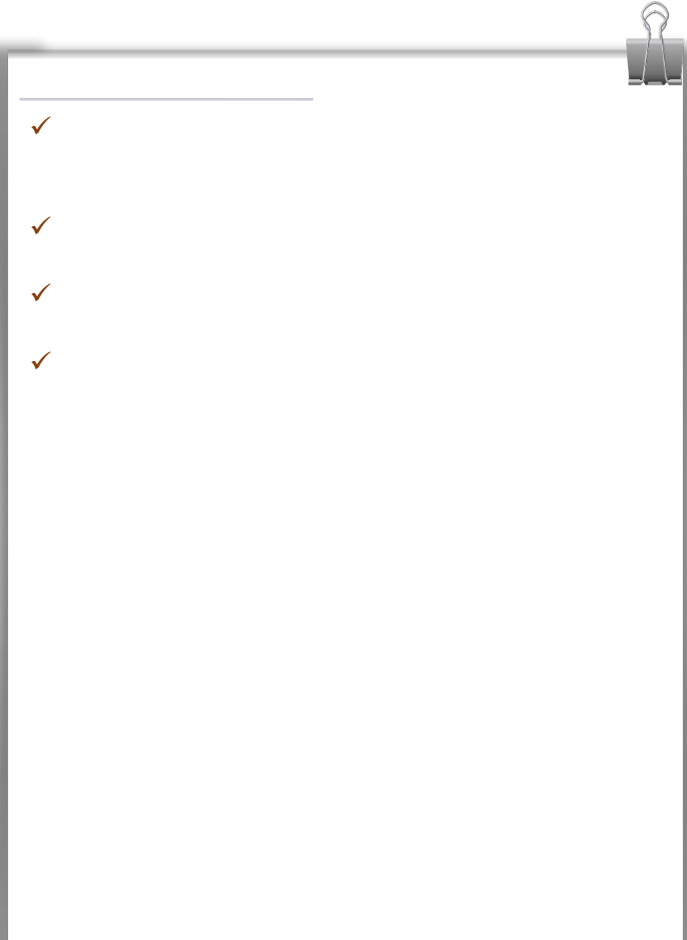



AIH 에서 Next.js 는 프론트엔드를 개발하기 위한 목적의 서비스입니다 .

2.3. Next.js

```
[root@aitest70 my-chat-app]# npm start  
  
> my-chat-app@0.1.0 start  
> next start  
  
  ▲ Next.js 15.1.7  
  - Local:      http://localhost:3000  
  - Network:    http://172.10.2.70:3000  
  
✓ Starting...  
✓ Ready in 243ms
```

```
[root@aitest70 my-chat-app]# ps -ef|grep npm  
root      2725153 2635624  0 11:16 pts/0    00:00:00 npm start
```



✓

✓

✓



AIH 에서 FastAPI 는 백엔드를 개발하기 위한 목적의 서비스입니다 .

2.4. FastAPI

```
[root@aitest70 my-chat-app]# nohup uvicorn server:app --host 0.0.0.0 --port 8009 --reload > fastapi.log 2>&1 &
[2] 2725807
[root@aitest70 my-chat-app]# nohup env PYTHONPATH="/home/root/3sfront/my-chat-app" uvicorn askllm:app --host 0.0.0.0 --port 9999 --reload > askllm.log 2>&1 &
[3] 2725846
[root@aitest70 my-chat-app]#
```

```
[root@aitest70 my-chat-app]# lsof -i :8009
COMMAND      PID USER   FD   TYPE    DEVICE  SIZE/OFF NODE NAME
uvicorn       2725550 root    3u   IPv4  24475614      0t0  TCP *:8009 (LISTEN)
python3.1    2725555 root    3u   IPv4  24475614      0t0  TCP *:8009 (LISTEN)
[root@aitest70 my-chat-app]# lsof -i :9999
COMMAND      PID USER   FD   TYPE    DEVICE  SIZE/OFF NODE NAME
uvicorn       2725551 root    3u   IPv4  24519148      0t0  TCP *:distinct (LISTEN)
python3.1    2725554 root    3u   IPv4  24519148      0t0  TCP *:distinct (LISTEN)
```



✓

✓

✓

AIH 재기동 절차



✓

✓

✓

감사합니다 .