VAVR vs Zazr Deep Dive

VAVR vs Zazr · Same Option describe in both libraries · Build with Waqar


Today's Hook

- Today's force: Same Option describe in both libraries
- We earn VAVR vs Zazr by feeling the naive pain first.
- Demo main prints a real JDK 25 trace (happy + failure).
- Key types: OptionCompare

The Problem

- Describe an optional String with the same map/getOrElse program.
- Left: real io.vavr.control.Option; right: real dev.zazr.control.Option.
- Naive uses null and returns 'none'/'some:' — ambiguous at call sites.
- Success: vavr-some:x mirrors zazr-some:x; both pipelines agree on blank→none.

Structure

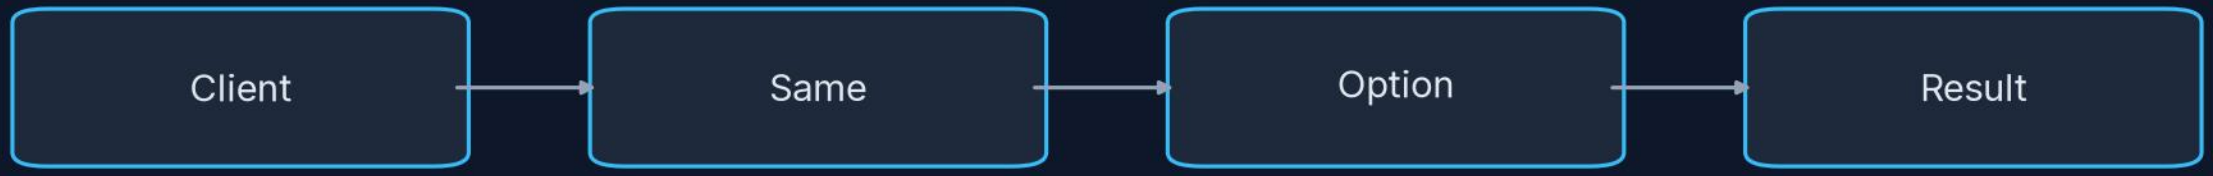

VAVR vs Zazr: Same Option describe in both libraries

Real-World Scenario

- Running example: Same Option describe in both libraries
- Key types: OptionCompare
- Happy-path stdout cue: none
- Failure-path stdout cue: none

Naive Code

```java
package com.buildwithwaqar.patterns.functional.vavrcompare.problem;

import java.util.*;

public final class NaiveOpt {
  public static String describe(String s){ return s==null? "none": "some:"+s; }
}
```

Why Naive Hurts

- Null String forces every caller to remember the sentinel convention.
- Stand-in 'vavrStyleDescribe' lied — tests did not exercise VAVR.
- API differences (VAVR Option.of vs Zazr some/none/switch) need a live demo.
- Without both jars in the demo, migration advice is unverifiable.

Solution

```java
package com.buildwithwaqar.patterns.functional.vavrcompare.problem;

/**
 * Side-by-side: same Option describe / map+flatMap program on real VAVR and real Zazr.
 */
public final class OptionCompare {
    private OptionCompare() {}

    public static String vavrDescribe(String raw) {
        io.vavr.control.Option<String> o = raw == null
                ? io.vavr.control.Option.none()
                : io.vavr.control.Option.some(raw);
        return o.map(s -> "vavr-some:" + s).getOrElse("vavr-none");
    }

    public static String zazrDescribe(String raw) {
        dev.zazr.control.Option<String> o = raw == null
                ? dev.zazr.control.Option.none()
                : dev.zazr.control.Option.some(raw);
        return o.map(s -> "zazr-some:" + s).getOrElse("zazr-none");
    }
```

Solution (2)

```
    /** Trim → reject blank → lowercase — identical pipeline on both libraries. */
    public static String vavrMapFlat(String raw) {
        return io.vavr.control.Option.of(raw)
                .flatMap(s -> s.isBlank() ? io.vavr.control.Option.none() : io.vavr.control.Option.some(s.trim()))
                .map(String::toLowerCase)
                .map(s -> "vavr-some:" + s)
                .getOrElse("vavr-none");
    }

    public static String zazrMapFlat(String raw) {
        return (raw == null ? dev.zazr.control.Option.<String>none() : dev.zazr.control.Option.some(raw))
                .flatMap(s -> s.isBlank() ? dev.zazr.control.Option.none() : dev.zazr.control.Option.some(s.trim()))
                .map(String::toLowerCase)
                .map(s -> "zazr-some:" + s)
                .getOrElse("zazr-none");
    }
}
```

Runnable main

```java
package com.buildwithwaqar.patterns.functional.vavrcompare.problem;

/** Problem: same Option describe — real io.vavr vs real dev.zazr. */
public final class ProblemDemo {
    public static void main(String[] args) {
        System.out.println("=== VAVR vs Zazr: real Option APIs ===");
        System.out.println("--- naive null String ---");
        System.out.println(NaiveOpt.describe(null));
        System.out.println(NaiveOpt.describe("Hi"));

        System.out.println("--- describe (some/none) ---");
        System.out.println(OptionCompare.vavrDescribe("x"));
        System.out.println(OptionCompare.zazrDescribe("x"));
        System.out.println(OptionCompare.vavrDescribe(null));
        System.out.println(OptionCompare.zazrDescribe(null));

        System.out.println("--- map/flatMap pipeline ---");
        System.out.println(OptionCompare.vavrMapFlat("  Hello "));
        System.out.println(OptionCompare.zazrMapFlat("  Hello "));
        System.out.println(OptionCompare.vavrMapFlat("   "));
        System.out.println(OptionCompare.zazrMapFlat("   "));
        System.out.println(OptionCompare.vavrMapFlat(null));
        System.out.println(OptionCompare.zazrMapFlat(null));
    }
```

Runnable main (2)

```
}
```

Walkthrough Output

```
=== VAVR vs Zazr: real Option APIs ===
--- naive null String ---
none
some:Hi
--- describe (some/none) ---
vavr-some:x
zazr-some:x
vavr-none
zazr-none
--- map/flatMap pipeline ---
vavr-some:hello
zazr-some:hello
vavr-none
zazr-none
vavr-none
zazr-none
```

Step-by-Step Trace

- Match stdout to stages — look for: none
- Then the injected failure: none
- Re-run: java -cp ... 65-vavr-vs-zazr ProblemDemo (see episode folder).
- Pause the video and predict the next printed line.

Modern Java 25 / Zazr

```java
package com.buildwithwaqar.patterns.functional.vavrcompare.problem;

/**
 * Side-by-side: same Option describe / map+flatMap program on real VAVR and real Zazr.
 */
public final class OptionCompare {
    private OptionCompare() {}

    public static String vavrDescribe(String raw) {
        io.vavr.control.Option<String> o = raw == null
                ? io.vavr.control.Option.none()
                : io.vavr.control.Option.some(raw);
        return o.map(s -> "vavr-some:" + s).getOrElse("vavr-none");
    }

    public static String zazrDescribe(String raw) {
        dev.zazr.control.Option<String> o = raw == null
                ? dev.zazr.control.Option.none()
                : dev.zazr.control.Option.some(raw);
        return o.map(s -> "zazr-some:" + s).getOrElse("zazr-none");
    }
```

Modern Java 25 / Zazr (2)

```
/** Trim → reject blank → lowercase — identical pipeline on both libraries. */
public static String vavrMapFlat(String raw) {
    return io.vavr.control.Option.of(raw)
            .flatMap(s -> s.isBlank() ? io.vavr.control.Option.none() : io.vavr.control.Option.some(s.trim()))
            .map(String::toLowerCase)
            .map(s -> "vavr-some:" + s)
            .get
```

Trade-offs

- Use VAVR vs Zazr when «Same Option describe in both libraries» repeats and a simpler feature does not erase it.
- Refuse extra types when a sealed switch or a function value already suffices.
- Teaching demos omit production metrics, retries, and multi-region clocks.
- Interview soundbite: state the force behind VAVR vs Zazr in product language.

Related Patterns

- Name the pattern usually confused with VAVR vs Zazr and separate the forces.
- Sketch the roles for «Same Option describe in both libraries» from memory in sixty seconds.
- Point to the next episode in this season on the playlist map.
- Link this episode's series/ folder in the YouTube description.

Recap

- Problem: Same Option describe in both libraries
- Naive pain → VAVR vs Zazr boundary → Demo stdout.
- Remember the failure cue: none
- Break a ProblemTest assertion, watch it fail, restore it.