

Talvori Database Structure


Andreas Warda

04.11.2025

Contents

Talvori – Database Structure	1
Talvori – Data Dictionary (public)	3
Talvori – Data Dictionary (public)	3
public.captures	3
public.categories	3
public.entries	3
public.ingest_errors	4
public.lesson_words	4
public.lessons	5
public.profiles	5
public.single_session_items	5
public.staging_words	6
public.user_daily_picks	6
public.user_words	6
public.word_categories	7
public.words	7

Talvori – Database Structure

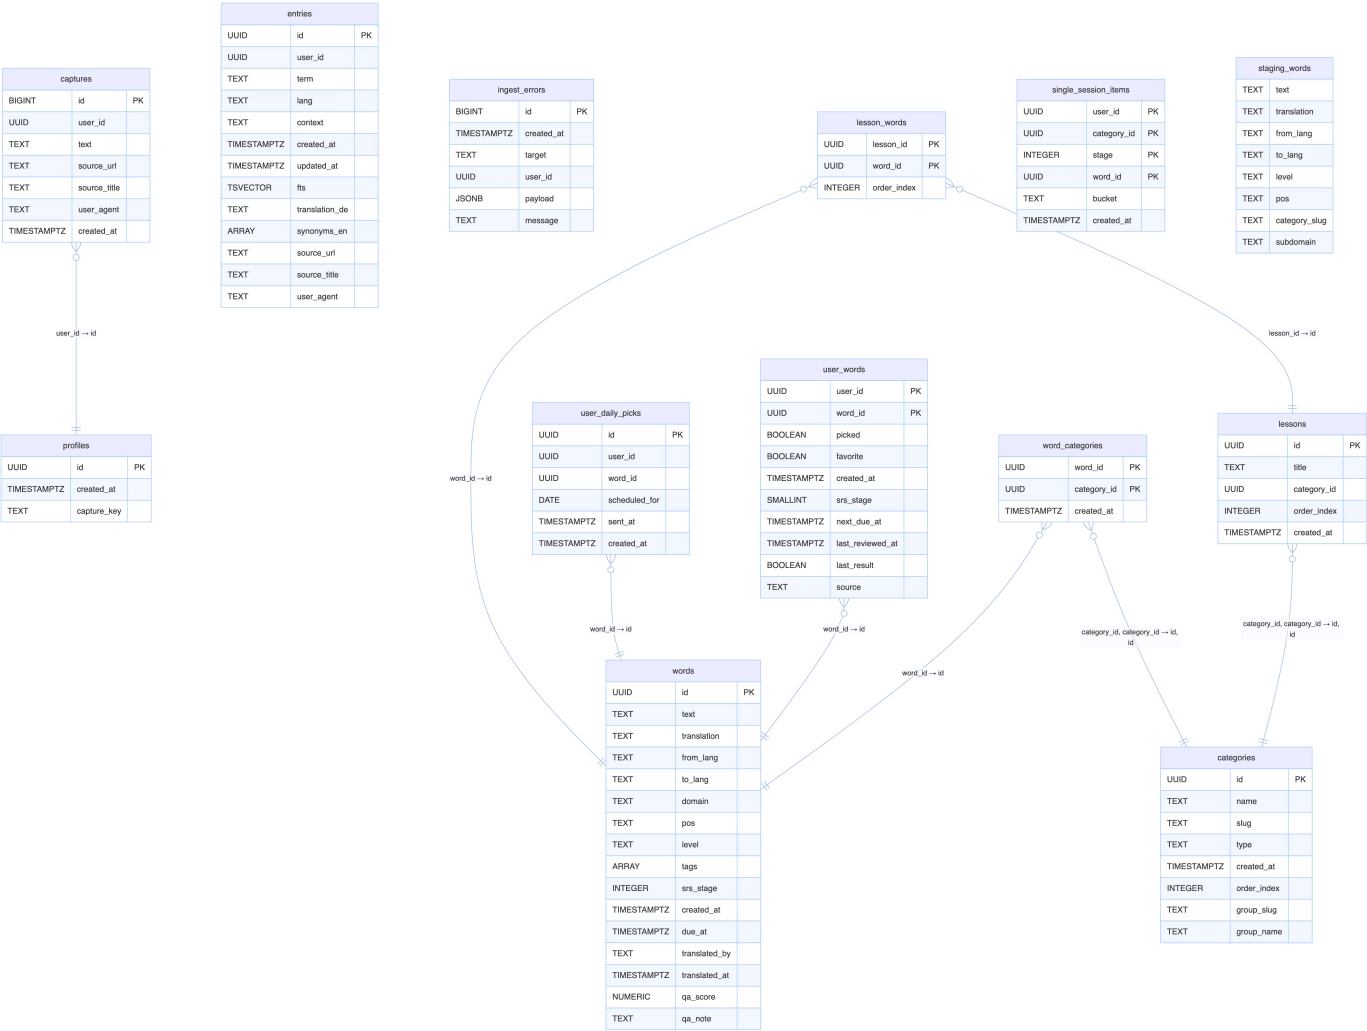

Generiert: 2025-11-04 20:50

public.captures

RLS: user_id = auth.uid().

#	Column	Type	Null	PK	Default	Description
1	id	bigint	NO	YES	nextval('captures_id_seq'::regclass)	
2	user_id	uuid	NO			
3	text	text	NO			
4	source_url	text	YES			
5	source_title	text	YES			
6	user_agent	text	YES			
7	created_at	timestamp with time zone	YES		now()	

Foreign Keys

- captures_user_id_fkey: (user_id) -> public.profiles (id) · on update NO ACTION · on delete CASCADE

public.categories

Vokabel-Gruppierungen (CEFR, Topics, Domains); steuernde Reihenfolge.

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES	gen_random_uuid()	
2	name	text	NO			
3	slug	text	NO			
4	type	text	NO			z. B. 'cefr', 'topic', 'domain'.
5	created_at	timestamp with time zone	NO		now()	
6	order_index	integer	YES			
7	group_slug	text	YES			
8	group_name	text	YES			

public.entries

RLS: user_id = auth.uid().

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES	gen_random_uuid()	

#	Column	Type	Null	PK	Default	Description
2	user_id	uuid	NO			
3	term	text	NO			
4	lang	text	YES		'de'::text	
5	context	text	YES			
6	created_at	timestamp with time zone	YES		now()	
7	updated_at	timestamp with time zone	YES		now()	
8	fts	tsvector	YES		to_tsvector('simple'::regconfig, ((COALESCE(term, ' '::text) ' '::text) COA- LESCE(context, ' '::text)))	Volltextindex für Suche.
9	translation_de	text	YES			
10	synonyms_en	text[]	YES		'{}'::text[]	
11	source_url	text	YES			
12	source_title	text	YES			
13	user_agent	text	YES			

public.ingest_errors

Fehlerprotokoll beim Import/Parsing.

#	Column	Type	Null	PK	Default	Description
1	id	bigint	NO	YES	nextval('ingest_errors_id_seq'::regclass)	
2	created_at	timestamp with time zone	YES		now()	
3	target	text	YES			
4	user_id	uuid	YES			
5	payload	jsonb	YES			
6	message	text	YES			

public.lesson_words

Reihenfolge von Wörtern innerhalb einer Lesson.

#	Column	Type	Null	PK	Default	Description
1	lesson_id	uuid	NO	YES		
2	word_id	uuid	NO	YES		
3	order_index	integer	NO		0	

Foreign Keys

- lesson_words_lesson_id_fkey: (lesson_id) -> public.lessons (id) · on update NO ACTION · on delete CASCADE
- lesson_words_word_id_fkey: (word_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

public.lessons

Kuratiertes Set (Titel, Kategorie, Reihenfolge).

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES	gen_random_uuid()	
2	title	text	NO			
3	category_id	uuid	YES			
4	order_index	integer	NO		0	
5	created_at	timestamp with time zone	NO		now()	

Foreign Keys

- lessons_category_fkey: (category_id) -> public.categories (id) · on update NO ACTION · on delete SET NULL
- lessons_category_id_fkey: (category_id) -> public.categories (id) · on update NO ACTION · on delete SET NULL

public.profiles

App-Profil je User (z. B. capture_key).

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES		
2	created_at	timestamp with time zone	YES		now()	
3	capture_key	text	YES			

Foreign Keys

- profiles_id_fkey: (id) -> auth.users (id) · on update NO ACTION · on delete CASCADE

public.single_session_items

Einmal-Session-Queue (Bucket, Stage) ohne Persistenz in SRS.

#	Column	Type	Null	PK	Default	Description
1	user_id	uuid	NO	YES	auth.uid()	
2	category_id	uuid	NO	YES		
3	stage	integer	NO	YES		
4	word_id	uuid	NO	YES		
5	bucket	text	NO			
6	created_at	timestamp with time zone	NO		now()	

public.staging_words

Import-Zwischentabelle (CSV/Batch), wird in words überführt.

#	Column	Type	Null	PK	Default	Description
1	text	text	NO			
2	translation	text	NO			
3	from_lang	text	NO		'en':text	
4	to_lang	text	NO		'de':text	
5	level	text	YES			
6	pos	text	YES			
7	category_slug	text	NO			
8	subdomain	text	YES			

public.user_daily_picks

Tägliche Push-Auswahl je User (Scheduling & Versandzeit).

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES	gen_random_uuid()	
2	user_id	uuid	NO			
3	word_id	uuid	NO			
4	scheduled_for	date	YES			Geplanter Tag für Push/Reminder.
5	sent_at	timestamp with time zone	YES			
6	created_at	timestamp with time zone	NO		now()	

Foreign Keys

- user_daily_picks_user_id_fkey: (user_id) -> auth.users (id) · on update NO ACTION · on delete CASCADE
- user_daily_picks_word_id_fkey: (word_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

public.user_words

RLS: user_id = auth.uid().

#	Column	Type	Null	PK	Default	Description
1	user_id	uuid	NO	YES		
2	word_id	uuid	NO	YES		
3	picked	boolean	NO		true	
4	favorite	boolean	NO		false	
5	created_at	timestamp with time zone	NO		now()	

#	Column	Type	Null	PK	Default	Description
6	srs_stage	smallint	NO		0	Aktuelle SRS-Stufe (z. B. 0–5).
7	next_due_at	timestamp with time zone	YES			Nächster Wiederholzeitpunkt (Scheduler).
8	last_reviewed_at	timestamp with time zone	YES			Zeitpunkt der letzten Wiederholung.
9	last_result	boolean	YES			
10	source	text	YES		‘app’::text	

Foreign Keys

- user_words_user_id_fkey: (user_id) -> auth.users (id) · on update NO ACTION · on delete CASCADE
- user_words_word_id_fkey: (word_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

public.word_categories

N:M-Link: words <-> categories.

#	Column	Type	Null	PK	Default	Description
1	word_id	uuid	NO	YES		FK -> words.id
2	category_id	uuid	NO	YES		FK -> categories.id
3	created_at	timestamp with time zone	NO		now()	

Foreign Keys

- word_categories_category_fkey: (category_id) -> public.categories (id) · on update NO ACTION · on delete CASCADE
- word_categories_category_id_fkey: (category_id) -> public.categories (id) · on update NO ACTION · on delete CASCADE
- word_categories_word_id_fkey: (word_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

public.words

Master-Lexikon: jedes Wort einmal, Sprache/Pos/Level, Metadaten (QA, Tags).

#	Column	Type	Null	PK	Default	Description
1	id	uuid	NO	YES	gen_random_uuid()	
2	text	text	NO			Grundform/Token (engl.).
3	translation	text	NO			Standard-Übersetzung (z. B. de).
4	from_lang	text	NO			
5	to_lang	text	NO			
6	domain	text	YES			
7	pos	text	YES			Part of Speech (noun, verb, adj, ...).
8	level	text	YES			CEFR-Level (A1–C2) oder custom.
9	tags	text[]	YES		{‘}’::text[]	

#	Column	Type	Null	PK	Default	Description
11	srs_stage	integer	YES		0	
12	created_at	timestamp with time zone	YES		now()	
13	due_at	timestamp with time zone	YES			
14	translated_by	text	YES			
15	translated_at	timestamp with time zone	YES			
16	qa_score	numeric	YES			
17	qa_note	text	YES			