

# Talvori Database Structure


Andreas Warda

04.11.2025

## Contents

|                                       |   |
|---------------------------------------|---|
| Talvori – Database Structure          | 1 |
| Talvori – Data Dictionary (public)    | 3 |
| Talvori – Data Dictionary (public)    | 3 |
| public.captures . . . . .             | 3 |
| public.categories . . . . .           | 3 |
| public.entries . . . . .              | 3 |
| public.ingest_errors . . . . .        | 4 |
| public.lesson_words . . . . .         | 4 |
| public.lessons . . . . .              | 5 |
| public.profiles . . . . .             | 5 |
| public.single_session_items . . . . . | 5 |
| public.staging_words . . . . .        | 6 |
| public.user_daily_picks . . . . .     | 6 |
| public.user_words . . . . .           | 6 |
| public.word_categories . . . . .      | 7 |
| public.words . . . . .                | 7 |

Talvori – Database Structure

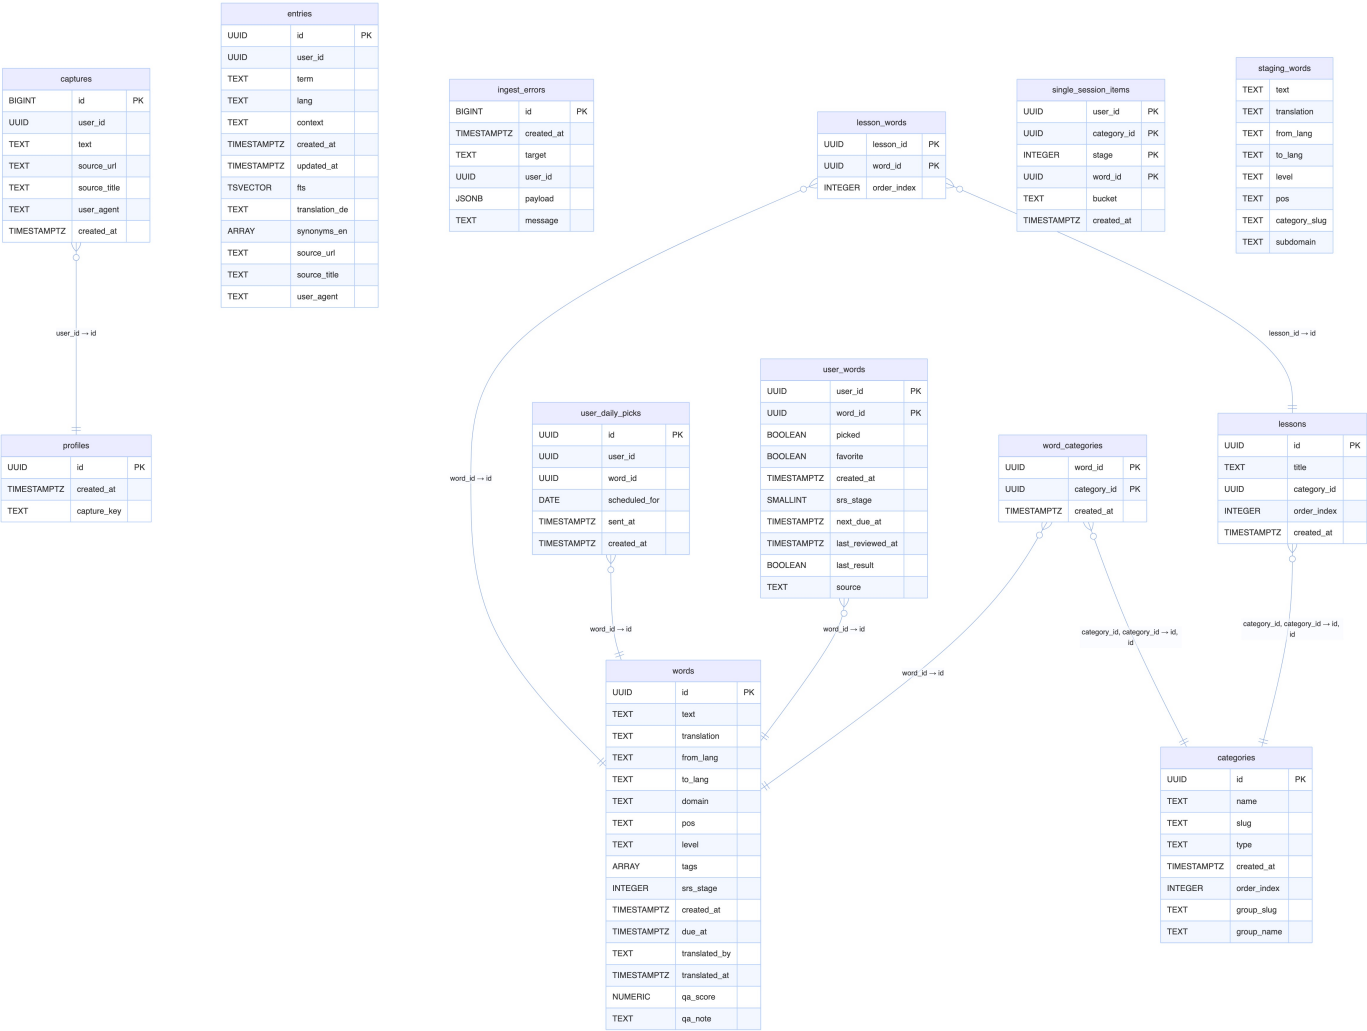

Generiert: 2025-11-04 12:34

public.captures

RLS: user\_id = auth.uid().

| # | Column       | Type                     | Null | PK  | Default                              | Description |
|---|--------------|--------------------------|------|-----|--------------------------------------|-------------|
| 1 | id           | bigint                   | NO   | YES | nextval('captures_id_seq'::regclass) |             |
| 2 | user_id      | uuid                     | NO   |     |                                      |             |
| 3 | text         | text                     | NO   |     |                                      |             |
| 4 | source_url   | text                     | YES  |     |                                      |             |
| 5 | source_title | text                     | YES  |     |                                      |             |
| 6 | user_agent   | text                     | YES  |     |                                      |             |
| 7 | created_at   | timestamp with time zone | YES  |     | now()                                |             |

Foreign Keys

- captures\_user\_id\_fkey: (user\_id) -> public.profiles (id) · on update NO ACTION · on delete CASCADE

public.categories

Vokabel-Gruppierungen (CEFR, Topics, Domains); steuernde Reihenfolge.

| # | Column      | Type                     | Null | PK  | Default           | Description                      |
|---|-------------|--------------------------|------|-----|-------------------|----------------------------------|
| 1 | id          | uuid                     | NO   | YES | gen_random_uuid() |                                  |
| 2 | name        | text                     | NO   |     |                   |                                  |
| 3 | slug        | text                     | NO   |     |                   |                                  |
| 4 | type        | text                     | NO   |     |                   | z. B. 'cefr', 'topic', 'domain'. |
| 5 | created_at  | timestamp with time zone | NO   |     | now()             |                                  |
| 6 | order_index | integer                  | YES  |     |                   |                                  |
| 7 | group_slug  | text                     | YES  |     |                   |                                  |
| 8 | group_name  | text                     | YES  |     |                   |                                  |

public.entries

RLS: user\_id = auth.uid().

| # | Column | Type | Null | PK  | Default           | Description |
|---|--------|------|------|-----|-------------------|-------------|
| 1 | id     | uuid | NO   | YES | gen_random_uuid() |             |

| #  | Column         | Type                        | Null | PK | Default                                                                                                                 | Description              |
|----|----------------|-----------------------------|------|----|-------------------------------------------------------------------------------------------------------------------------|--------------------------|
| 2  | user_id        | uuid                        | NO   |    |                                                                                                                         |                          |
| 3  | term           | text                        | NO   |    |                                                                                                                         |                          |
| 4  | lang           | text                        | YES  |    | 'de'::text                                                                                                              |                          |
| 5  | context        | text                        | YES  |    |                                                                                                                         |                          |
| 6  | created_at     | timestamp with<br>time zone | YES  |    | now()                                                                                                                   |                          |
| 7  | updated_at     | timestamp with<br>time zone | YES  |    | now()                                                                                                                   |                          |
| 8  | fts            | tsvector                    | YES  |    | to_tsvector('simple'::regconfig,<br>((COALESCE(term,<br>' '::text)    ' '::text)    COA-<br>LESCE(context, ' '::text))) | Volltextindex für Suche. |
| 9  | translation_de | text                        | YES  |    |                                                                                                                         |                          |
| 10 | synonyms_en    | text[]                      | YES  |    | '{}'::text[]                                                                                                            |                          |
| 11 | source_url     | text                        | YES  |    |                                                                                                                         |                          |
| 12 | source_title   | text                        | YES  |    |                                                                                                                         |                          |
| 13 | user_agent     | text                        | YES  |    |                                                                                                                         |                          |

#### public.ingest\_errors

Fehlerprotokoll beim Import/Parsing.

| # | Column     | Type                        | Null | PK  | Default                                   | Description |
|---|------------|-----------------------------|------|-----|-------------------------------------------|-------------|
| 1 | id         | bigint                      | NO   | YES | nextval('ingest_errors_id_seq'::regclass) |             |
| 2 | created_at | timestamp with<br>time zone | YES  |     | now()                                     |             |
| 3 | target     | text                        | YES  |     |                                           |             |
| 4 | user_id    | uuid                        | YES  |     |                                           |             |
| 5 | payload    | jsonb                       | YES  |     |                                           |             |
| 6 | message    | text                        | YES  |     |                                           |             |

#### public.lesson\_words

Reihenfolge von Wörtern innerhalb einer Lesson.

| # | Column      | Type    | Null | PK  | Default | Description |
|---|-------------|---------|------|-----|---------|-------------|
| 1 | lesson_id   | uuid    | NO   | YES |         |             |
| 2 | word_id     | uuid    | NO   | YES |         |             |
| 3 | order_index | integer | NO   |     | 0       |             |

#### Foreign Keys

- lesson\_words\_lesson\_id\_fkey: (lesson\_id) -> public.lessons (id) · on update NO ACTION · on delete CASCADE
- lesson\_words\_word\_id\_fkey: (word\_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

## public.lessons

Kuratiertes Set (Titel, Kategorie, Reihenfolge).

| # | Column      | Type                     | Null | PK  | Default           | Description |
|---|-------------|--------------------------|------|-----|-------------------|-------------|
| 1 | id          | uuid                     | NO   | YES | gen_random_uuid() |             |
| 2 | title       | text                     | NO   |     |                   |             |
| 3 | category_id | uuid                     | YES  |     |                   |             |
| 4 | order_index | integer                  | NO   |     | 0                 |             |
| 5 | created_at  | timestamp with time zone | NO   |     | now()             |             |

## Foreign Keys

- lessons\_category\_fkey: (category\_id) -> public.categories (id) · on update NO ACTION · on delete SET NULL
- lessons\_category\_id\_fkey: (category\_id) -> public.categories (id) · on update NO ACTION · on delete SET NULL

## public.profiles

App-Profil je User (z. B. capture\_key).

| # | Column      | Type                     | Null | PK  | Default | Description |
|---|-------------|--------------------------|------|-----|---------|-------------|
| 1 | id          | uuid                     | NO   | YES |         |             |
| 2 | created_at  | timestamp with time zone | YES  |     | now()   |             |
| 3 | capture_key | text                     | YES  |     |         |             |

## Foreign Keys

- profiles\_id\_fkey: (id) -> auth.users (id) · on update NO ACTION · on delete CASCADE

## public.single\_session\_items

Einmal-Session-Queue (Bucket, Stage) ohne Persistenz in SRS.

| # | Column      | Type                     | Null | PK  | Default    | Description |
|---|-------------|--------------------------|------|-----|------------|-------------|
| 1 | user_id     | uuid                     | NO   | YES | auth.uid() |             |
| 2 | category_id | uuid                     | NO   | YES |            |             |
| 3 | stage       | integer                  | NO   | YES |            |             |
| 4 | word_id     | uuid                     | NO   | YES |            |             |
| 5 | bucket      | text                     | NO   |     |            |             |
| 6 | created_at  | timestamp with time zone | NO   |     | now()      |             |

## public.staging\_words

Import-Zwischentabelle (CSV/Batch), wird in words überführt.

| # | Column        | Type | Null | PK | Default   | Description |
|---|---------------|------|------|----|-----------|-------------|
| 1 | text          | text | NO   |    |           |             |
| 2 | translation   | text | NO   |    |           |             |
| 3 | from_lang     | text | NO   |    | 'en':text |             |
| 4 | to_lang       | text | NO   |    | 'de':text |             |
| 5 | level         | text | YES  |    |           |             |
| 6 | pos           | text | YES  |    |           |             |
| 7 | category_slug | text | NO   |    |           |             |
| 8 | subdomain     | text | YES  |    |           |             |

## public.user\_daily\_picks

Tägliche Push-Auswahl je User (Scheduling & Versandzeit).

| # | Column        | Type                     | Null | PK  | Default           | Description                      |
|---|---------------|--------------------------|------|-----|-------------------|----------------------------------|
| 1 | id            | uuid                     | NO   | YES | gen_random_uuid() |                                  |
| 2 | user_id       | uuid                     | NO   |     |                   |                                  |
| 3 | word_id       | uuid                     | NO   |     |                   |                                  |
| 4 | scheduled_for | date                     | YES  |     |                   | Geplanter Tag für Push/Reminder. |
| 5 | sent_at       | timestamp with time zone | YES  |     |                   |                                  |
| 6 | created_at    | timestamp with time zone | NO   |     | now()             |                                  |

## Foreign Keys

- user\_daily\_picks\_user\_id\_fkey: (user\_id) -> auth.users (id) · on update NO ACTION · on delete CASCADE
- user\_daily\_picks\_word\_id\_fkey: (word\_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

## public.user\_words

RLS: user\_id = auth.uid().

| # | Column     | Type                     | Null | PK  | Default | Description |
|---|------------|--------------------------|------|-----|---------|-------------|
| 1 | user_id    | uuid                     | NO   | YES |         |             |
| 2 | word_id    | uuid                     | NO   | YES |         |             |
| 3 | picked     | boolean                  | NO   |     | true    |             |
| 4 | favorite   | boolean                  | NO   |     | false   |             |
| 5 | created_at | timestamp with time zone | NO   |     | now()   |             |

| #  | Column           | Type                     | Null | PK | Default     | Description                              |
|----|------------------|--------------------------|------|----|-------------|------------------------------------------|
| 6  | srs_stage        | smallint                 | NO   |    | 0           | Aktuelle SRS-Stufe (z. B. 0–5).          |
| 7  | next_due_at      | timestamp with time zone | YES  |    |             | Nächster Wiederholzeitpunkt (Scheduler). |
| 8  | last_reviewed_at | timestamp with time zone | YES  |    |             | Zeitpunkt der letzten Wiederholung.      |
| 9  | last_result      | boolean                  | YES  |    |             |                                          |
| 10 | source           | text                     | YES  |    | 'app'::text |                                          |

#### Foreign Keys

- user\_words\_user\_id\_fkey: (user\_id) -> auth.users (id) · on update NO ACTION · on delete CASCADE
- user\_words\_word\_id\_fkey: (word\_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

#### public.word\_categories

N:M-Link: words <-> categories.

| # | Column      | Type                     | Null | PK  | Default | Description         |
|---|-------------|--------------------------|------|-----|---------|---------------------|
| 1 | word_id     | uuid                     | NO   | YES |         | FK -> words.id      |
| 2 | category_id | uuid                     | NO   | YES |         | FK -> categories.id |
| 3 | created_at  | timestamp with time zone | NO   |     | now()   |                     |

#### Foreign Keys

- word\_categories\_category\_fkey: (category\_id) -> public.categories (id) · on update NO ACTION · on delete CASCADE
- word\_categories\_category\_id\_fkey: (category\_id) -> public.categories (id) · on update NO ACTION · on delete CASCADE
- word\_categories\_word\_id\_fkey: (word\_id) -> public.words (id) · on update NO ACTION · on delete CASCADE

#### public.words

Master-Lexikon: jedes Wort einmal, Sprache/Pos/Level, Metadaten (QA, Tags).

| # | Column      | Type   | Null | PK  | Default           | Description                            |
|---|-------------|--------|------|-----|-------------------|----------------------------------------|
| 1 | id          | uuid   | NO   | YES | gen_random_uuid() |                                        |
| 2 | text        | text   | NO   |     |                   | Grundform/Token (engl.).               |
| 3 | translation | text   | NO   |     |                   | Standard-Übersetzung (z. B. de).       |
| 4 | from_lang   | text   | NO   |     |                   |                                        |
| 5 | to_lang     | text   | NO   |     |                   |                                        |
| 6 | domain      | text   | YES  |     |                   |                                        |
| 7 | pos         | text   | YES  |     |                   | Part of Speech (noun, verb, adj, ...). |
| 8 | level       | text   | YES  |     |                   | CEFR-Level (A1–C2) oder custom.        |
| 9 | tags        | text[] | YES  |     | '{}'::text[]      |                                        |

| #  | Column        | Type                     | Null | PK | Default | Description |
|----|---------------|--------------------------|------|----|---------|-------------|
| 11 | srs_stage     | integer                  | YES  |    | 0       |             |
| 12 | created_at    | timestamp with time zone | YES  |    | now()   |             |
| 13 | due_at        | timestamp with time zone | YES  |    |         |             |
| 14 | translated_by | text                     | YES  |    |         |             |
| 15 | translated_at | timestamp with time zone | YES  |    |         |             |
| 16 | qa_score      | numeric                  | YES  |    |         |             |
| 17 | qa_note       | text                     | YES  |    |         |             |