

# GPW WATS 4.01 Drop Copy Gateway (FIX 5.0).

Date: 15.01.2024 | Version: GPW0.59

# CONTENTS

|                      |          |
|----------------------|----------|
| <b>Contents.....</b> | <b>2</b> |
|----------------------|----------|

|                            |          |
|----------------------------|----------|
| <b>1. Disclaimer .....</b> | <b>3</b> |
|----------------------------|----------|

|                        |          |
|------------------------|----------|
| <b>2. Preface.....</b> | <b>3</b> |
|------------------------|----------|

|                          |   |
|--------------------------|---|
| 2.1 Target Audience..... | 4 |
|--------------------------|---|

|                           |   |
|---------------------------|---|
| 2.2 Document Purpose..... | 4 |
|---------------------------|---|

|                               |   |
|-------------------------------|---|
| 2.3 Associated Documents..... | 4 |
|-------------------------------|---|

|                                  |          |
|----------------------------------|----------|
| <b>3. Document History .....</b> | <b>5</b> |
|----------------------------------|----------|

|                                     |          |
|-------------------------------------|----------|
| <b>4. Service Description .....</b> | <b>6</b> |
|-------------------------------------|----------|

|                                                  |   |
|--------------------------------------------------|---|
| 4.1 Drop Copy Gateway Service Introduction ..... | 6 |
|--------------------------------------------------|---|

|                                         |   |
|-----------------------------------------|---|
| 4.2 Drop Copy Gateway Information Scope | 7 |
|-----------------------------------------|---|

|                   |   |
|-------------------|---|
| 4.3 Parties ..... | 7 |
|-------------------|---|

|                                                |          |
|------------------------------------------------|----------|
| <b>5. Drop Copy Gateway Configuration.....</b> | <b>9</b> |
|------------------------------------------------|----------|

|                                 |   |
|---------------------------------|---|
| 5.1 Connection Information..... | 9 |
|---------------------------------|---|

|                                 |   |
|---------------------------------|---|
| 5.2 Service Configuration ..... | 9 |
|---------------------------------|---|

|                                 |   |
|---------------------------------|---|
| 5.3 Failover And Recovery ..... | 9 |
|---------------------------------|---|

|                               |           |
|-------------------------------|-----------|
| <b>6. Session Layer .....</b> | <b>10</b> |
|-------------------------------|-----------|

|                                     |    |
|-------------------------------------|----|
| 6.1 Drop Copy Session Messages..... | 10 |
|-------------------------------------|----|

|                                   |           |
|-----------------------------------|-----------|
| <b>7. Application Layer .....</b> | <b>11</b> |
|-----------------------------------|-----------|

|                                                  |    |
|--------------------------------------------------|----|
| 7.1 Drop Copy Gateway Application Messages ..... | 11 |
|--------------------------------------------------|----|

|                         |    |
|-------------------------|----|
| 7.2 Behavior Model..... | 11 |
|-------------------------|----|

|                                |           |
|--------------------------------|-----------|
| <b>8. Message Formats.....</b> | <b>12</b> |
|--------------------------------|-----------|

## 1. DISCLAIMER

---

This document is for information purposes only and does not form any part of contractual documentation. Reasonable care has been taken to ensure details contained within are accurate and not misleading at the time of publication. Warsaw Stock Exchange is not responsible for any errors or omissions contained in this document.

Warsaw Stock Exchange reserves the right to treat information contained in this document subject to later change without prior notice. This document contains confidential information to Warsaw Stock Exchange and may not be reproduced, disclosed, or used in whole or part, in any manner, without prior written consent from the owner of this document. Information included in this document shall be maintained and exercised with adequate security measures necessary to protect confidential information from unauthorized access or disclosure.

## 2. PREFACE

---

This document has been prepared by Warsaw Stock Exchange in order to help in the implementation process of GPW WATS trading platform.

This section describes the basic information about the FIX Drop Copy Gateway document. You will become acquainted with the target audience, the document's purpose and all necessary documents you should read in conjunction with this Protocol specification. You will also find information in this document about the service order procedure, the Drop Copy scheme and associated use cases.

### 2.1 TARGET AUDIENCE

---

This document has been prepared to development staff, Independent Software Vendors who produce software integrated with GPW WATS, analysts, market participants and all clients who want to deepen their knowledge about GPW WATS.

### 2.2 DOCUMENT PURPOSE

---

This document provides a description of FIX Drop Copy Gateway available in GPW WATS.

### 2.3 ASSOCIATED DOCUMENTS

---

GPW WATS 4.01 Drop Copy Gateway (FIX 5.0) is a part of GPW WATS documentation set.

Please check the following documents to learn about the construction of Trading System.

- GPW WATS 1.01 Trading System

Please check the documentation of the trading protocols supported by GPW WATS.

- GPW WATS 2.01 Native Order Gateway Specification
- GPW WATS 2.02 FIX Order Gateway Specification.

Please check the description of the communication with Data Distribution Service.

- GPW WATS 3.01 Market Data Protocol

Please check the additional documentation which explains other services provided within GPW WATS.

- GPW WATS 4.01 Drop Copy Gateway (this document)
- GPW WATS 4.02 Post Trade Gateway
- GPW WATS 5.01 Risk Management Gateway.

Please check the additional documentation describing the following:

- GPW WATS 2.03 Rejection Codes,
- GPW WATS 2.04 BenDec Message Definition Format,
- GPW WATS 6.01 Connectivity.

It is recommended that you read the GPW WATS 1.01 Trading System document first.

### 3. DOCUMENT HISTORY

| Version     | Date       | Description                                   |
|-------------|------------|-----------------------------------------------|
| <b>0.51</b> | 29.06.2023 | The initial publication of the documentation. |
| <b>0.52</b> | 26.07.2023 | Publication of version 0.52.                  |
| <b>0.53</b> | 16.08.2023 | Publication of version 0.53.                  |
| <b>0.54</b> | 20.09.2023 | Publication of version 0.54.                  |
| <b>0.55</b> | 16.10.2023 | Publication of version 0.55.                  |
| <b>0.56</b> | 08.11.2023 | Publication of version 0.56.                  |
| <b>0.57</b> | 30.11.2023 | Figure 1 updated. Minor editorial changes.    |
| <b>0.58</b> | 14.12.2023 | Publication of version 0.58.                  |
| <b>0.59</b> | 15.01.2024 | Publication of version 0.59.                  |


## 4. SERVICE DESCRIPTION

This chapter presents the basic drop copy mechanism within GPW WATS. It provides an overview of the service, including common issues, involved parties, supported events and service protocol. The information is presented in the broader context of the system gateways. In addition this specification includes practical examples to extend understanding of the FIX Drop Copy Gateway.

### 4.1. DROP COPY GATEWAY SERVICE INTRODUCTION

Drop Copy Gateway is an integral module within GPW WATS system that allows reporting activities of given exchange member users. Drop Copy enables replication of orders and/or trades reports in real-time manner and provides copies with the data directly to Trading Members. In the diagram below the drop copy service is presented in the context of other GPW WATS services.

Figure 1. GPW WATS Services

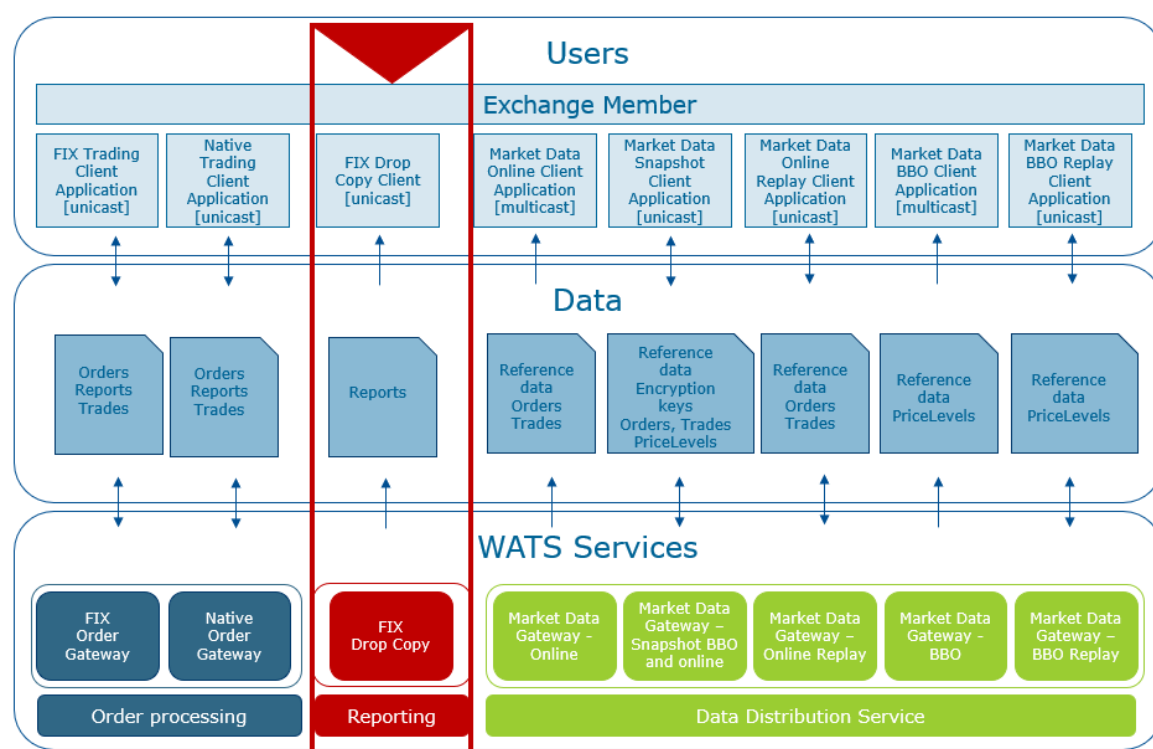

Drop Copy Gateway (DC) are forms of safeguards against order and trade loss. The service allows real-time receipt of execution and transaction reports of an exchange member. Drop Copy Gateway does not allow for order submission. Each exchange member is responsible for designing and maintaining Drop Copy Gateway access architecture.

The service implements FIX 5.0 SP2 protocol.


In summary, Drop Copy Gateway allows Participants to improve maintenance and adequacy of the data through an ongoing distribution of a copy of back office information.



## 4.2. DROP COPY GATEWAY INFORMATION SCOPE

Configuration of the service is performed by the system operator. The configuration scope includes determining the list of Native or FIX Order Gateway connections monitored within the service, as well as the information scope divided into order execution and transaction reports. FIX Drop Copy Gateway has been designed for Trading Members only.

Drop Copy Gateway functionality enables the configuration of different data ranges received, including order execution reports, regular transaction reports, and block transaction reports, as depicted in the diagram below:

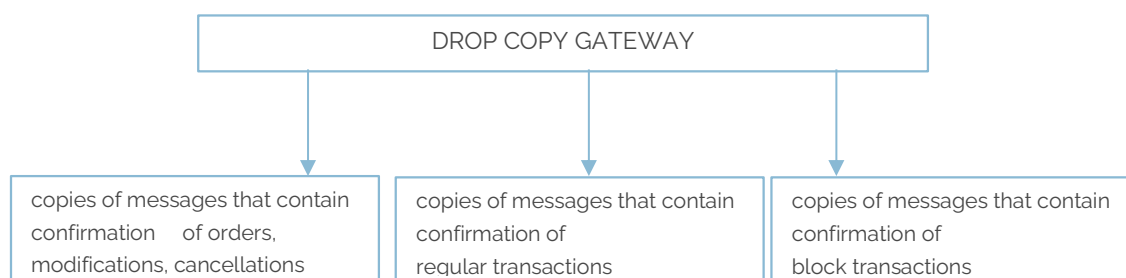

The drop copy aggregates transaction and order confirmation messages within its connection from the users of a given exchange member.

## 4.3. PARTIES

The parties involved in reported orders and transactions are consistent with the messages sent to the Order Gateways, specifically for orders and regular transactions the following roles are used in the Party (453) group:

- Client ID,
- Executing Trader,
- Investment Decision Maker,
- Clearing Firm.

For block transactions, additional information about the Contra Firm is provided.

Below is an example of the Party group:

A FIX message fragment:

```
453=3|448=4294967212|447=P|452=3|2376=24|448=3294967200|447=P|452=12|2376=22|448=5483847|447=P|452=122|2376=24|
```

The table below provides a fields description:

| Field                     | Description               |
|---------------------------|---------------------------|
| <b>NoPartyIDs</b>         | 3                         |
| <b>PartyIDSource</b>      | SHORT_CODE_IDENTIFIER (P) |
| <b>PartyID</b>            | 4294967212                |
| <b>PartyRole</b>          | CLIENT_ID (3)             |
| <b>PartyRoleQualifier</b> | NATURAL_PERSON (24)       |

| Field              | Description                     |
|--------------------|---------------------------------|
| PartyIDSource      | SHORT_CODE_IDENTIFIER (P)       |
| PartyID            | 3294967200                      |
| PartyRole          | EXECUTING_TRADER (12)           |
| PartyRoleQualifier | ALGORITHM (22)                  |
| PartyIDSource      | SHORT_CODE_IDENTIFIER (P)       |
| PartyID            | 5483847                         |
| PartyRole          | INVESTMENT_DECISION_MAKER (122) |
| PartyRoleQualifier | NATURAL_PERSON (24)             |

From a communication perspective, it is important to note the slightly different usage of COMPID compared to the base message sent to Order Gateways. The COMPID fields utilized in Drop Copy Gateway are provided below:

| Field            | Description                                                                                                                                                                                                                                                                   |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TargetCompID     | An exchange member Drop Copy Gateway user COMP ID                                                                                                                                                                                                                             |
| SenderCompID     | A Drop Copy Gateway service COMP ID                                                                                                                                                                                                                                           |
| OnBehalfOfCompID | An connection identification of exchange member trading user, who is the primary recipient of the message. In the case of an FIX Gateway connection, it will be COMP_ID, and in the case of a Native Gateway connection, it will be information containing the connection id. |



## 5. DROP COPY GATEWAY CONFIGURATION

---

This chapter provides service configuration and connectivity information.

### 5.1. CONNECTION INFORMATION

---

The Drop Copy Gateway is a TCP/IP service. In order to establish a connection, it is necessary to obtain the IP address and port number.

Establishing a session with GPW WATS requires FIX protocol compliant login e.i. sending a Logon (A) message. To do this, it is necessary to have a SenderCompID (49), TargetCompID (56) and the token placed at RawData (96) field. You cannot log in with the same credentials multiple times.

The above parameters will be provided by the system operator.

A sample logon message with fields separated by '|' mark:

```
8=FIXT.1.1|9=94|35=A|49=2_1473|56=n8_fix_dc|34=1|52=20230421-  
05:27:53.191|95=8|96=ABCDEFGH|98=0|108=30|1137=9|10=026|
```

All parameters required for the connectivity group to connect to GPW WATS can be found in the document GPW WATS 6.01 Connectivity.

### 5.2. SERVICE CONFIGURATION

---

As mentioned above, configuration of the service is performed by the system operator. An exchange member should specify which trading connections will be monitored by the drop copy service to retransmit reports.

Next, for each trading connection, the exchange member should provide the expected informational scope. It is possible to receive all order and transaction reports, but it is also possible to narrow down the information to only orders or transactions, including block transactions.

### 5.3. FAILOVER AND RECOVERY

---

Due to reduction of operational risk within GPW WATS, the failover and recovery mechanism has been designed.

When there is temporary and short unavailability of Gateway, the exchange member should attempt to re-establish the connection and login to Gateway. Subsequently the messages will be resynchronized between the exchange member and Gateway based on the typical FIX protocol resend mechanism.

When there is a long-term unavailability of the primary Gateway, the procedure of switching to a secondary will be launched. In such a situation, the exchange member will receive information from the system operator about the need to switch to the secondary Gateway. The connection will be established with the same login parameters but on a new IP address and port number. After logging in, messages will be recovered at the business level.

## 6. SESSION LAYER

---

The primary objective of this chapter is to provide information on how the service functions within the context of FIX sessions.

### 6.1. DROP COPY SESSION MESSAGES

---

The following session messages have been defined for Drop Copy Gateway:

- Logon (A)
- Logout (5)
- ResendRequest (2)
- SequenceReset (4)
- Reject (3)
- Heartbeat (0)
- TestRequest (1)

Authentication for Drop Copy sessions is carried out as previously mentioned (refer to the Connection Information section).

## 7. APPLICATION LAYER

The primary objective of this chapter is to provide information on how the service functions within the context of application usage.

### 7.1. DROP COPY GATEWAY APPLICATION MESSAGES


The following application messages have been defined for the Drop Copy service:

- Execution Report
- Mass Quote Acknowledgement
- Trade Capture Report

### 7.2. BEHAVIOR MODEL

Drop Copy Gateway offers near real-time replicas of order and transaction reports, which ensure minimal intentional delays. The diagram below illustrates the typical behaviour of Gateway:

Figure 1 Drop Copy – behaviour model

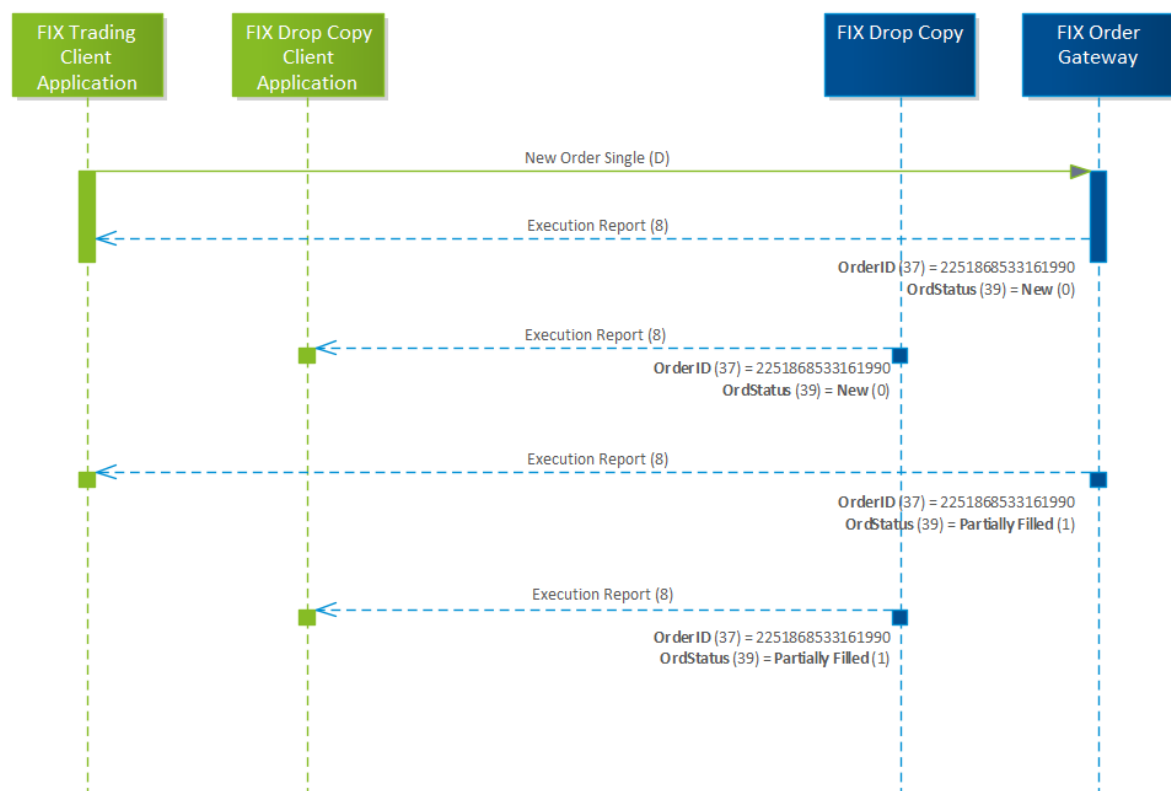

## 8. MESSAGE FORMATS

---

The informational scope of messages used in Drop Copy service is the same as in FIX Order Gateway. To familiarize yourself with the specification at the level of individual message fields, please refer to document GPW WATS 2.02 FIX Order Gateway Specification (FIX 5.0).