

GPW WATS 4.02

Post Trade Gateway

(FIX 5.0).

Date: 15.01.2024 | Version: GPW0.59

CONTENTS

Contents.....	2
----------------------	----------

1. Disclaimer	3
----------------------------	----------

2. Preface.....	3
------------------------	----------

2.1. Target Audience.....	4
---------------------------	---

2.2. Document Purpose.....	4
----------------------------	---

2.3. Associated Documents.....	4
--------------------------------	---

3. Document History	5
----------------------------------	----------

4. Service Description	6
-------------------------------------	----------

4.1. Post Trade Gateway Introduction.....	6
---	---

4.2. Usage Scenarios	6
----------------------------	---

5. Supported Message Types.....	8
--	----------

5.1. Session Layer.....	8
-------------------------	---

5.2. Application Layer.....	8
-----------------------------	---

5.3. Trade Capture Report (AE) for Post Trade Gateway	9
---	---

1. DISCLAIMER

This document is for information purposes only and does not form any part of contractual documentation. Reasonable care has been taken to ensure details contained within are accurate and not misleading at the time of publication. Warsaw Stock Exchange is not responsible for any errors or omissions contained in this document.

Warsaw Stock Exchange reserves the right to treat information contained in this document subject to later change without prior notice. This document contains confidential information to Warsaw Stock Exchange and may not be reproduced, disclosed, or used in whole or part, in any manner, without prior written consent from the owner of this document. Information included in this document shall be maintained and exercised with adequate security measures necessary to protect confidential information from unauthorized access or disclosure.

2. PREFACE

This document has been prepared by Warsaw Stock Exchange in order to help in the implementation process of GPW WATS trading platform.

This section describes functionality of GPW WATS Post Trade Gateway (FIX 5.0).

2.1. TARGET AUDIENCE

This document has been prepared to development staff, Independent Software Vendors who produce software integrated with GPW WATS, analysts, market participants and all clients who want to deepen their knowledge about GPW WATS.

2.2. DOCUMENT PURPOSE

This document provides a description of FIX Post Trade Gateway that operates within GPW WATS.

2.3. ASSOCIATED DOCUMENTS

GPW WATS 4.02 Post Trade Gateway (FIX 5.0) is a part of GPW WATS documentation set.

Please check the following documents to learn about the construction of Trading System.

- GPW WATS 1.01 Trading System.

Please check the documentation of the trading protocols supported by GPW WATS.

- GPW WATS 2.01 Native Order Gateway Specification,
- GPW WATS 2.02 FIX Order Gateway Specification.

Please check the description of the communication with Data Distribution Service.

- GPW WATS 3.01 Market Data Protocol.

Please check the additional documentation which explains other services provided within GPW WATS.

- GPW WATS 4.01 Drop Copy Gateway,
- GPW WATS 4.02 Post Trade Gateway (this document),
- GPW WATS 5.01 Risk Management Gateway.

Please check the additional documentation describing the following:

- GPW WATS 2.03 Rejection Codes,
- GPW WATS 2.04 BenDec Message Definition Format,
- GPW WATS 6.01 Connectivity.

It is recommended that you read the GPW WATS 1.01 Trading System document first.


3. DOCUMENT HISTORY

Version	Date	Description
0.51	29.06.2023	The initial publication of the documentation.
0.52	26.07.2023	Publication of v0.52.
0.53	16.08.2023	Publication of v0.53.
0.54	19.09.2023	Trade Capture Report (AE) for Post Trade Gateway added.
0.55	16.10.2023	Publication of v0.55.
0.56	08.11.2023	Publication of v0.56.
0.57	30.11.2023	Table for chapter 5.2 updated. Minor editorial changes.
0.58	15.12.2023	Publication of v0.58.
0.59	15.01.2024	Publication of v0.59.

4. SERVICE DESCRIPTION

The chapter Service Description characterizes Post Trade Gateway (PTG) as a reporting module that operates within GPW WATS. It presents the fundamentals of the service provided by WSE (GPW) as a mechanism that allows to fulfill authorized users a role of a clearing member, receive real-time confirmations about their transactions to be settled during a current trading day

Figure 1. GPW WATS Services

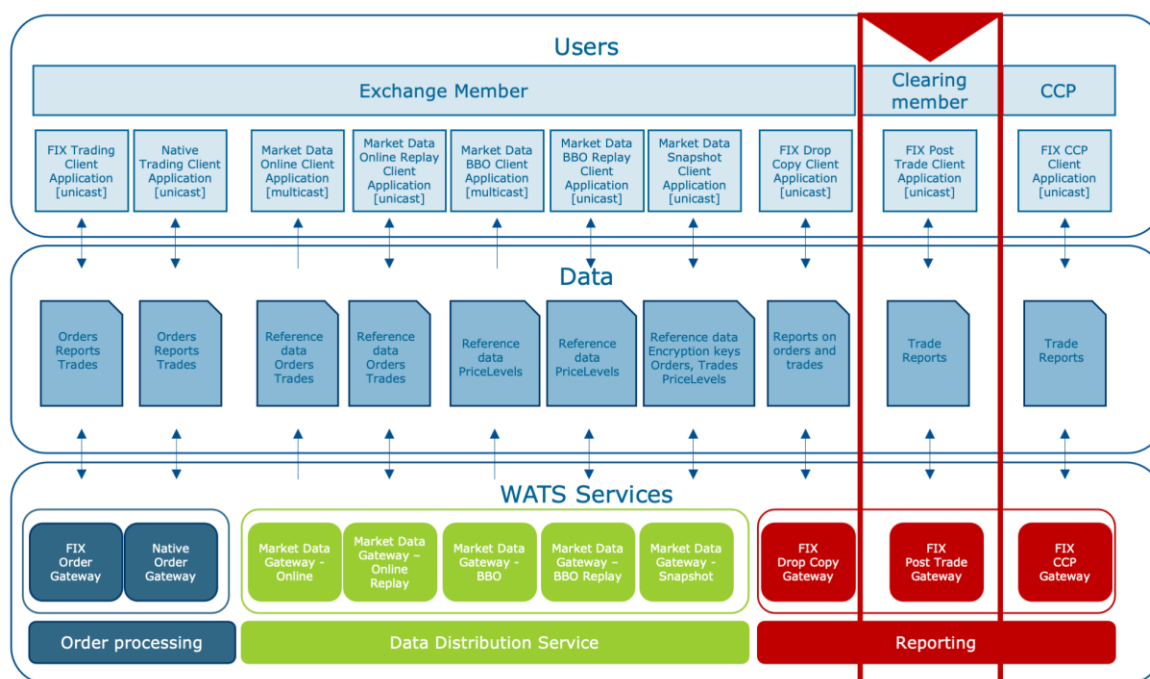

4.1. POST TRADE GATEWAY INTRODUCTION

Post Trade Gateway should enable real-time communication with clearing members. The user only acts as a recipient of the data. Post Trade Gateway does not support order submissions.

The primary objective of the service is to send accurate information about all transactions during a single trading day, including CLOB (on-book) and off-book (block + cross) transactions. The service does not support historical trading data.

Transaction confirmations are disseminated through Trade Capture Reports (AE) as a unidirectional form of communication. The information about cancellation or amendments will be sent in the same way.

The service implements FIX 5.0 SP2 protocol.

4.2. USAGE SCENARIOS

After sending the transaction report for settlement to CCP, Post Trade Gateway immediately sends transaction confirmation to the clearing member. The communication runs parallel to the messages generated and populated through the Order Gateways, such as the FIX - Execution Report (8) and Native - Trade.

Both parties involved in the settled transactions receive individual Trade Capture Reports (AE) with predefined tags, as illustrated in the following example:

TradeReportTransType (487) = 0 (New)


TradeReportType (856) = 0 (Submit)

TradeHandlingInstr (1123) = 0 (Trade Confirmation)

ExecType (150) = F (Trade)

Please see the chart below with the process flow.

Figure 2. Process flow – trade submit.

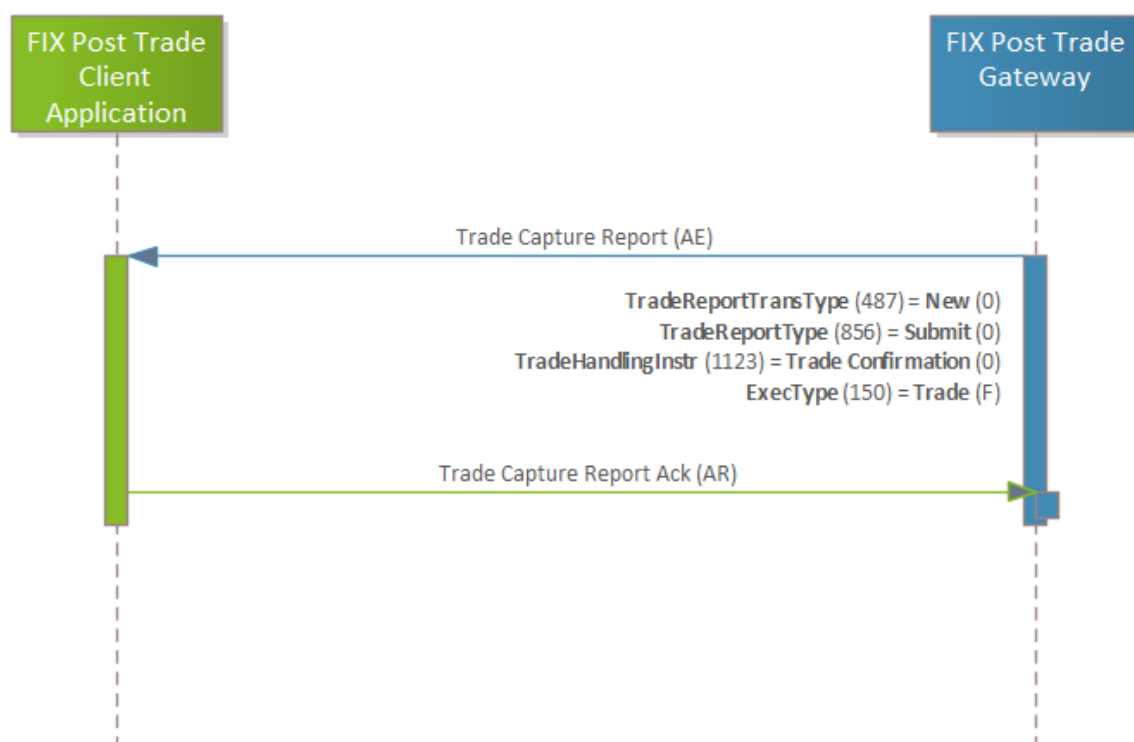

5. SUPPORTED MESSAGE TYPES

As previously mentioned in this document, Post Trade Gateway mechanism is supported by FIX 5.0 SP2. In this chapter you will become acquainted with all kinds of message types that Post Trade Gateway server supports.

5.1. SESSION LAYER

In this section you can find a description of messages that are the components of the session layer. Please note that FIX session layer inside GPW WATS takes place according to the protocol FIX 5.0 SP2. For further information please refer to the document GPW WATS 2.02 FIX Order Gateway Specification (FIX 5.0).

In the context of Post Trade Gateway session layer operates the following messages:

- Logon (A),
- Heartbeat (0),
- Test Request (1),
- Resend Request (2),
- Reject (3),
- Sequence Reset (4),
- Logout (5).

5.2. APPLICATION LAYER

Communication between Participant and Post Trade Gateway is handled via a one-sided Trade Capture Report (AE). You can learn more about the Trade Capture Report (AE) in document GPW WATS 2.02 FIX Order Gateway Specification (FIX 5.0) in the chapter Trade Capture Report.

The table below presents the significant differences applicable to Post Trade Gateway Trade Capture Report (AE):

FIX Tag	Name	Description	TCR Post Trade Gateway
2667	AlgoTradeIndicator	The tag provides information about source of the trade.	The value is mapped from PartyRoleQualifier (2376) as 22 = Algorithm.
1123	TradeHandlingInstr	It defines receiving method of TradeCaptureReport (AE).	Allowed value: 0 = Trade confirmation.
150	ExecType	Represents matter of the report.	Allowed values: F = Trade and H = Trade Cancel
48	SecurityID	ID of the security.	Allowed value: ISIN
22	SecurityIDSource	The tag provides information about class or source related to value in SecurityID (48).	Allowed value: 4 = ISIN
552	NoSides	The value indicates the number of side recurring group instances.	Allowed value: 1 = One Side
447	PartyIDSource	This field provides source of the field PartyID (448). It is only required when value for PartyID is added.	Possible values: P = Short code identifier D = Proprietary / Custom code
1444	SideLiquidityInd	The value can only be input for CLOB trades. The field helps to identify the liquidity provider or liquidity taker.	The value is mapped from Execution Report from field LastLiquidityInd (851). Applicable for CLOB trades.

5.3. TRADE CAPTURE REPORT (AE) FOR POST TRADE GATEWAY

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
C	StandardHeader			R			
571	TradeReportID	string	20 characters	R		Unique identifier of trade capture report.	alphanumeric, 0-9, A-Z, a-z
1003	TradeID	string	20 characters	R		The unique ID assigned to the trade entity once it is received or matched by the exchange or central counterparty.	alphanumeric, 0-9, A-Z, a-z
487	TradeReportTransType	int		R		Identifies Trade Report message transaction type.	0 = New 1 = Cancel
856	TradeReportType	int		R		Type of Trade Report.	0 = Submit 6 = Trade Report Cancel
828	TrdType	int		R		Type of trade.	0 = Regular trade 22 = Privately negotiated trade 38 = Block trade (Large In Scale)
2667	AlgorithmicTradeIndicator	num		R		Indicates that the trade originates from a computer program or algorithm requiring little-to-no human intervention. In the context of ESMA MiFID II, a trade has to be flagged as "algorithmic" if at least one of the matched orders was submitted by a trading algorithm.	0 = Non-algorithmic trade 1 = Algorithmic trade
1123	TradeHandlingInstr	char		R		Specified how the TradeCaptureReport (35-AE) should be handled by the respondent.	0 = Trade confirmation
150	ExecType	char		R		Type of execution being reported. Uses subset of ExecType (150) for trade capture reports.	F = Trade H = Trade Cancel
572	TradeReportRefID	string	20 characters	C	Provided only in case of Trade Cancellations.	Reference identifier used with Cancel and Replace transaction types. The TradeReportID (571) that is being	alphanumeric, 0-9, A-Z, a-z

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
						referenced for trade correction or cancelation.	
1300	MarketSegmentID	string	2 bytes	R		Identifies the market segment.	alphanumeric, 0-9, A-Z
1301	MarketID	string	4 bytes	R		Identifies the market.	alphanumeric, 0-9, A-Z
C	Instrument			R			
48	SecurityID	string	12 bytes	R		Security identifier value of SecurityIDSource (22) type (e.g. ISIN, exchange symbol, etc). Requires SecurityIDSource.	ISIN
22	SecurityIDSource	char	1 character	R		Identifies class or source of the SecurityID (48) value.	4 = ISIN
32	LastQty	num	4 bytes	R		Quantity (e.g. shares) bought/sold on this (last) fill (multiplied by the Lot Size).	integer
31	LastPx	num	12 digits + decimal point	R		Price of this (last) fill.	Floating point number. 6 digits for integer part, decimal point, 6 digits for decimal part. Negative values and 0 allowed.
15	Currency	string	3 bytes	R	It is recommended that systems provide the currency value whenever possible.	Identifies currency used for price. Absence of this field is interpreted as the default for the security.	
60	TransactTime	UTC timestamp		R		Timestamp when the business transaction represented by the message occurred. Time the transaction represented by when this TradeCaptureReport (35-AE) occurred. Execution time of trade. Also describes the time of block trades.	
64	SettlDate	date		R		Specific date of trade settlement (SettlementDate) in YYYYMMDD format.	
573	MatchStatus	num		C		The status of this trade with respect to matching or comparison.	0 = Matched 1 = Unmatched
C	TrdCapRptSideGrp			R			

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
552	NoSides	num		R		Number of Side repeating group instances.	1 = One Side
54	Side	char	1 character	R	Required when NoSides(552) > 0.	Side of order.	1 = buy 2 = sell
	Parties			R			
453	NoPartyIDs	num		R		Number of PartyID (448), PartyIDSource (447), PartyRole (452) and PartyRoleQualifier (2376) entries.	integer
448	PartyID	num	4 bytes	R	Required if NoPartyIDs (453) > 0.	Identification of the party.	integer For clients, the following values are reserved for applicable use: Applicable to PartyRole value 3: 1 = AGGR (an aggregation of multiple client orders) 2 = PNAL (clients are pending allocation) Applicable to PartyRole value 12: 3 = NORE (timing and location of the execution determined by the client of the participant)
447	PartyIDSource			R	Required if NoPartyIDs (453) > 0.	Used to identify classification source.	B = BIC D = Proprietary / Custom code N = Legal Entity Identifier (LEI) P = Short code identifier
452	PartyRole			R	Required if NoPartyIDs (453) > 0.	Identifies the type of PartyID (448).	For PartyIDSource (447) = D : 1 = Executing Firm 4 = Clearing Firm For PartyIDSource (447) = P: 3 = Client ID 12 = Executing Trader 122 = Investment Decision Maker

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
2376	PartyRoleQualifier			R	Required if NoPartyIDs (453) > 0.	Used to further qualify the value of PartyRole (452).	For PartyIDSource (447) = D : 0 = None For PartyIDSource (447) = P: 0 = None (only valid for reserved short codes) 22 = Algorithm (applicable to PartyRole values 12 or 122) 23 = Firm or legal entity (LEI) (applicable to PartyRole value 3) 24 = Natural person (applicable to PartyRole values 3, 12, 122)
1	Account	string	12 or 16 characters	O		Account mnemonic as agreed between buy and sell sides, e.g. broker and institution or investor/intermediary and fund manager.	alphanumeric, 0-9, A-Z, a-z or ASCII 33-126
581	AccountType	num	1 byte	O		Type of account associated with an order.	1 = Account is carried on customer side of the books 3 = House trader
58	Text	string	18 characters	O		Free format text string.	ASCII 32-126
1444	SideLiquidityInd	int		O	Applicable only to CLOB trades, otherwise empty.	Indicator to identify whether this fill was a result of a liquidity provider providing or liquidity taker taking the liquidity.	1 = Added liquidity 2 = Removed liquidity 4 = Auction execution
	TradeReportOrderDetail			O			
37	OrderID	string	20 characters	O	Applicable only to CLOB trades, otherwise empty.	OrderID is required to be unique for each chain of orders. Uniqueness must be guaranteed within a single trading day. Firms which accept multi-day orders should consider embedding a date within the OrderID field to assure uniqueness across days.	alphanumeric, 0-9, A-Z, a-z

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
11	ClOrdID	string	20 characters	O	Applicable only to CLOB trades, otherwise empty.	Unique identifier for order as assigned by the buy-side (institution, broker, intermediary etc. identified by SenderCompID (49) or OnBehalfOfCompID (5) as appropriate). Uniqueness must be guaranteed within a single trading day. Firms, particularly those which electronically submit multi-day orders, trade globally or throughout market close periods, should ensure uniqueness across days, for example by embedding a date within the ClOrdID field.	alphanumeric, 0-9, A-Z, a-z
528	OrderCapacity	char	1 character	R		Designates the capacity of the firm placing the order.	A = Agency (mapped to AOTC) P = Principal (mapped to DEAL) R = Riskless Principal (mapped to MTCH)
529	OrderRestrictions	char	1 character	O		Restrictions associated with an order.	5 = Acting as Market Maker or Specialist in the security
1724	OrderOrigination	int		O		Identifies the origin of the order.	5 = Order received from a direct access or sponsored access customer
	OrderAttributeGrp						
2593	NoOrderAttributes	num	1 byte	R		Number of order attribute entries.	
2594	OrderAttributeType	num	1 byte	R		The type of order attribute.	2 = Liquidity provision activity order
2595	OrderAttributeValue	char	1 character	R		The value associated with the order attribute type specified in OrderAttributeType (2594).	Y = Yes N = No
C	TrdRegPublicationGrp						
2668	NoTrdRegPublications	num	1 byte	R		Number of regulatory publication rules in repeating group.	0 or 1
2669	TrdRegPublicationType	int		O	Provided if NoTrdRegPublications (2668) = 1.	Specifies the type of regulatory trade publication. Additional reasons for the publication type may be specified in TrdRegPublicationReason (2670).	0 = Pre-trade transparency waiver

Tag	Field Name	Data Type	Max Length	Required	Conditional	Description	Values
2670	TrdRegPublicationReason	int		O	Provided if NoTrdRegPublications (2668) = 1.	Additional reason for trade publication type specified in TrdRegPublicationType (2669). Reasons may be specific to regulatory trade publication rules.	0 = NLIQ 1 = OILQ 4 = ILQD 9 = LIS
381	GrossTradeAmt	num	14 digits + decimal point	R		The Settlement value is calculated in accordance with the standard for a given type of the instrument.	Floating point number. 10 digits for integer part, decimal point, 4 digits for decimal part.
C	StandardTrailer			R			