

Micro services with API gateway

Creating Micro services for account and loan

LoanController.java:

```
package com.cognizant.loan.Controller;

import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;
import com.cognizant.loan.model.Loan;
@RestController
public class LoanController {
    @GetMapping("/loans/{number}")
    public Loan getLoan(@PathVariable String number) {
        return new Loan(number, "Car", 400000, 3258, 18);
    }
}
```

Loan.java

```
package com.cognizant.loan.model;

public class Loan {
    private String number;
    private String type;
    private double loan;
    private double emi;
    private int tenure;
    public Loan() {
    }
    public Loan(String number, String type, double loan, double emi, int tenure) {
        this.number = number;
        this.type = type;
        this.loan = loan;
        this.emi = emi;
        this.tenure = tenure;
    }
    public String getNumber() {
        return number;
    }
    public void setNumber(String number) {
        this.number = number;
    }
    public String getType() {
        return type;
    }
    public void setType(String type) {
```

```

        this.type = type;
    }
    public double getLoan() {
        return loan;
    }
    public void setLoan(double loan) {
        this.loan = loan;
    }
    public double getEmi() {
        return emi;
    }
    public void setEmi(double emi) {
        this.emi = emi;
    }
    public int getTenure() {
        return tenure;
    }
    public void setTenure(int tenure) {
        this.tenure = tenure;
    }
}

```

AccountController.java

```

package com.cognizant.account.controller;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;
import com.cognizant.account.model.Account;
@RestController
public class AccountController {
    @GetMapping("/accounts/{number}")
    public Account getAccount(@PathVariable String number) {
        return new Account(number, "Savings", 234343);
    }
}

```


Account:

```
package com.cognizant.account.model;

public class Account {
    private String number;
    private String type;
    private double balance;
    public Account() {
    }
    public Account(String number, String type, double balance) {
        this.number = number;
        this.type = type;
        this.balance = balance;
    }
    public String getNumber() {
        return number;
    }
    public void setNumber(String number) {
        this.number = number;
    }
    public String getType() {
        return type;
    }
    public void setType(String type) {
        this.type = type;
    }
    public double getBalance() {
        return balance;
    }
    public void setBalance(double balance) {
        this.balance = balance;
    }
}
```


Output:

Server 8080

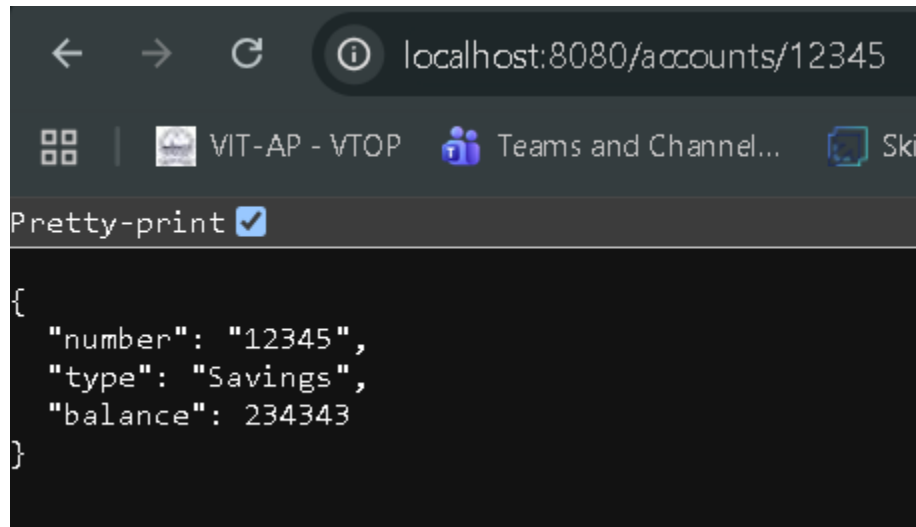

```
{
  "number": "12345",
  "type": "Savings",
  "balance": 234343
}
```

Server 8081

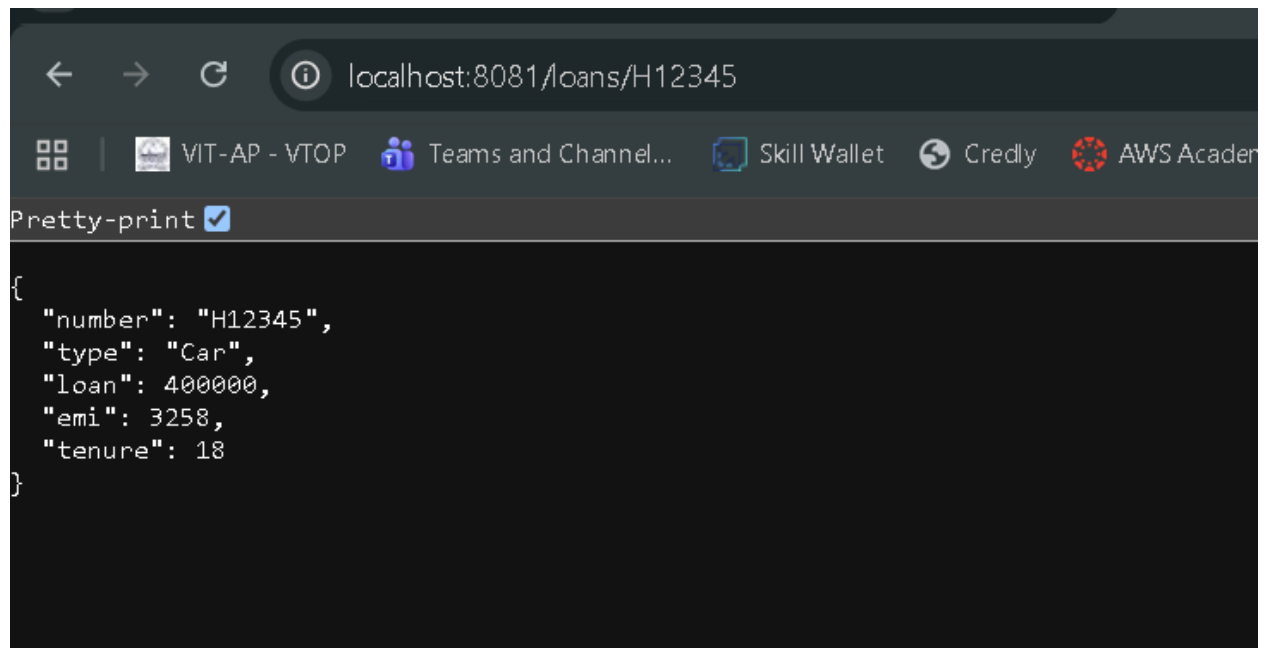

```
{
  "number": "H12345",
  "type": "Car",
  "loan": 400000,
  "emi": 3258,
  "tenure": 18
}
```

Project Trees:

