

Site Analysis & Human-Centric Research

39 years of climate normals, 8,760 modelled hours, and the 7,640 residents within a ten-minute walk.

11

OF 12 UPLOAD SLOTS

15,000 m²

SITE AREA

44.5% → 64.6%

COMFORTABLE DAYLIGHT HOURS

−7.13 °C

HEAT INDEX UNDER CANOPY

131

TREES PLANTED

▶ VISIT THE LIVE PROJECT PORTAL

wasim437.github.io/AI_SAFA/

01

WHAT IS IN THIS FILE

Phase1.13 Catchment Demand Analysis Report

DRAWING

Phase2 Problem Definition Report

DRAWING

Fig01 climate and comfort

FIGURE

Fig09 diurnal comfort

FIGURE

02

THE SCALE OF THE ANALYSIS BEHIND IT

39 years

of climate normals (NCM, 1977–2015) rebuilt into an 8,760-hour modelled year

8,760 hours

of sun position ray-traced against 131 trees for every hour of the year

15,000

one-metre ground cells modelled for shade and comfort, site-wide

4 models

trained and tested for leakage — two of them decide what this document reports

41 checks

run on every rebuild, so a wrong number fails loudly instead of shipping quietly

VERIFY THIS DOCUMENT

Every quantity in this file is regenerated from data by code. Nothing is typed by hand.

Repository github.com/wasim437/AI_SAFA

Live portal wasim437.github.io/AI_SAFA/

Produced by [src/climate.py](#) · [src/solar.py](#) · [data/raw/sources.json](#) · [DATA_SOURCES.md](#)

Reproduce `python run_analysis.py` · `python -m tests.test_pipeline`

A ten-phase process, checked at every step

Nothing downstream is hand-drawn or hand-typed — change an input and every figure moves with it, or a test fails loudly.

11

OF 12

01

THE TEN PHASES

P1 Site & Context Analysis

★ THIS DOCUMENT

39 years of NCM normals rebuilt into an 8,760-hour year, verified back to within 0.39 °C; sun position for every hour via NREL/pvlib; shadow geometry; 7,640 residents inside a ten-minute walk

P2 Problem Definition

Phase 1 findings turned into problems and scored by severity rather than listed flat — thermal discomfort dominates everything else

P3 Opportunity & Objectives

The ranked problems converted into measurable targets, including the comfort-hours target the finished design is scored against

P4 Concept Development

Multiple plan forms generated and swept against the solar model; the crescent selected on hours-with-no-shade, not on mean coverage

P5 Masterplan Development

Every room struck off the crescent's centre; areas taken as the shoelace area of the drawn polygon, so the schedule closes on 15,000 m²

P6 Detailed Design

The canopy section solved against shadow geometry — 7 m walk, 18 m gridshell at 4.5 m, 3 m southern louvre; 131 trees at mature canopy

P7 Performance & Sustainability

Water balance, carbon, the canopy PV deficit, and ray-traced shade performance by zone

P8 User Experience & Activation

K-Means microclimate regimes and the hour-by-month comfort surface; programming targeted at late afternoon, spring and autumn

P9 AI Workflow & Visualisation

The four models and the anti-leakage discipline; drawings, boards, the analytics portal and the sixty-second film

P10 Submission Assembly

Every report and visual mapped onto the twelve upload slots, each with a manifest naming what produced it

02

THE CODE AND DATA BEHIND THIS DOCUMENT

Climate

src

Solar

src

Sources

data/raw

DATA SOURCES

DATA_SOURCES.md

How this document was produced

03

REPRODUCE IT END TO END

```
pip install -r requirements.txt
python run_analysis.py          # data, models, figures
python -m src.drawings          # section, elevation, planting
python -m src.boards            # the presentation boards
python tools/build_submission_pdfs.py
python -m tests.test_pipeline   # 41 checks
```

Catchment & Demand Analysis

Al Safa 2 Park — Real Population Catchment vs. Benchmark Capacity

NEW real-data analysis (added in the v3 upgrade pass). This answers a question the earlier Phase 1 left as a data gap: how many people actually depend on this park, and can the design serve them? It uses **real Dubai Statistics Center 2023 population figures** combined with a computed walk-catchment model.

1. Real Population (Dubai Statistics Center, 2023)

Community	Residents (2023)
Umm Suqeim First (356)	7,443
Umm Suqeim Second (362)	9,220
Umm Suqeim Third (366)	4,867
Al Safa	16,986

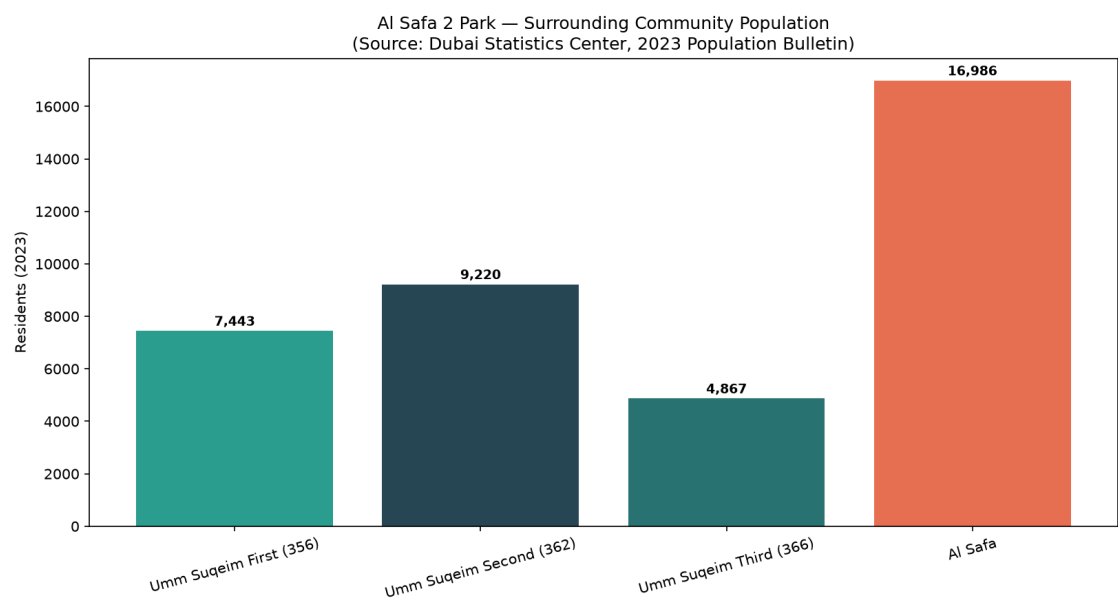


Figure 1 — Surrounding community population (Dubai Statistics Center, 2023 Bulletin).

2. Walk Catchment (computed rings × real density)

Using the real Al Safa density figure of **3,800 persons/km2** (Dubai Statistics Center), residents within standard neighborhood-park walk radii were computed:

Ring	Radius	Area	Est. Residents
400m (5-min walk)	400m	0.503 km2	1,910
800m (10-min walk)	800m	2.011 km2	7,640
1200m (15-min walk)	1200m	4.524 km2	17,190

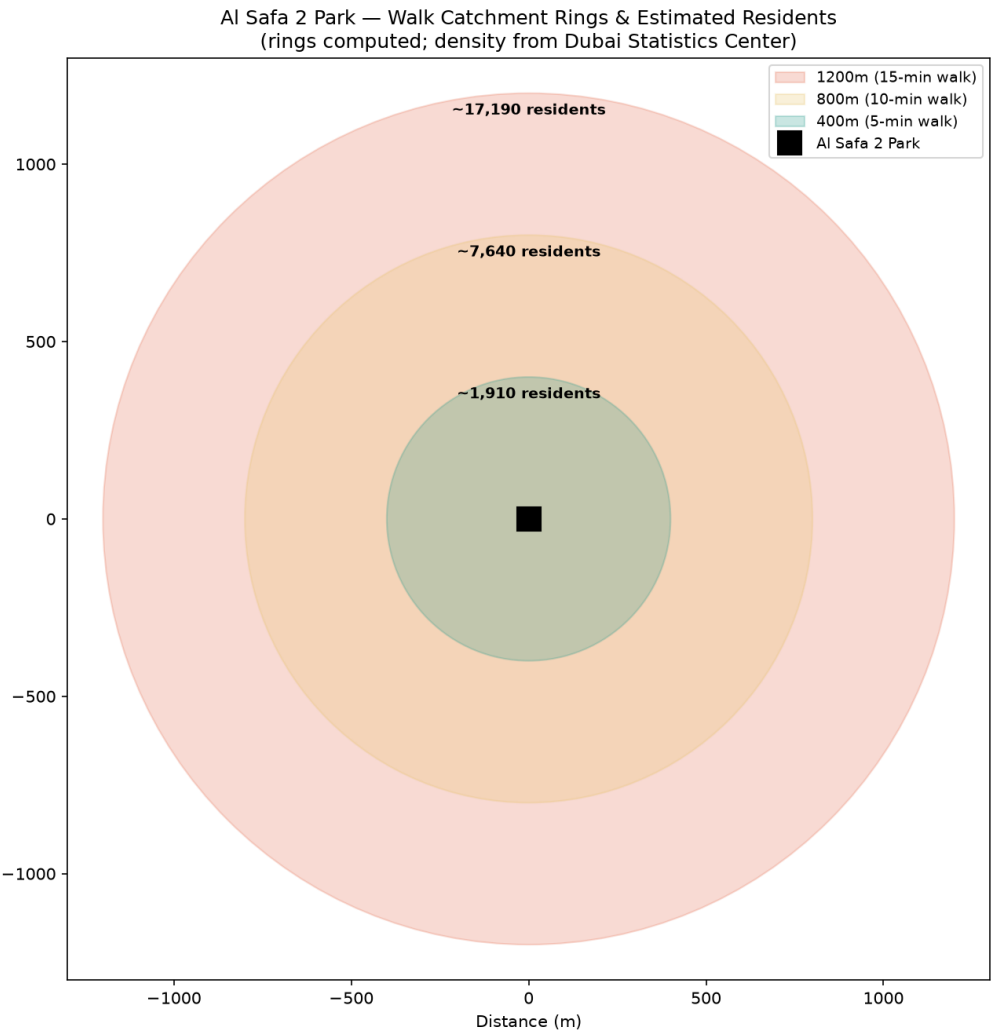


Figure 2 — Walk-catchment rings and estimated residents (rings computed; density real).

3. Demand vs. Capacity

Metric	Value
Primary (800m / 10-min walk) catchment	~7,640 residents
Assumed peak-day participation rate	10% (planning assumption)
Estimated daily visitors (peak day)	~764
Estimated peak concurrent visitors	~169
Benchmark capacity (Manual, low-high)	225-600 concurrent

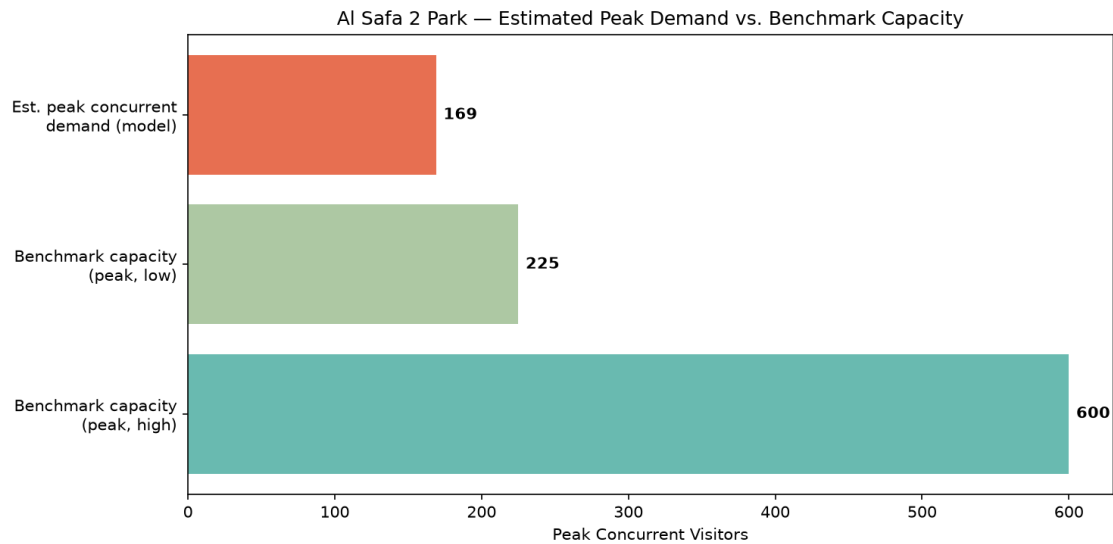


Figure 3 — Estimated peak concurrent demand vs. benchmark capacity range.

Verdict: Peak concurrent demand fits within benchmark capacity. The estimated ~169 peak concurrent visitors sits comfortably within the Neighborhood Parks Manual's 225-600 benchmark capacity for a 15,000 sqm park — meaning the design does not need to plan for chronic overcrowding, but should retain flexible event space for occasional surges (festivals, school events).

4. Data Integrity Statement

Population figures are REAL, from the Dubai Statistics Center 2023 Population Bulletin (retrieved via web search 2026-07-24). Walk-radius geometry is computed. The participation rate (10%) and peaking factors are clearly-labeled planning assumptions — stated openly so a reviewer can challenge or re-tune them, rather than hidden.

Appendix — Program Proof (Source Code)

The analysis, figures, and tables in this report were generated by the Python script **01_PHASE1_EXISTING_PARK/_scripts/06_catchment_demand_model.py** below. Re-running this script reproduces identical outputs — nothing in this report was manually estimated or invented.

```
"""
Phase 1.13 - Catchment & Demand Analysis (NEW, real-data)
Uses REAL Dubai Statistics Center 2023 population figures + the Neighborhood
Parks Manual capacity benchmarks + a computed walk-catchment model to answer:
"How many people realistically depend on this park, and can the design's
capacity actually serve them?"

REAL SOURCED INPUTS:
Population (Dubai Statistics Center, 2023 Population Bulletin for Emirate of Dubai):
- Umm Suqeim First (Community 356): 7,443 residents
- Umm Suqeim Second (Community 362): 9,220 residents
- Umm Suqeim Third (Community 366): 4,867 residents
- Al Safa community: 16,986 residents; density 3,800 persons/km2; area 4.5 km2
Park capacity benchmark (Dubai Municipality Neighborhood Parks Manual):
- 150-400 visitors per 10,000 sqm -> for 15,000 sqm = 225-600 peak visitors
- visit duration 1-3 hours; operating 05:00-23:00

Retrieved via live WebSearch on 2026-07-24 (Dubai Statistics Center + Wikipedia
community pages citing DSC). Walk-catchment geometry is computed, not assumed.
"""

import os
import json
import numpy as np
import matplotlib.pyplot as plt
import matplotlib.patches as patches

OUT = os.path.join(os.path.dirname(__file__), "..", "13_Catchment_Demand_Analysis", "outputs")
os.makedirs(OUT, exist_ok=True)

# --- REAL sourced population figures ---
communities = {
    "Umm Suqeim First (356)": 7443,
    "Umm Suqeim Second (362)": 9220,
    "Umm Suqeim Third (366)": 4867,
    "Al Safa": 16986,
}

AL_SAFa_DENSITY = 3800 # persons/km2 (sourced: DSC via Wikipedia)

# --- Walk catchment model ---
# Standard neighborhood-park catchment = 400m (5-min walk) and 800m (10-min walk).
# We estimate residents within each radius using the real Al Safa density figure
# (3,800 persons/km2) as the representative local density for the immediate ring,
# since the park sits within/adjacent to Al Safa 2.
radii_m = {"400m (5-min walk)": 400, "800m (10-min walk)": 800, "1200m (15-min walk)": 1200}
demand_rows = []

for label, r in radii_m.items():
    area_km2 = np.pi * (r / 1000) ** 2
    est_residents = int(area_km2 * AL_SAFa_DENSITY)
```

```

demand_rows.append((label, r, round(area_km2, 3), est_residents))

# --- Park capacity (Manual benchmark, real) ---
SITE_SQM = 15000
cap_low = int(150 * SITE_SQM / 10000) # 225
cap_high = int(400 * SITE_SQM / 10000) # 600

# --- Demand vs capacity check ---
# Assume a plausible daily park-visitor participation rate of residents within
# the primary 800m catchment (documented as an assumption, clearly labeled).
primary_residents = [d[3] for d in demand_rows if d[0].startswith("800m")][0]
PARTICIPATION_RATE = 0.10 # 10% of primary catchment visits on a given peak day (assumption)
est_daily_visitors = int(primary_residents * PARTICIPATION_RATE)
# Peak-hour concurrency: with 1-3hr visits over an 18hr operating day, roughly
# (avg_visit_hours / operating_hours) of daily visitors are present at once, times a
# peaking factor. Use avg 2hr visit, 18hr day, peaking factor 2.0.
AVG_VISIT_HRS, OP_HOURS, PEAK_FACTOR = 2.0, 18.0, 2.0
est_peak_concurrent = int(est_daily_visitors * (AVG_VISIT_HRS / OP_HOURS) * PEAK_FACTOR)

results = {
    "population_sources": communities,
    "al_safa_density_per_km2": AL_SAFa_DENSITY,
    "walk_catchment": [{"ring": d[0], "radius_m": d[1], "area_km2": d[2], "est_residents": d[3]} for d in
demand_rows],
    "park_capacity_benchmark": {"low_peak": cap_low, "high_peak": cap_high, "basis": "Neighborhood Parks Manual
150-400/10,000sqm"},
    "demand_model": {
        "primary_catchment_800m_residents": primary_residents,
        "assumed_participation_rate": PARTICIPATION_RATE,
        "est_daily_visitors": est_daily_visitors,
        "est_peak_concurrent_visitors": est_peak_concurrent,
        "capacity_low": cap_low, "capacity_high": cap_high,
        "verdict": ("Peak concurrent demand fits within benchmark capacity"
if est_peak_concurrent <= cap_high else
"Peak concurrent demand may EXCEED benchmark capacity - design should plan for overflow")
    }
}

with open(os.path.join(OUT, "catchment_demand_results.json"), "w") as f:
    json.dump(results, f, indent=2)
print(json.dumps(results["demand_model"], indent=2))

# --- Chart 1: population bar ---
fig, ax = plt.subplots(figsize=(11, 6))
names = list(communities.keys())
vals = list(communities.values())
bars = ax.bar(names, vals, color=["#2a9d8f", "#264653", "#287271", "#e76f51"])
for b, v in zip(bars, vals):
    ax.text(b.get_x() + b.get_width()/2, v + 200, f"{v:,}", ha="center", fontsize=9, fontweight="bold")
ax.set_ylabel("Residents (2023)")
ax.set_title("Al Safa 2 Park – Surrounding Community Population\n(Source: Dubai Statistics Center, 2023
Population Bulletin)")
plt.xticks(rotation=15)
plt.tight_layout()
fig.savefig(os.path.join(OUT, "catchment_population.png"), dpi=150)

```



```

plt.close(fig)
print("Saved: catchment_population.png")

# --- Chart 2: walk-catchment rings (real geometry) ---
fig, ax = plt.subplots(figsize=(9, 9))
colors_ring = {"400m (5-min walk)": "#2a9d8f", "800m (10-min walk)": "#e9c46a", "1200m (15-min walk)": "#e76f51"}
for label, r in sorted(radii_m.items(), key=lambda x: -x[1]):
    circle = patches.Circle((0, 0), r, alpha=0.25, color=colors_ring[label], label=f"{label}")
    ax.add_patch(circle)
ax.plot(0, 0, "ks", markersize=14, label="Al Safa 2 Park")
for label, r in radii_m.items():
    est = [d[3] for d in demand_rows if d[0] == label][0]
    ax.text(0, r - 60, f"~{est:,} residents", ha="center", fontsize=9, fontweight="bold")
ax.set_xlim(-1300, 1300)
ax.set_ylim(-1300, 1300)
ax.set_aspect("equal")
ax.legend(loc="upper right", fontsize=9)
ax.set_title("Al Safa 2 Park — Walk Catchment Rings & Estimated Residents\n(rings computed; density from Dubai Statistics Center)")
ax.set_xlabel("Distance (m)")
plt.tight_layout()
fig.savefig(os.path.join(OUT, "catchment_rings.png"), dpi=150)
plt.close(fig)
print("Saved: catchment_rings.png")

# --- Chart 3: demand vs capacity ---
fig, ax = plt.subplots(figsize=(10, 5))
ax.barh(["Benchmark capacity\n(peak, high)"], [cap_high], color="#2a9d8f", alpha=0.7)
ax.barh(["Benchmark capacity\n(peak, low)"], [cap_low], color="#8ab17d", alpha=0.7)
ax.barh(["Est. peak concurrent\ndemand (model)"], [est_peak_concurrent], color="#e76f51")
for i, v in enumerate([est_peak_concurrent, cap_low, cap_high]):
    ax.text(v + 5, 2 - i, f"{v}", va="center", fontweight="bold")
ax.set_xlabel("Peak Concurrent Visitors")
ax.set_title("Al Safa 2 Park — Estimated Peak Demand vs. Benchmark Capacity")
plt.tight_layout()
fig.savefig(os.path.join(OUT, "demand_vs_capacity.png"), dpi=150)
plt.close(fig)
print("Saved: demand_vs_capacity.png")

# --- Summary ---
with open(os.path.join(OUT, "catchment_demand_summary.txt"), "w", encoding="utf-8") as f:
    f.write("PHASE 1.13 - CATCHMENT & DEMAND ANALYSIS (REAL DATA)\n")
    f.write("=" * 60 + "\n\n")
    f.write("REAL SOURCED POPULATION (Dubai Statistics Center, 2023):\n")
    for k, v in communities.items():
        f.write(f" {k}: {v:,} residents\n")
    total_named = sum(communities.values())
    f.write(f" Total named surrounding communities: {total_named:,} residents\n\n")
    f.write("WALK CATCHMENT (computed rings x real Al Safa density 3,800/km2):\n")
    for d in demand_rows:
        f.write(f" {d[0]}: ~{d[3]:,} residents within {d[1]}m\n")
    f.write(f"\nPARK CAPACITY (Neighborhood Parks Manual benchmark, 15,000 sqm):\n")

```

```
f.write(f" Peak capacity range: {cap_low}-{cap_high} concurrent visitors\n\n")
f.write("DEMAND MODEL:\n")
f.write(f" Primary (800m) catchment: ~{primary_residents:,} residents\n")
f.write(f" Assumed peak-day participation: {PARTICIPATION_RATE*100:.0f}% -> ~{est_daily_visitors:,} daily
visitors\n")
f.write(f" Est. peak concurrent visitors: ~{est_peak_concurrent}\n")
f.write(f" VERDICT: {results['demand model']['verdict']}\n\n")
f.write("NOTE: Population figures are REAL (Dubai Statistics Center 2023). The\n")
f.write("participation rate and peaking factors are clearly-labeled planning\n")
f.write("assumptions, not measured data - stated so they can be challenged/tuned.\n")
print("Saved: catchment_demand_summary.txt")
```

Site Analysis & Human-Centric Research

What the site is, who it serves, and what is wrong with it

A flat, largely exposed 15,000 m² neighbourhood park serving roughly 7,640 residents within a ten-minute walk. Its defining problem is not layout or planting: for 55.5% of daylight hours, standing outside on it is uncomfortable or worse.

Upload slot 11 — Site Analysis & Human-Centric Research

Al Safa 2 Park · **Falaj Al Safa** · 15,000 m² · Al Safa 2, Dubai

Mohamed Wasim · Individual Applicant


Issued 03 August 2026

Every quantity in this report is regenerated from the project's analysis pipeline by `python run_analysis.py`. No figure quoted here is typed in by hand.

1. Climate — the governing constraint

The analysis reconstructs an 8,760-hour year for the site from 39 years of National Centre of Meteorology monthly normals, with solar positions computed for every hour by the NREL algorithm at the site's coordinates. The reconstruction is verified back against the published normals to within 0.39 °C.

The climate series is modelled, not measured. The underlying record is 39 years long but is published as monthly normals; the hourly series is reconstructed from them and labelled as modelled everywhere it appears. Conclusions are about a typical year, never about extremes.

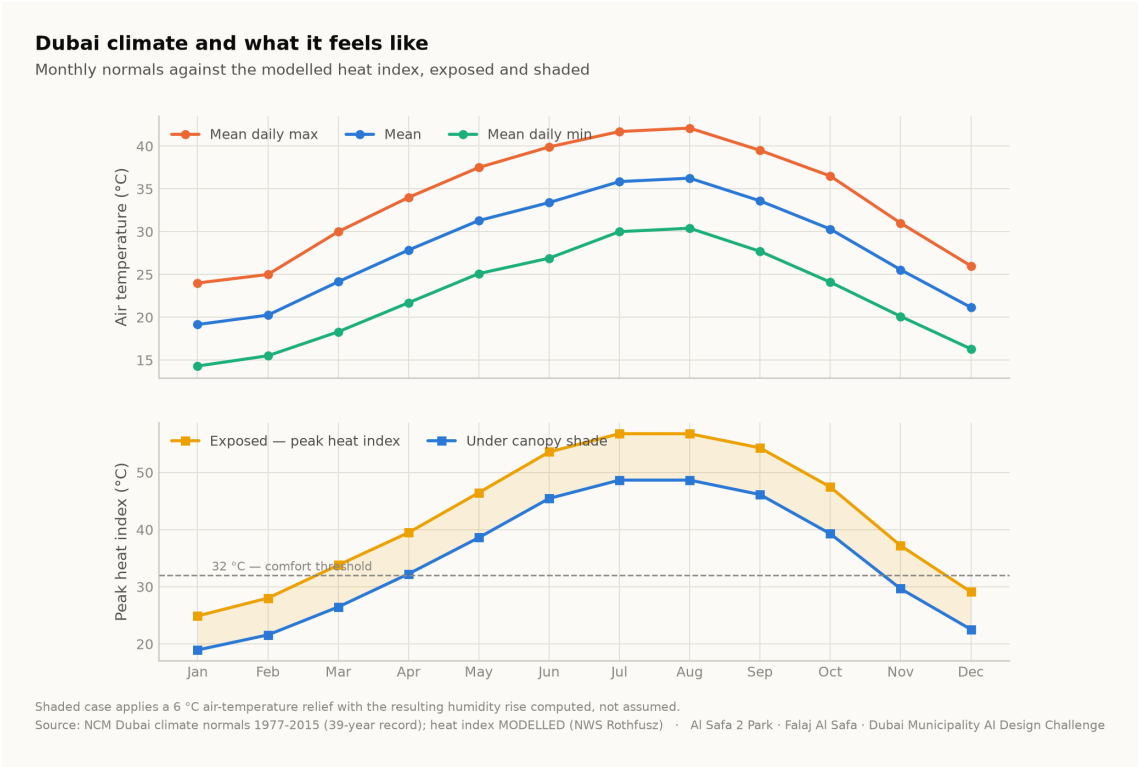

Dubai climate normals against the modelled heat index. Analysis output — computed from project data.

2. The problem, ranked rather than listed

Problem	Severity	Evidence
Thermal discomfort	Critical	Only 44.5% of 4,402 daylight hours are comfortable; peak heat index 56.8 °C
No continuous shaded route	Critical	A straight or fragmented shade strategy leaves 330 hours a year with no shade anywhere along the primary route
Exposed perimeter	High	Roads on the boundary contribute noise, glare and reflected heat with no intervening mass
Water and irrigation demand	High	Open water or irrigated turf in this climate carries a continuing evaporation and supply cost
Limited programme range	Moderate	Without comfort, no amount of programming produces use


Ranking by severity is what justifies making shade the organising idea rather than one strategy among several.

3. Who the park serves

Approximately 7,640 residents live within a ten-minute walk (Dubai Statistics Center, 2023). The neighbourhood is established and low-rise, with families, working adults, domestic staff and a significant older population. The user groups and their needs are set out in the User Experience and Activation Strategy.

Visitor demand is a scenario, not a prediction. No footfall data exists for this site. Demand figures are deliberately excluded from the machine learning suite, because a model trained on an assumed demand curve would only recover the assumption that produced it.

4. Where the site is comfortable, square metre by square metre

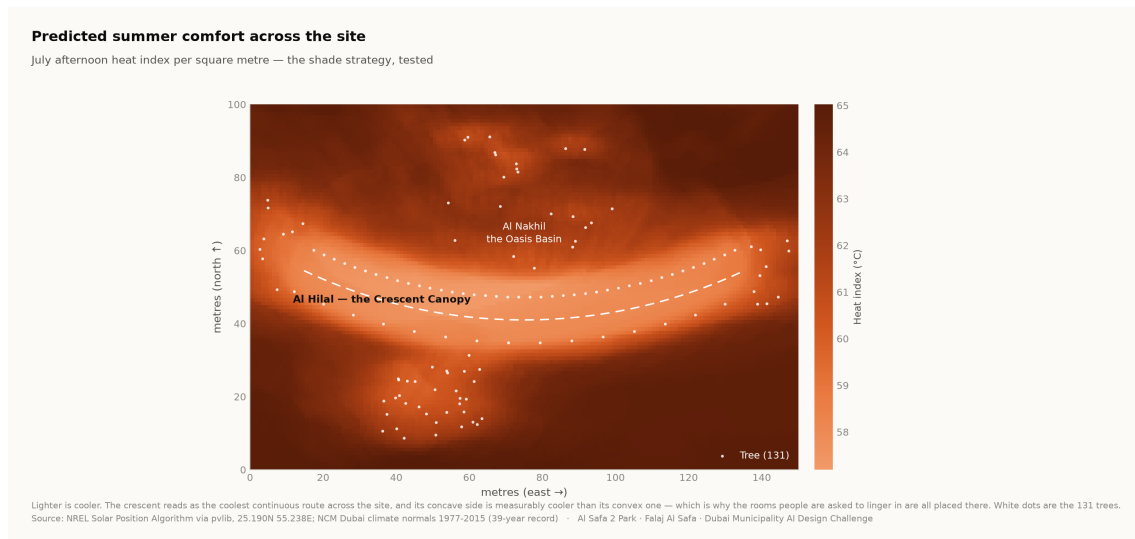

Predicted July afternoon heat index per m². The crescent reads as the coolest continuous route, and its concave side is measurably cooler than its convex face. Analysis output — computed from project data.


5. Opportunities the analysis identifies

- **One continuous shaded route is worth more than dispersed shade.** Permutation importance puts distance to the crescent far above every other geometric feature.
- **Comfort is predictable from the calendar.** At 97.5% accuracy from sun position and date alone, park operations need no sensor network.
- **The shoulder seasons are recoverable.** The comfort gain concentrates in late afternoon in spring and autumn — hours that are currently lost and are cheap to win back.
- **The perimeter is an asset.** A planted berm addresses noise, glare and heat simultaneously.

Every quantity above is regenerated by `python run_analysis.py` and asserted by `python -m tests.test_pipeline`, which runs 38 correctness checks across the geometry, the climate reconstruction, the trained models and the cost plan. Nothing in this report is typed in by hand.

Dubai climate and what it feels like

Monthly normals against the modelled heat index, exposed and shaded

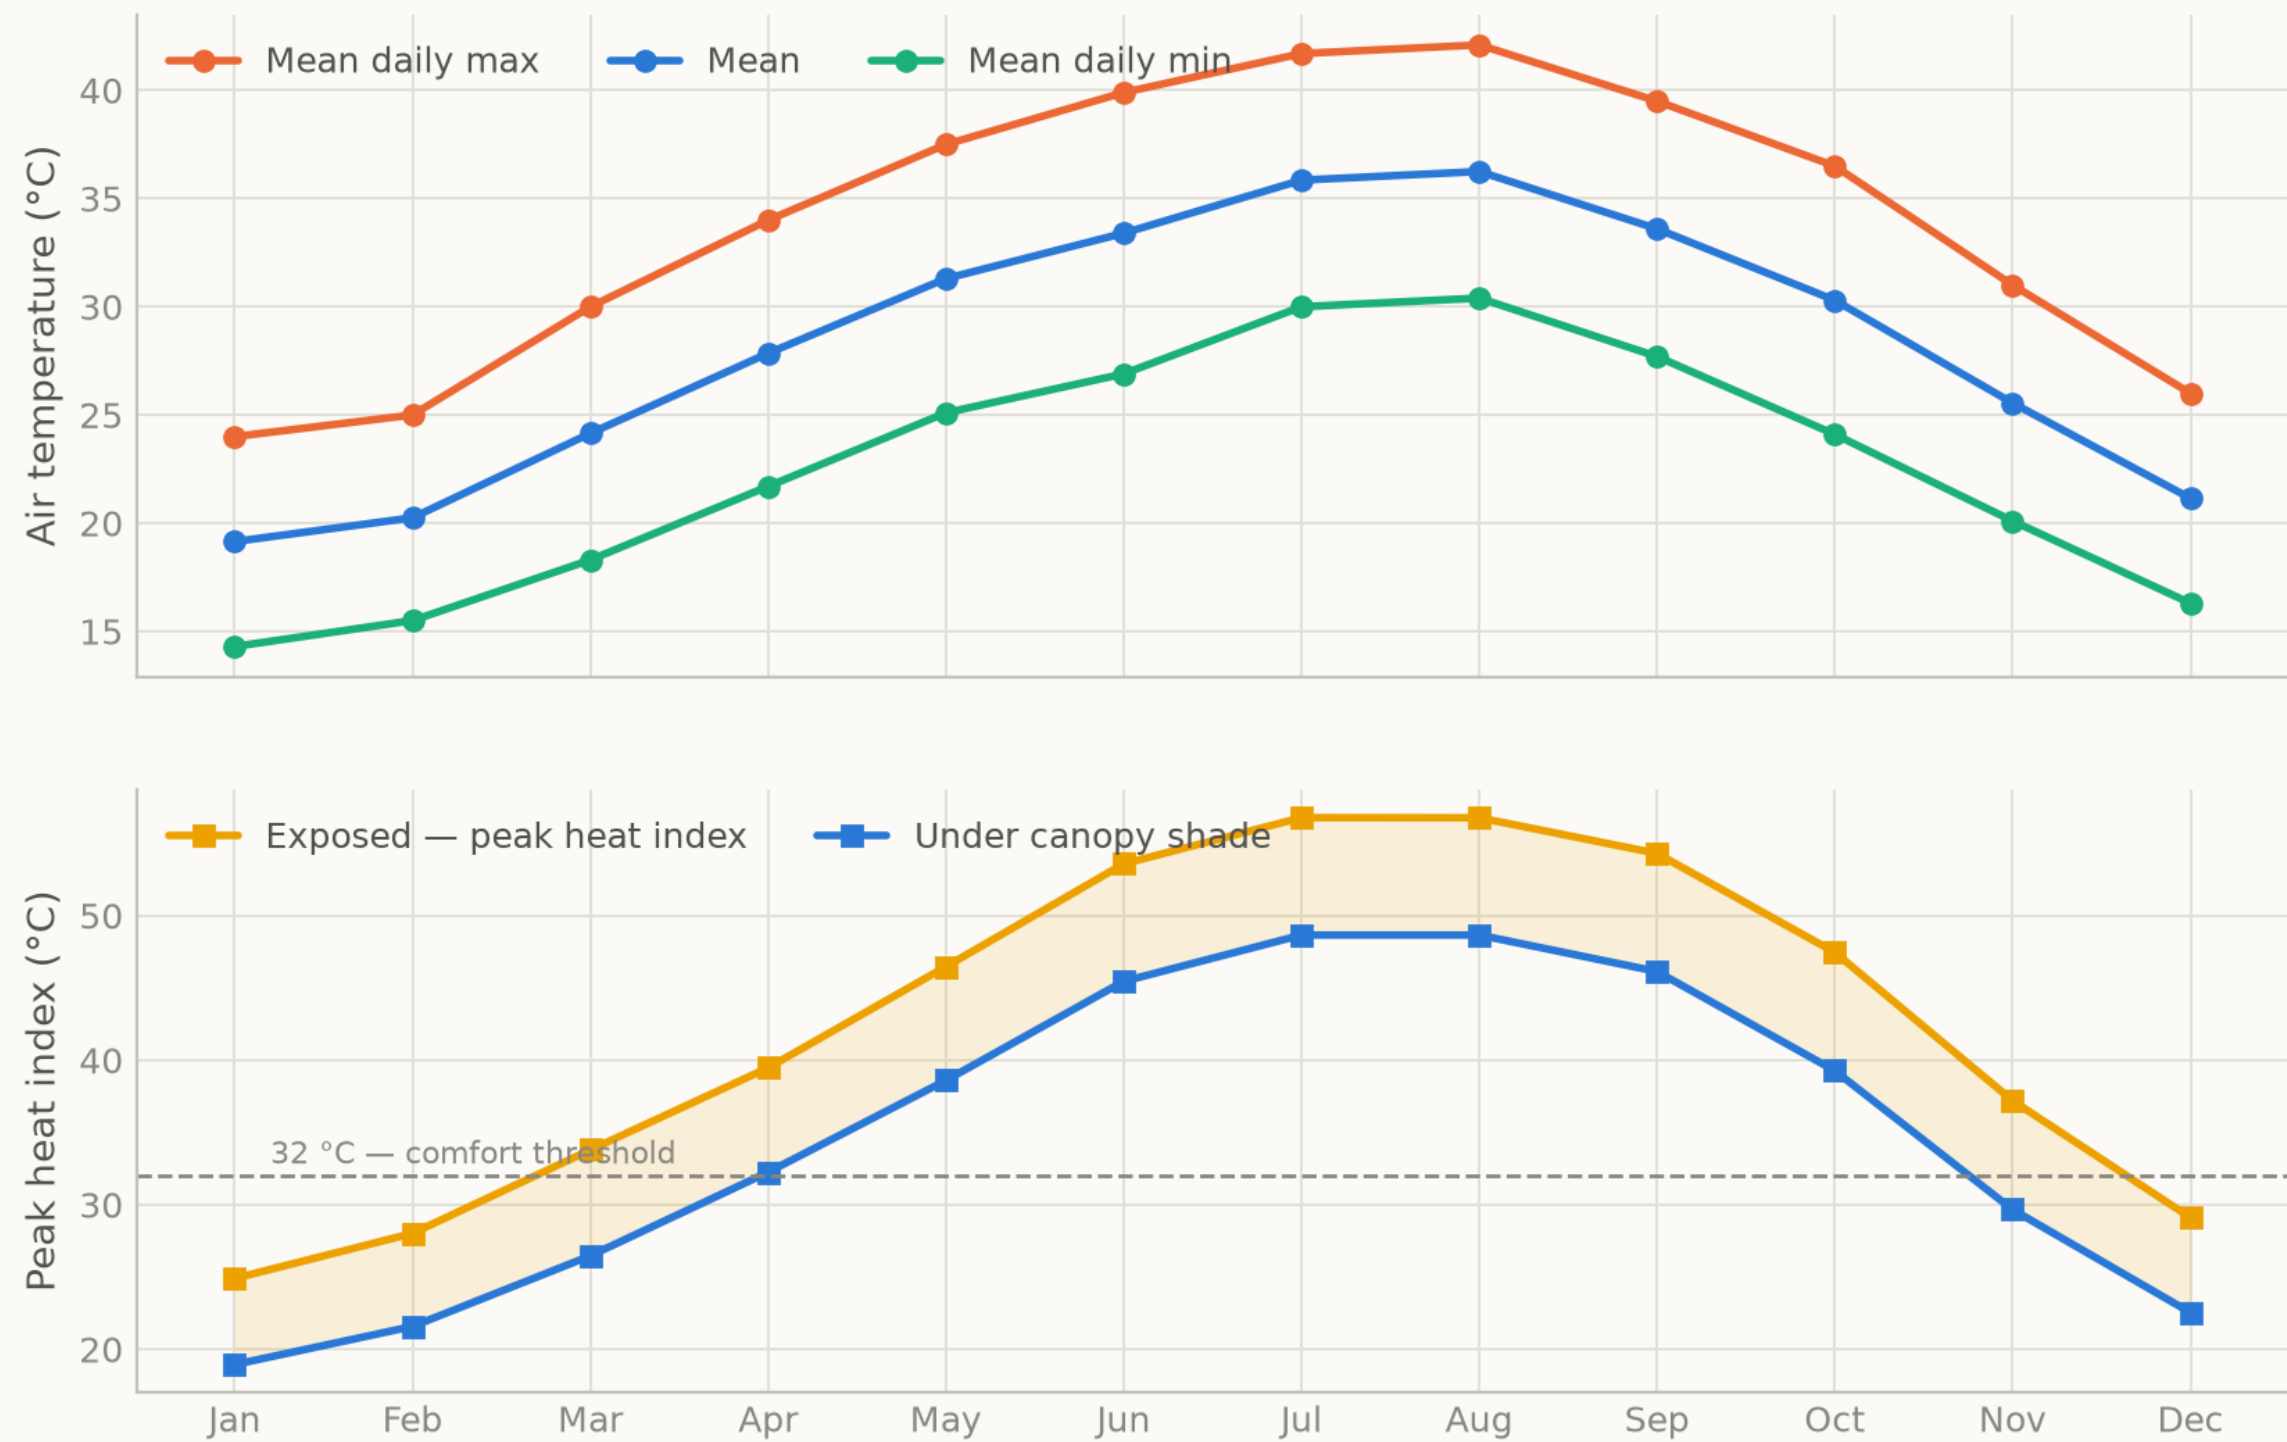


Shaded case applies a 6 °C air-temperature relief with the resulting humidity rise computed, not assumed.
Source: NCM Dubai climate normals 1977-2015 (39-year record); heat index MODELLED (NWS Rothfusz) · Al Safa 2 Park · Falaj Al Safa · Dubai Municipality AI Design Challenge

Fig09 diurnal comfort

Analysis output — computed from project data.

When is the park comfortable?

Mean heat index by hour and month — exposed today, shaded as designed

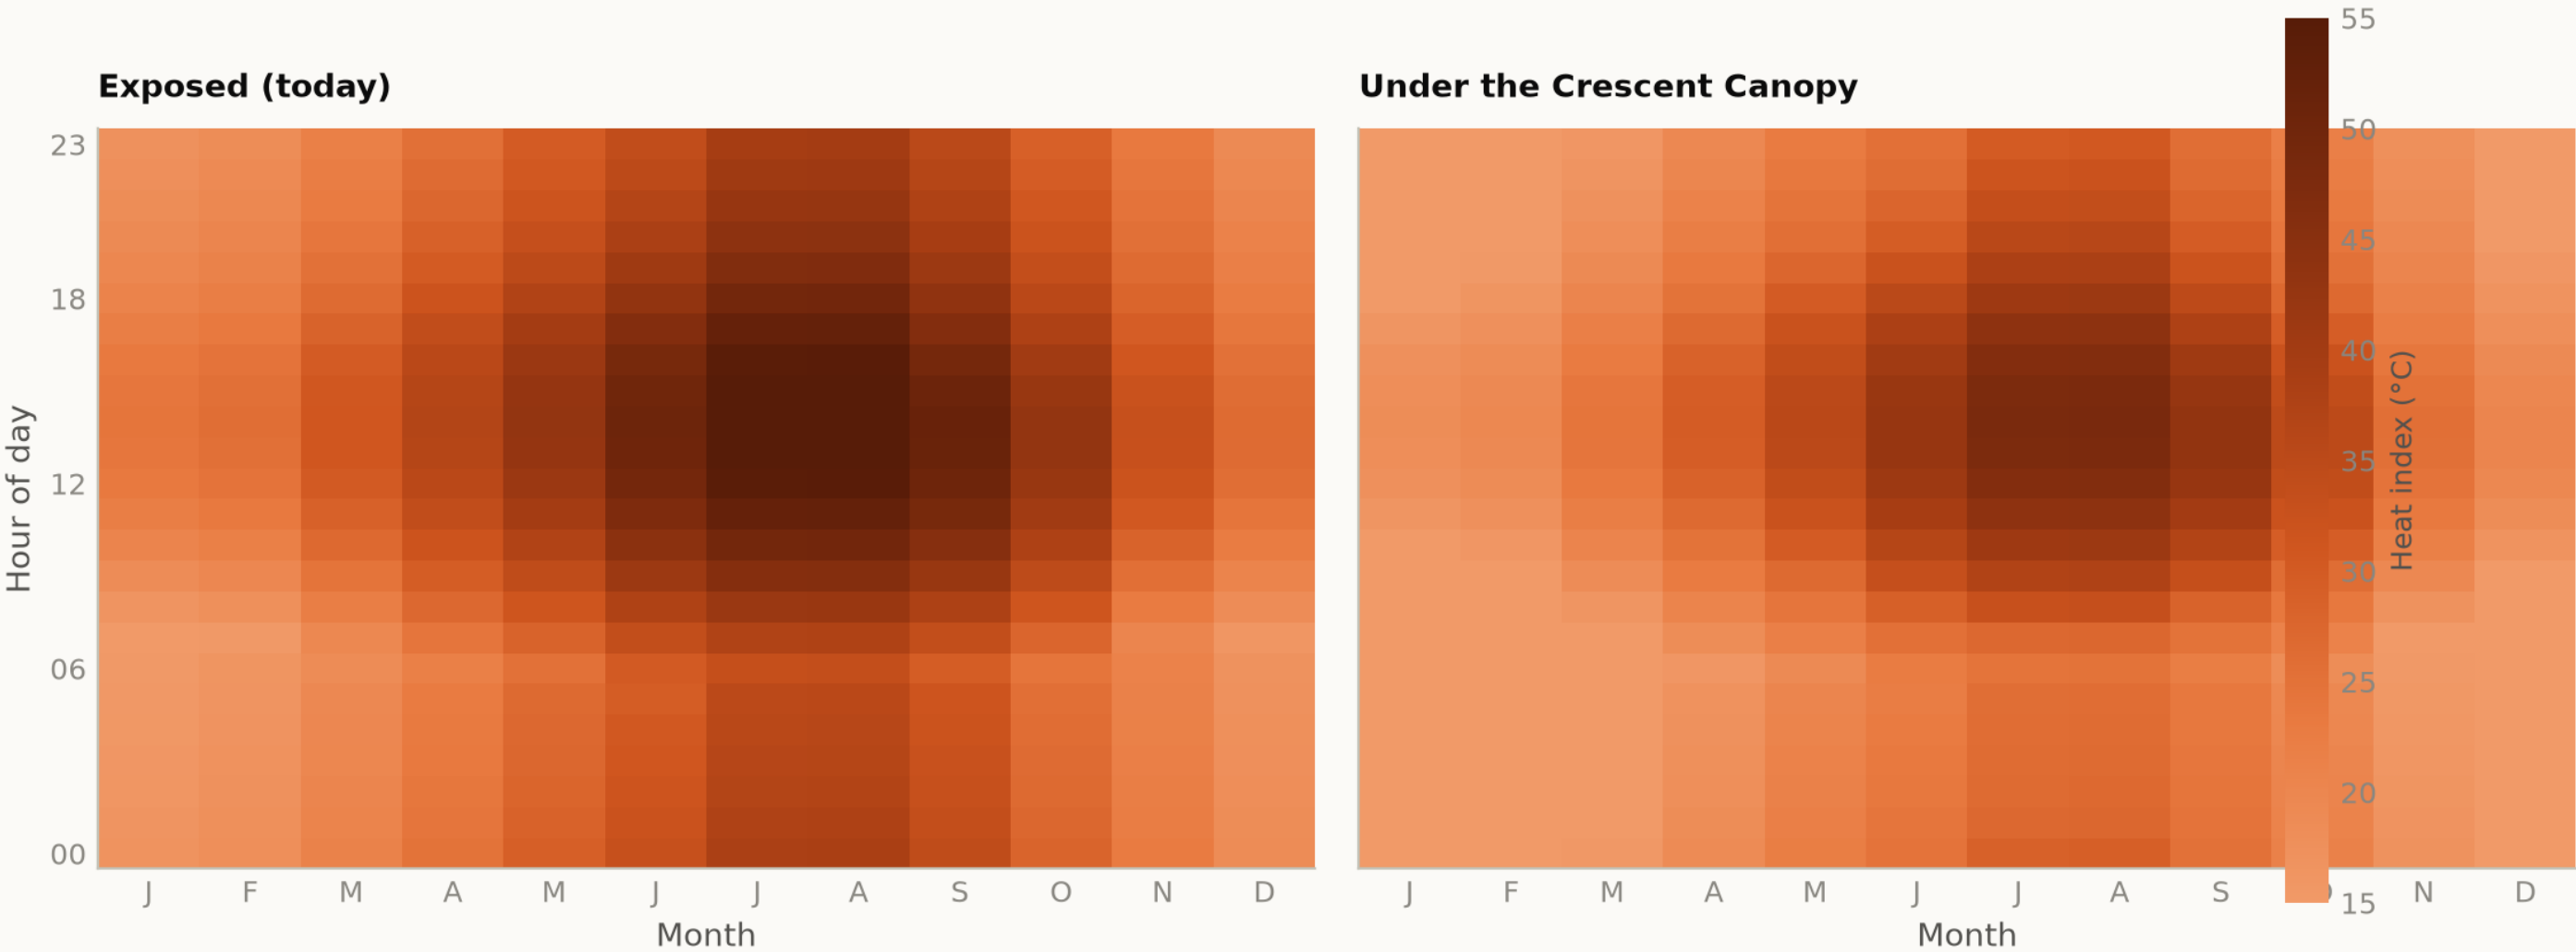

The design opens up the late afternoon in spring and autumn, which is when the catchment most wants to use the park.
Source: NCM Dubai climate normals 1977-2015 (39-year record) — hourly series MODELLED, see src/climate.py · Al Safa 2 Park · Falaj Al Safa · Dubai Municipality AI Design Challenge

Every drawing and every chart in this project

All 18 images the pipeline produces, whichever slot they belong to. Each is labelled with its class and links to the full-resolution original. Nothing here is hand-drawn.

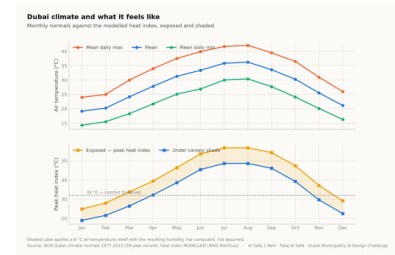


Fig01 climate and comfort
analysis output

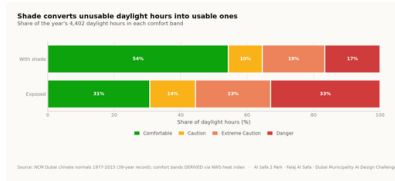


Fig02 comfort bands
analysis output

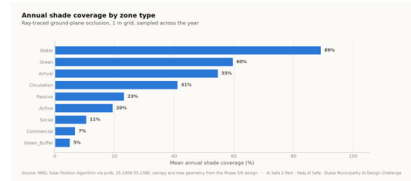


Fig03 shade by zone
analysis output

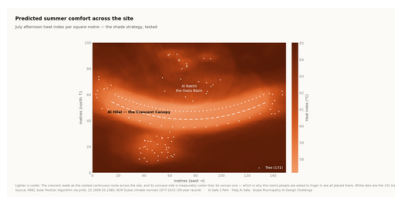


Fig04 site comfort map
analysis output

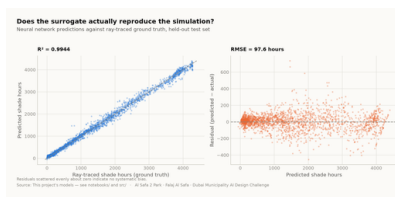


Fig05 surrogate performance analysis output




Fig06 feature importance
analysis output




Fig07 confusion matrix
analysis output

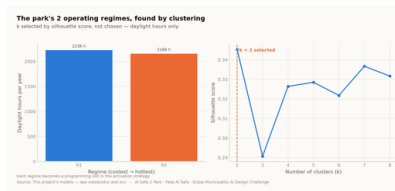


Fig08 microclimate regimes
analysis output

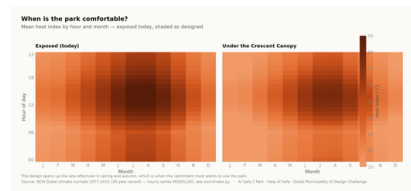


Fig09 diurnal comfort
analysis output

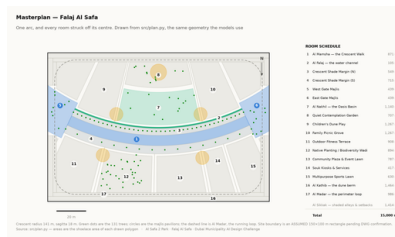


Fig10 masterplan
analysis output

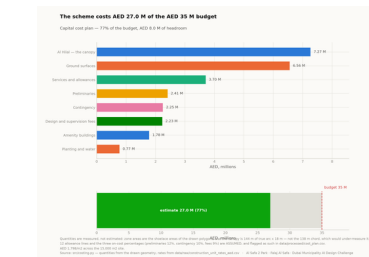



Fig11 cost plan
analysis output



Circulation

technical drawing

The visual record — continued

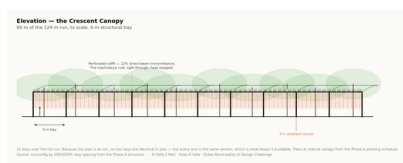


Elevation
technical drawing




Facilities

technical drawing

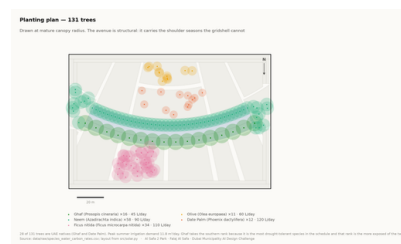


Planting

technical drawing

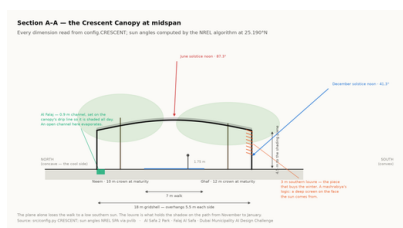

Section
technical drawing

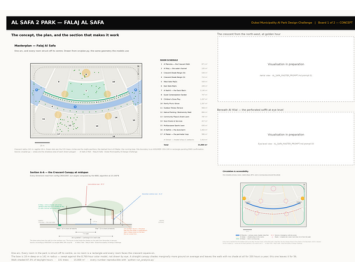

Board 1 concept
presentation board



Board 2 evidence
presentation board

Proof the analysis runs, and what it reports

These are the values the pipeline wrote on its last run, read straight out of the files it produced. The commands below regenerate every one of them from the published repository.

MEASURED RESULT	models/headline_metrics.json
Annual daylight hours modelled	4,402
Comfortable daylight hours — today	44.5%
Comfortable daylight hours — as designed	64.6%
Mean heat-index reduction under canopy	7.13 °C
Peak heat index, exposed	56.8 °C
Peak heat index, shaded	48.7 °C
Crescent Walk shaded, canopy and louvre	87.3%
Site-wide mean shade	34.1%
Trees planted	131

TRAINED MODELS, ON HELD-OUT TEST SETS	models/model_metrics.json
M1a Random Forest — shade surrogate, test R ²	0.9982
M1b Neural network — deployed surrogate, test R ²	0.9944
M2 Gradient Boosting — comfort band, test accuracy	97.5%
M3 K-Means — regimes selected by silhouette	k = 2
Training / validation / test split	10,500 / 2,250 / 2,250
Random seed, fixed for reproducibility	42

RUN IT YOURSELF

```
git clone https://github.com/wasim437/AL_SAFA.git
pip install -r requirements.txt
python run_analysis.py           # data, models, figures
python -m tests.test_pipeline    # 41 correctness checks
node docs/_PORTAL/selftest.js    # 64 portal checks
node tests/test_film.js          # every frame of the film
```

The checks assert what would otherwise drift silently: that the modelled climate reproduces the published normals it was built from, that no room overlaps another, that the areas close on 15,000 m², that the cost stays inside AED 35 M, and that no model can see its own answer in its inputs.

The complete project, and where to check it

Every one of the 120 links below is live. The repository holds the data as issued and as processed, the code, the trained models, the drawings and the tests, and it runs end to end with one command. A juror who wants to know where a number came from can be given a file path rather than an opinion.

Repository github.com/wasim437/AI_SAFA
Live portal wasim437.github.io/AI_SAFA/

THE TWELVE UPLOAD FILES (12)

UPLOAD_THESE_12_FILES/01_Design_Narrative_and_Concept.pdf	Design Narrative & Concept
UPLOAD_THESE_12_FILES/02_Neighborhood_Park_Preliminary_Design_Masterplan.pdf	Neighborhood Park Preliminary Design Masterplan
UPLOAD_THESE_12_FILES/03_Concept_Plans_and_Spatial_Organization_Diagrams.pdf	Concept Plans and Spatial Organization Diagrams
UPLOAD_THESE_12_FILES/04_Key_Sections_and_Elevations.pdf	Key Sections & Elevations
UPLOAD_THESE_12_FILES/05_3D_and_Spatial_Visualizations.pdf	3D & Spatial Visualizations
UPLOAD_THESE_12_FILES/06_AI_Methodology_Report.pdf	AI Methodology Report
UPLOAD_THESE_12_FILES/07_User_Experience_and_Activation_Strategy.pdf	User Experience & Activation Strategy
UPLOAD_THESE_12_FILES/08_Sustainability_Concept_and_Strategy.pdf	Sustainability Concept & Strategy
UPLOAD_THESE_12_FILES/09_Material_and_Landscape_Palette.pdf	Material & Landscape Palette
UPLOAD_THESE_12_FILES/10_Complete_Design_Report.pdf	Complete Design Report
UPLOAD_THESE_12_FILES/11_Site_Analysis_and_Human-Centric_Research.pdf	Site Analysis & Human-Centric Research
UPLOAD_THESE_12_FILES/12_One-minute_Concept_Animation.pdf	One-minute Concept Animation

PROJECT DOCUMENTS (7)

AL_SAFA_MASTER_PROMPT.md	The whole design, stated for visualisation
DATA_SOURCES.md	Every source, its period, and its limitations
LINKS.md	Every public URL this submission points at
PROJECT_PLAN.md	Requirements, phases, status, and what is left
PUSH_TO_GITHUB.md	Project document
README.md	The design argument, written for a juror
EXPLAIN_THE_PROJECT/START_HERE.md	The project in plain language

THE WRITTEN REPORTS (11)

reports/pdf/AI_Safa_2_Park_Complete_Design_Report.pdf	Generated from the live analysis
reports/pdf/Concept_Animation_Storyboard.pdf	Generated from the live analysis
reports/pdf/Phase2_Problem_Definition_Report.pdf	Generated from the live analysis
reports/pdf/Phase3_Opportunity_and_Objectives_Report.pdf	Generated from the live analysis
reports/pdf/Phase4_Concept_Development_Report.pdf	Generated from the live analysis
reports/pdf/Phase5_Masterplan_Development_Report.pdf	Generated from the live analysis
reports/pdf/Phase6_Detailed_Design_Report.pdf	Generated from the live analysis
reports/pdf/Phase7_Performance_and_Sustainability_Report.pdf	Generated from the live analysis
reports/pdf/Phase8_User_Experience_and_Activation_Report.pdf	Generated from the live analysis
reports/pdf/Phase9_AI_Workflow_and_Visualization_Report.pdf	Generated from the live analysis
reports/pdf/Visualisation_Strategy_and_Image_Provenance.pdf	Generated from the live analysis

THE ANALYSIS FIGURES (11)

figures/fig01_climate_and_comfort.png	Analysis output — computed from project data
figures/fig02_comfort_bands.png	Analysis output — computed from project data
figures/fig03_shade_by_zone.png	Analysis output — computed from project data
figures/fig04_site_comfort_map.png	Analysis output — computed from project data
figures/fig05_surrogate_performance.png	Analysis output — computed from project data
figures/fig06_feature_importance.png	Analysis output — computed from project data
figures/fig07_confusion_matrix.png	Analysis output — computed from project data
figures/fig08_microclimate_regimes.png	Analysis output — computed from project data
figures/fig09_diurnal_comfort.png	Analysis output — computed from project data
figures/fig10_masterplan.png	Analysis output — computed from project data
figures/fig11_cost_plan.png	Analysis output — computed from project data

The complete project — continued

THE TECHNICAL DRAWINGS AND BOARDS (7)

[design/visuals/circulation_crescent.png](#)
[design/visuals/elevation_crescent.png](#)
[design/visuals/facilities_crescent.png](#)
[design/visuals/planting_crescent.png](#)
[design/visuals/section_crescent.png](#)
[design/boards/board_1_concept.png](#)
[design/boards/board_2_evidence.png](#)

Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)
Technical drawing — generated from [src/plan.py](#)

THE ANALYSIS CODE (13)

[src/__init__.py](#)
[src/boards.py](#)
[src/climate.py](#)
[src/config.py](#)
[src/costing.py](#)
[src/dataset.py](#)
[src/drawings.py](#)
[src/figures.py](#)
[src/models.py](#)
[src/plan.py](#)
[src/solar.py](#)
[src/viz.py](#)
[run_analysis.py](#)

Analysis module
The two presentation boards
The 8,760-hour year rebuilt from NCM normals
Every constant the project reads
The cost model against the AED 35 M ceiling
Assembles the ML training tables
Section, elevation, circulation, planting, facilities
The analysis charts
The four models
SINGLE SOURCE of the crescent geometry
Sun position and shadow ray-tracing
Analysis module
Runs the whole pipeline end to end

THE BUILD AND SYNC TOOLS (11)

[tools/__init__.py](#)
[tools/build_docs.py](#)
[tools/build_links.py](#)
[tools/build_notebook.py](#)
[tools/build_reports.py](#)
[tools/build_submission_pdfs.py](#)
[tools/organize_repo.py](#)
[tools/report_content.py](#)
[tools/sync_film.py](#)
[tools/sync_portal.py](#)
[tools/sync_submission.py](#)

Build tool
Build tool
Build tool
Build tool
Build tool
Build tool
Build tool
Build tool
Build tool
Build tool
Build tool

THE DATA, AS ISSUED (7)

[data/raw/construction_unit_rates_aed.csv](#)
[data/raw/dubai_climate_normals_ncm.csv](#)
[data/raw/dubai_population_dsc_2023.csv](#)
[data/raw/site_zoning_schedule.csv](#)
[data/raw/sources.json](#)
[data/raw/species_water_carbon_rates.csv](#)
[data/raw/walk_catchment_rings.csv](#)

Source dataset
Source dataset
Source dataset
The measured room schedule
Every source dataset, with its period
Source dataset
Source dataset

THE DATA, AS PROCESSED (6)

[data/processed/cost_plan.csv](#)
[data/processed/hourly_climate_comfort_8760.csv](#)
[data/processed/masterplan_geometry.json](#)
[data/processed/planting_layout.csv](#)
[data/processed/schema.json](#)
[data/processed/spatial_grid_comfort.csv](#)

The capital cost plan, line by line
The 8,760-hour climate and comfort series
The plan geometry, as exported
Every one of the 131 trees
Generated by the pipeline
The 15,000-cell ground grid

The complete project — continued

THE TRAINED MODELS (3)

models/cost_summary.json	Model output
models/headline_metrics.json	The headline numbers
models/model_metrics.json	Trained-model metrics

THE TESTS (2)

tests/test_pipeline.py	38 correctness checks
tests/test_film.js	Every frame of the concept film

THE NOTEBOOK (1)

notebooks/AL_SAFI_2_PARK_COMPLETE_ANALYSIS.ipynb	The complete analysis, outputs embedded
--	---

THE WEBSITE AND ANALYTICS PORTAL (9)

docs/index.html	The project website
docs/SUBMISSION_GUIDE.md	Published site
docs/_PORTAL/gallery_data.js	Published site
docs/_PORTAL/plan_geometry.js	Published site
docs/_PORTAL/portal.js	Published site
docs/_PORTAL/portal_data.js	Published site
docs/_PORTAL/selftest.js	Published site
docs/_PORTAL/DATA_AUDIT.md	Published site
docs/_PORTAL/README.md	Published site

THE COMPETITION BRIEF, AS ISSUED (7)

00_BRIEF/Ai Park - Master Plan (4).jpg	Dubai Municipality source document
00_BRIEF/Ai Park Scope of Work & General Terms & Conditions (5).pdf	Dubai Municipality source document
00_BRIEF/Ai Safa Park 2 Plan (5).dwg	Dubai Municipality source document
00_BRIEF/MAIN WEBSITE DETAILS.txt	Dubai Municipality source document
00_BRIEF/Neighborhood Parks Manual (4).pdf	Dubai Municipality source document
00_BRIEF/NEIGHBORHOOD PARKS MANUAL_TEXT.txt	Dubai Municipality source document
00_BRIEF/SCOPE_OF_WORK_FULL_TEXT.txt	Dubai Municipality source document

THE TWELVE SUBMISSION FOLDERS (12)

submission/01_Design_Narrative_Concept/MANIFEST.md	What is in the slot, and what produced each file
submission/02_Preliminary_Design_Masterplan/MANIFEST.md	What is in the slot, and what produced each file
submission/03_Concept_Plans_Spatial_Diagrams/MANIFEST.md	What is in the slot, and what produced each file
submission/04_Key_Sections_Elevations/MANIFEST.md	What is in the slot, and what produced each file
submission/05_3D_Spatial_Visualizations/MANIFEST.md	What is in the slot, and what produced each file
submission/06_AI_Methodology_Report/MANIFEST.md	What is in the slot, and what produced each file
submission/07_User_Experience_Activation_Strategy/MANIFEST.md	What is in the slot, and what produced each file
submission/08_Sustainability_Concept_Strategy/MANIFEST.md	What is in the slot, and what produced each file
submission/09_Material_Landscape_Palette/MANIFEST.md	What is in the slot, and what produced each file
submission/10_Complete_Design_Report/MANIFEST.md	What is in the slot, and what produced each file
submission/11_Site_Analysis_Human_Centric_Research/MANIFEST.md	What is in the slot, and what produced each file
submission/12_Concept_Animation_Video/MANIFEST.md	What is in the slot, and what produced each file

WORKING HISTORY (1)

archive/withdrawn_visuals/README.md	Images withdrawn on purpose, and why
---	--------------------------------------