


- What can go wrong with using the following?  

```
double squareRoot(double n) {
    ... // compute x
    return x;
}
```
- So, why do your classes interact correctly?
  - Magic!
  - Your client code agrees to..
  - Your classes check all arguments and operations for correctness

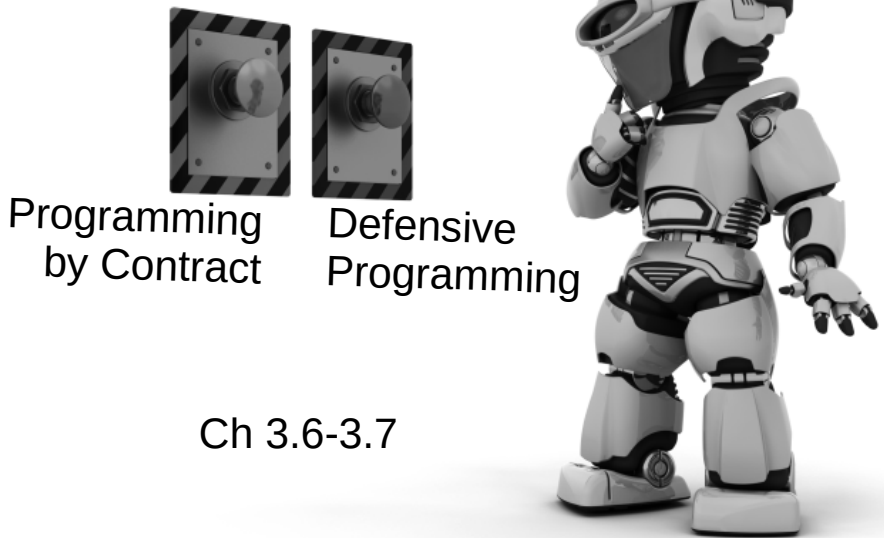

Ch 3.6-3.7

## Programming by Contract

- Programming by Contract:  
Each method and class has a contract.
  - Client code..
  - Class..
- ..
- What the client ensures before calling the method.
- ..
- What the class ensures when method finishes.

```
/**
 * Returns the real number x,
 * such that x * x = n
 * Precondition:
 * Input n is 0 or greater.
 */
double squareRoot(double n) {
    // compute x
    ..
    return x;
}
```

## Example

- The method assumes the client enforces the contract
  - ..
  - Client code's responsibility to ensure contract preconditions are not violated

```
/**
 * Removes top element from the stack
 * @pre stack is not empty
 * @post stack is not full,
 * @post top element removed,
 * @post size decreased by one
 */
public void pop(){
    elements.remove(0);
}
```

- Client must be..

Example:  
Stack must have an  
isEmpty() method.

## Driving Analogy

- Driving could be a contract:
  - Given the preconditions that everyone else obeys the law, you will be safe.
- Defensive Driving:
  - You are never sure what other drivers will do, so always..
- Example:
  - Shoulder check when making a left turn to make sure nobody is illegally passing you on the left
  - Staying out of a car's blind spot to avoid getting hit if they fail to shoulder check while changing lanes

18-02-04

5

## Defensive Programming

- A class is responsible for..
  - All input values and actions are checked for correctness.
    - ex: prevent adding a duplicate element to a "set"
    - ex: prevent adding an element to a full array.
- Brian's "Defensive Programming"
  - Find bad inputs/actions and..
  - How?..

18-02-04

6

## Assert Basics

- Assert (basics)
  - Usage:  
`assert condition;`
  - If the condition is false,..  
(throws an `AssertionError` exception)
- Example Statement:  
`assert age >= 0;`
- Example Method:  

```
public void pop() {  
    assert !isEmpty();  
    elements.remove(0);  
}
```

18-02-04

7

## Comparison

- Should a square-root method check that the input is non-negative?
  - Design by Contract:..
  - Defensive Programming:..  
client may call us with a bad value we should check.
- Benefit of Design by Contract
  - ..
    - otherwise client & class check for valid values.
  - Duplicate checks make system more complicated.
- Benefit of Defensive Programming
  - ..
  - Should use for all calls accessible by untrusted code.

18-02-04

8

# Error Handling Options

1. do nothing - BAD idea!  
-EX: sqrt() w/o any checking or documentation
2. Document pre-conditions - Programming by contract  
-Works best with language support.  
-EX: sqrt() w/o any checking, but with documentation
3. crash fast (assert) - Check for programmer errors  
-EX: sqrt() w/ assert
4. raise exceptions  
-EX: sqrt() w/ exception
5. return invalid value (null, -1, ...)  
-EX: sqrt() w/ return -1
6. correct problem  
-Given incorrect input, try to correct it as best as possible.  
-EX: sqrt() w/ abs(x) call to make positive.

18-02-04

9

Asserts:  
Sanity tests in your code

18-02-04

10

## Assertions

- Assert statements
  - Trigger a runtime error if a condition is false
  - .. benefit: Convert logic error to runtime error
- Example Usage

```
double rSquared = getCircleArea() / Math.PI;
assert rSquared >= 0;
double r = squareroot(rSquared);
```
- Assertion failure
  - Displays source file & line number via an exception.



```
Exception in thread "main" java.lang.AssertionError
at ca.sfu.cmpt213.AssertDemo.assertRadius(AssertDemo.java:14)
at ca.sfu.cmpt213.AssertDemo.main(AssertDemo.java:9)
```

18-02-04

11

## Enabling Assertions

- Enabling Assertions
  - Turned on/off at runtime by JVM
  - Pass -ea argument to the JVM
  - -ea means..  
enable assertions
- In IntelliJ  
Run --> Edit Configurations  
in VM options: add -ea

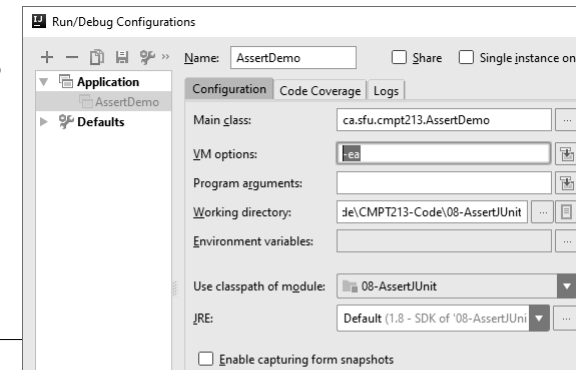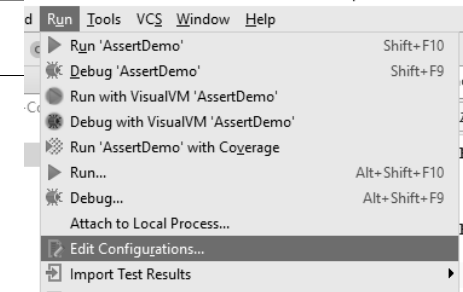

18-02-04

Demo: assertion failing.

## Assert User Guide (1)

- Assertions check for.. invalid conditions which should crash the program.
- Guide to using Asserts
  - Assert the expectations you place.. on programmers
    - Ex: Calling pop() on a non-empty stack.
  - Don't assert things that could reasonably be false.
    - Ex: Don't assert a user's input is > 0 because they may have typed in -1.
    - Must check for and handle these errors.

18-02-04

13

## Assert User Guide (2)

- Don't assert things that.. will already cause runtime errors
- Use assertions to catch.. unanticipated cases

```
String getDescription(Car car) {  
    assert car != null;  
    String str = car.toString();  
    return str;  
}
```

If *car* is null, it will generate an exception on it's own.

```
switch(productType) {  
    case SOFTWARE:  
        // ...  
        break;  
    case HARDWARE:  
        // ...  
        break;  
    default:  
        assert false;  
}
```

18-02-04

14

## Assert User Guide (3)

- .. dont assert the logically impossible

```
int age = getUserAge();  
if (age < 50) {  
    // ...  
} else if (age >= 50) {  
    // ...  
} else {  
    assert false;  
}
```

- .. assert consistency of internal state

18-02-04

15

## Problems with Assert

- Too many asserts can.. slow down your program
  - Ex: in a graphics engine for a game.
  - Solution: disable them at runtime.
- Too many asserts can..complicate your code
  - Solution: only use where they will help.
- Not for handling errors at runtime
  - Ex: Asserts can be disable at runtime; ..

dont rely them as error handling (they can be disabled)

  - Solution:
    - assert for programmer errors or “invalid” conditions.
    - use error handling for “possible” errors (file not found)

18-02-04

16

# Summary

- Programming by Contract
  - Class states the contract
  - Client enforces it meets preconditions.
- Defensive Programming
  - Class ensures it's always in a valid state.
  - It validates all actions and values.
- Use asserts to validate assumptions
  - Check for programmer errors, not “possible” errors.
  - Asserts must be enabled in JVM (-ea)