

Evaluation of Code Review Comment

Given code change, and the reference code review comment, please rate the code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

Here is a code change and the corresponding reference code review comment in the real-world repository.



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

1.

Confirmed, no need to set this value; just set it to:

```
`conf.setLong(DFS_NAMENODE_STALE_DATANODE_INTERVAL_KEY, 5000);` *
```

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

2.


Use

```
`NumberFormat.getInteger(DFS_NAMENODE_STALE_DATANODE_INTERVAL_KEY, 5000)` or
```

```
`NumberFormat.getLong(DFS_NAMENODE_STALE_DATANODE_INTERVAL_KEY, 5000)` *
```

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

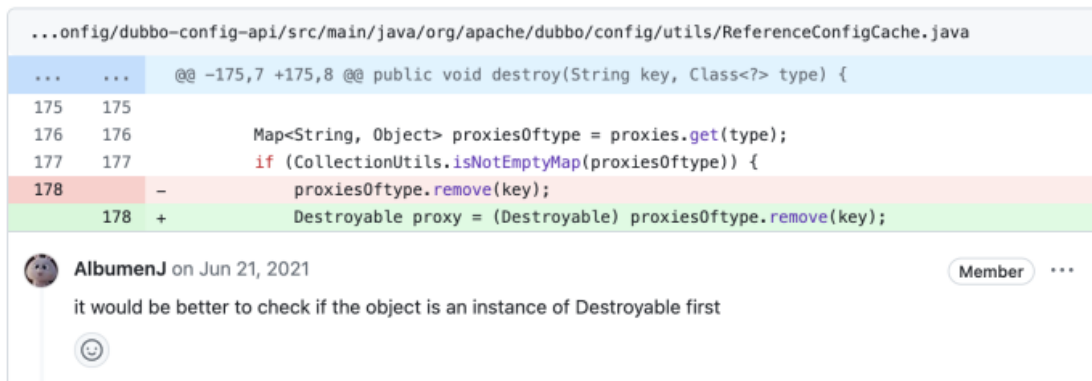

Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

3.

This change will have to be done in `remove` method, which in `ReferenceConfigCache`, it is better to just do `proxy.destroy()` on the object itself. *

Unclear ☐1 ☐2 ☐3 ☐4 ☐5 Clear

4.

I'm not sure this is the right fix. If you want to destroy a map that is empty, you should first remove the key, and then call `proxy.destroy()`. If you want to destroy a map that is empty, you should call `proxy.destroy()` before calling `proxy.destroy()`. *

Unclear ☐1 ☐2 ☐3 ☐4 ☐5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

5. remove author tag, thx *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

6. please remove the useless import. *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

...p-common-project/hadoop-common/src/main/java/org/apache/hadoop/fs/viewfs/ViewFileSystem.java

Outdated

1940 +

1941 +

1942 +

1943 +

try {

res = fsState.resolve(path.toString(), true);

} catch (FileNotFoundException ex) {

throw new NotInMountpointException(path, String.format("getEnclosingRoot - %s", ex.get

 steveloughran on Oct 20, 2023

Contributor

...

add the caught exception as the cause



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

7.

ok, add an `initCause(ex)` building this exception and the one in `viewFS`. stack traces are too useful to throw away*

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

8.

`String.format("getEnclosingRoot - %s", ex.getMessage()) *`

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

src/main/java/rx/internal/operators/OperatorAny.java

67 +

68 +

69 +

70 +

```
if (!done) {
    done = true;
    child.onError(e);
}
```

 akarnokd on Jul 27, 2016

Member ...

Call `RxJavaHooks.onError` so no exception is lost.



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

9. Call `RxJavaHooks.onError` to avoid exception. *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

10. Please don't change the indent. Use nacos code style to reformat code. *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

```
...essing/src/main/java/org/apache/druid/query/aggregation/last/StringLastVectorAggregato
r.java
...    @@ -124,6 +124,9 @@ public void aggregate(
124    124        int positionOffset
125    125    )
126    126    {
127    +    if (timeSelector == null) {
```

 **somu-imply** on Jul 25, 2023 Contributor ...

We should add this piece in NumericLastVectorAggregator too



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

11. timeSelector can't be null *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

12.

I think this should be `[USER]` rather than `[USER]`. It's a bit weird that a
`StringLastVectorAggregator` can accept a `BaseLongVectorValueSelector` but a
`VectorAggregator` can accept a `BaseLongVectorValueSelector`. *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

```
client/rest/src/main/java/org/elasticsearch/client/RestClient.java Outdated
...    ...    @@ -568,9 +576,12 @@ private static HttpRequestBase createHttpRequest(String method, URI uri,
568    576        }
569    577    }
570    578
571    -    private static HttpRequestBase addRequestBody(HttpRequestBase httpRequest, HttpEntity entity) {
579    +    private HttpRequestBase addRequestBody(HttpRequestBase httpRequest, HttpEntity entity) {
```

 **andreidan** on Oct 6, 2020 Contributor ...

This can remain static and receive the `compressionEnabled` flag as parameter



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

13.

I believe this can remain static *


Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

14.

I don't think we need to make this method public. Let's make it package-private. *

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

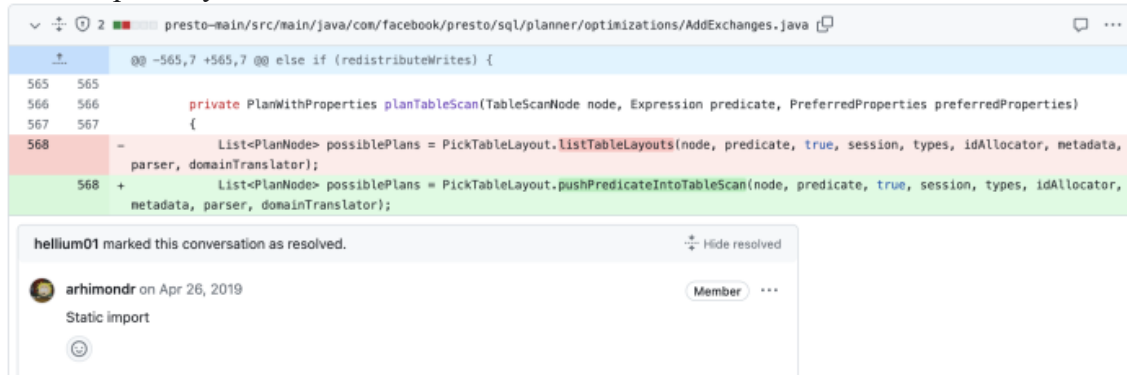

```
presto-main/src/main/java/com/facebook/presto/sql/planner/optimizations/AddExchanges.java
@@ -565,7 +565,7 @@ else if (redistributeWrites) {
565 565
566 566     private PlanWithProperties planTableScan(TableScanNode node, Expression predicate, PreferredProperties preferredProperties)
567 567     {
568 -        List<PlanNode> possiblePlans = PickTableLayout.listTableLayouts(node, predicate, true, session, types, idAllocator, metadata,
568 +        List<PlanNode> possiblePlans = PickTableLayout.pushPredicateIntoTableScan(node, predicate, true, session, types, idAllocator,
        parser, domainTranslator);
        metadata, parser, domainTranslator);
```

hellium01 marked this conversation as resolved.

arhimondr on Apr 26, 2019

Static import

Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

15. static import *

Unclear ☐1 ☐2 ☐3 ☐4 ☐5 Clear

16. remove extra line *

Unclear ☐1 ☐2 ☐3 ☐4 ☐5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

```
src/main/java/rx/Completable.java
...    @@ -1859,6 +1860,7 @@ public final Subscription subscribe(final Action0 onComplete) {
1859 1860         subscribe(new CompletableSubscriber() {
1860 1861             @Override
1861 1862             public void onComplete() {
1863 +                mad.unsubscribe();

```

 **zsxwing** on Feb 15, 2016 Member ...

This one should be called after `onComplete.call()`.



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

17. This one should be called after ``onComplete.call()``.*

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

18. revert*

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

Here is a code change and the corresponding reference code review comment in the real-world repository.

x-pack/plugin/esql/compute/src/main/java/org/elasticsearch/compute/operator/DriverContext.java

48 +

// For testing

49 +

public DriverContext() {

50 +

this(BigArrays.NON_RECYCLING_INSTANCE);

51 +

}

 **nik9000** on Sep 14, 2023

Member ...

I know it's a pain, but I'd prefer not to have this in our production code. It'd be super ok on some test class, but it's too tempting.



Please rate the following code review comment based on the scale of 1-5, where 1 indicates that the comment makes no sense and 5 indicates that the comment can clearly demonstrate the issue in the code change.

19.

I don't think this is necessary. `NonRecyclingInstance` is a singleton and so no one can create a `DriverContext`.*

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear

20.

It's not really a "default"- it's more of a "don't use this in production" kind of thing.*

Unclear ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 Clear