SegmentGDA

ACM MM 2026

Training-Free Few-Shot Segmentation via Gaussian Discriminant Analysis on Vision Foundation Features

Yiqi Wu* Huachao Wu* Ronglei Hu Dejun Zhang†

School of Computer Science, China University of Geosciences, Wuhan, China

CODE PAPER

Method

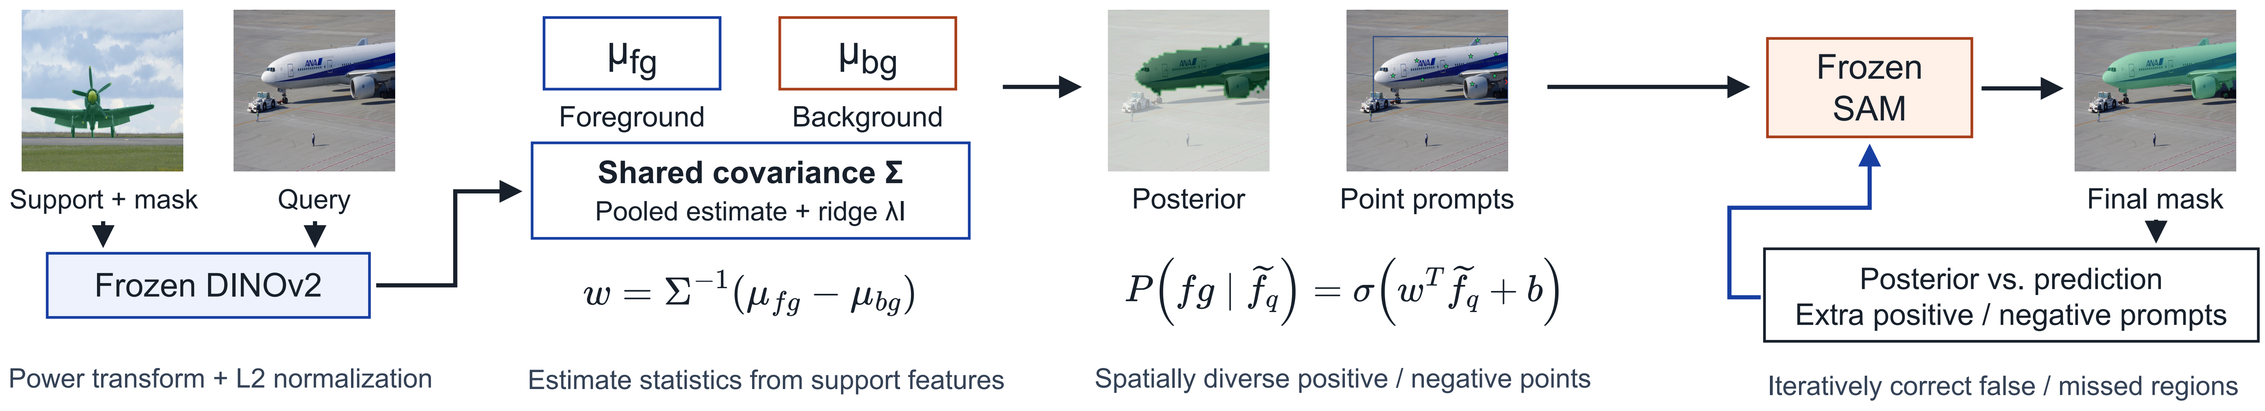

Backbones: DINOv2 ViT-L/14 and SAM ViT-H (both frozen).

Qualitative comparison

Benchmark results

Selected training-free baselines | 5-shot mIoU (%)

Method	COCO-20^i	FSS-1000	LVIS-92^i	PASCAL-5^i
Matcher	60.7	89.6	40.0	74.0
UNICL-SAM	**78.7**	86.3	37.4	-
GF-SAM	66.8	88.9	**44.2**	**82.6**
SegmentGDA	62.5	**89.8**	41.8	82.2

Legend

Method comparison

GT Matcher GF-SAM Ours

Posterior-guided masks

Prompts: green stars (+), red crosses (-).

Masks: prediction (red), ground truth (green).

Column best in bold; -: unreported.

Posterior-guided segmentation | COCO-20^i, 5-shot

* Equal contribution † zhangdejun@cug.edu.cn