

Centro de Procesamiento de Datos

Kopia




**UNIVERSIDAD
DE GRANADA**

Práctica 7. Copias de seguridad

Juan Navarro Maldonado


1.- Almacenamiento Rsync con SSH

- Creamos la carpeta test1 en centos2

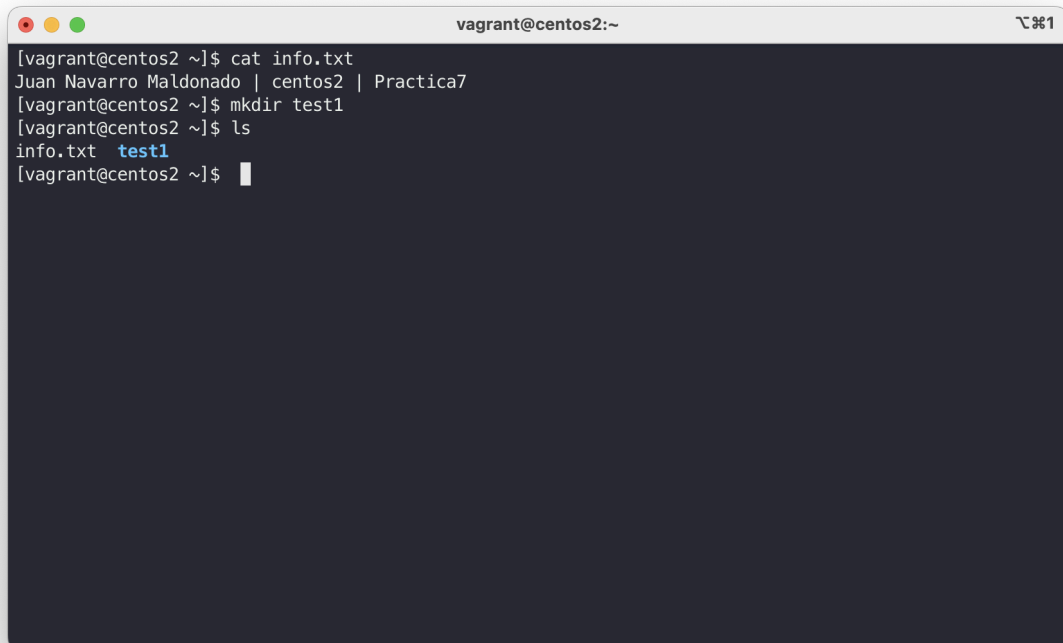

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ mkdir test1  
[vagrant@centos2 ~]$ ls  
info.txt  test1  
[vagrant@centos2 ~]$
```

- Sincronizamos la carpeta con centos1

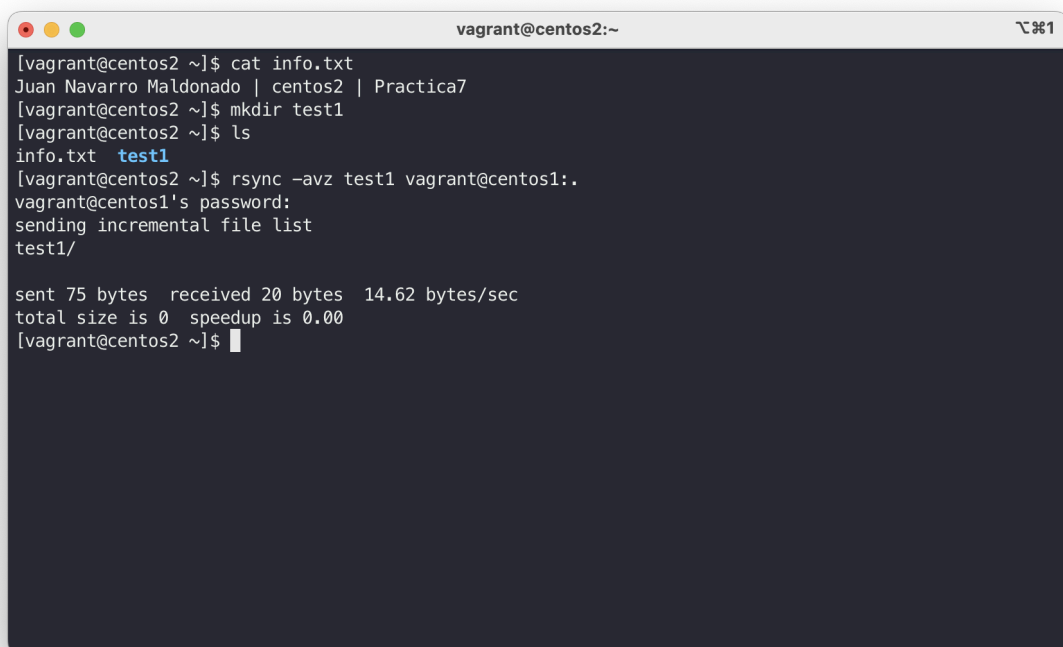

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ mkdir test1  
[vagrant@centos2 ~]$ ls  
info.txt  test1  
[vagrant@centos2 ~]$ rsync -avz test1 vagrant@centos1:.  
vagrant@centos1's password:  
sending incremental file list  
test1/  
  
sent 75 bytes  received 20 bytes  14.62 bytes/sec  
total size is 0  speedup is 0.00  
[vagrant@centos2 ~]$
```

```
vagrant@centos1:~  
[vagrant@centos1 ~]$ cat info.txt  
Juan Navarro Maldonado | centos1 | practica7  
[vagrant@centos1 ~]$ ls  
info.txt  test1  
[vagrant@centos1 ~]$
```

- Añadimos un archivo apartado1.txt

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ mkdir test1  
[vagrant@centos2 ~]$ ls  
info.txt  test1  
[vagrant@centos2 ~]$ rsync -avz test1 vagrant@centos1:.  
vagrant@centos1's password:  
sending incremental file list  
test1/  
  
sent 75 bytes  received 20 bytes  14.62 bytes/sec  
total size is 0  speedup is 0.00  
[vagrant@centos2 ~]$ echo "Apartado1" > test1/apartado1.txt  
[vagrant@centos2 ~]$
```

- Resincronizamos con el servidor

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ mkdir test1  
[vagrant@centos2 ~]$ ls  
info.txt  test1  
[vagrant@centos2 ~]$ rsync -avz test1 vagrant@centos1:.  
vagrant@centos1's password:  
sending incremental file list  
test1/  
  
sent 75 bytes  received 20 bytes  14.62 bytes/sec  
total size is 0  speedup is 0.00  
[vagrant@centos2 ~]$ echo "Apartado1" > test1/apartado1.txt  
[vagrant@centos2 ~]$ rsync -avz test1 vagrant@centos1:.  
vagrant@centos1's password:  
sending incremental file list  
test1/  
test1/apartado1.txt  
  
sent 166 bytes  received 39 bytes  45.56 bytes/sec  
total size is 10  speedup is 0.05  
[vagrant@centos2 ~]$
```

```
vagrant@centos1:~  
[vagrant@centos1 ~]$ cat info.txt  
Juan Navarro Maldonado | centos1 | practica7  
[vagrant@centos1 ~]$ ls  
info.txt  test1  
[vagrant@centos1 ~]$ cat test1/apartado1.txt  
Apartado1  
[vagrant@centos1 ~]$
```

2.- Servidor GIT

- Creacion y configuracion del repositorio local en centos2

```
vagrant@centos2:~/devel/test2
[vagrant@centos2 ~]$ cat info.txt
Juan Navarro Maldonado | centos2 | Practica7
[vagrant@centos2 ~]$ cd devel/test2/
[vagrant@centos2 test2]$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/vagrant/devel/test2/.git/
[vagrant@centos2 test2]$ echo "Primer commit" > README
[vagrant@centos2 test2]$ git add *
[vagrant@centos2 test2]$ git commit -m "Primer commit"
Author identity unknown

*** Please tell me who you are.

Run

  git config --global user.email "you@example.com"
  git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'vagrant@centos2.(none)')
[vagrant@centos2 test2]$ git config user.email "juannavarrom@correo.ugr.es"
[vagrant@centos2 test2]$ git user.name "Juan Navarro Maldonado"
git: 'user.name' is not a git command. See 'git --help'.
[vagrant@centos2 test2]$ git config user.name "Juan Navarro Maldonado"
[vagrant@centos2 test2]$ git commit -m "Primer commit"
[master (root-commit) 12092de] Primer commit
1 file changed, 1 insertion(+)
create mode 100644 README
[vagrant@centos2 test2]$
```


- Creación del repositorio remoto en centos1

```
vagrant@centos1:~/test2.git
[vagrant@centos1 ~]$ cat info.txt
Juan Navarro Maldonado | centos1 | practica7
[vagrant@centos1 ~]$ cd test2.git/
[vagrant@centos1 test2.git]$ git init --bare
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/vagrant/test2.git/
[vagrant@centos1 test2.git]$
```

- Conectar y realizar push desde el repositorio local

```
vagrant@centos2:~/devel/test2
[vagrant@centos2 test2]$ cat ~/info.txt
Juan Navarro Maldonado | centos2 | Practica7
[vagrant@centos2 test2]$ git remote add origin vagrant@centos1:/home/vagrant/test2.git
[vagrant@centos2 test2]$ git push -u origin main
error: src refspec main does not match any
error: failed to push some refs to 'centos1:/home/vagrant/test2.git'
[vagrant@centos2 test2]$ git push -u origin master
vagrant@centos1's password:
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 234 bytes | 234.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To centos1:/home/vagrant/test2.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
[vagrant@centos2 test2]$
```

- Cambios en la carpeta local y commit al repositorio remoto

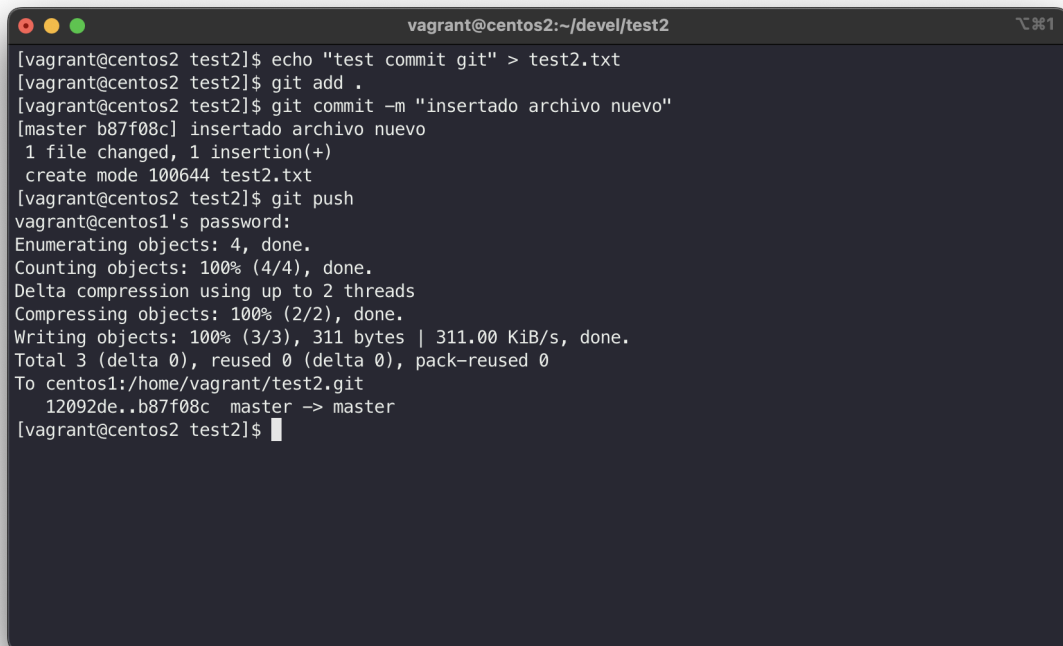

```
vagrant@centos2:~/devel/test2
[vagrant@centos2 test2]$ echo "test commit git" > test2.txt
[vagrant@centos2 test2]$ git add .
[vagrant@centos2 test2]$ git commit -m "insertado archivo nuevo"
[master b87f08c] insertado archivo nuevo
1 file changed, 1 insertion(+)
 create mode 100644 test2.txt
[vagrant@centos2 test2]$ git push
vagrant@centos1's password:
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 311 bytes | 311.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To centos1:/home/vagrant/test2.git
 12092de..b87f08c  master -> master
[vagrant@centos2 test2]$
```


3.- Copias de seguridad con Kopia mediante SSH

- Instalación de Kopia CLI

```
vagrant@centos2:~$ cat info.txt
Juan Navarro Maldonado | centos2 | Practica7
[vagrant@centos2 ~]$ sudo rpm --import https://kopia.io/signing-key
[vagrant@centos2 ~]$ sudo cat <<EOF | sudo tee /etc/yum.repos.d/kopia.repo
[Kopia]
name=Kopia
baseurl=http://packages.kopia.io/rpm/stable/\$basearch/
gpgcheck=1
enabled=1
gpgkey=https://kopia.io/signing-key
EOF
[Kopia]
name=Kopia
baseurl=http://packages.kopia.io/rpm/stable/\$basearch/
gpgcheck=1
enabled=1
gpgkey=https://kopia.io/signing-key
[vagrant@centos2 ~]$ sudo yum install kopia
Kopia
2.6 kB/s | 2.4 kB    00:00
Dependencies resolved.
=====
Package                Architecture      Version           Repository        Size
=====
Installing:
kopia                  x86_64            0.18.2-1          Kopia             16 M
=====
Transaction Summary
=====
Install 1 Package

Total download size: 16 M
Installed size: 50 M
Is this ok [y/N]: y
Downloading Packages:
kopia-0.18.2.x86_64.rpm
9.1 MB/s | 16 MB    00:01
-----
Total
9.0 MB/s | 16 MB    00:01
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      :                                1/1
  Installing     : kopia-0.18.2-1.x86_64         1/1
  Verifying      : kopia-0.18.2-1.x86_64         1/1
Installed:
```

- Creación del directorio test3

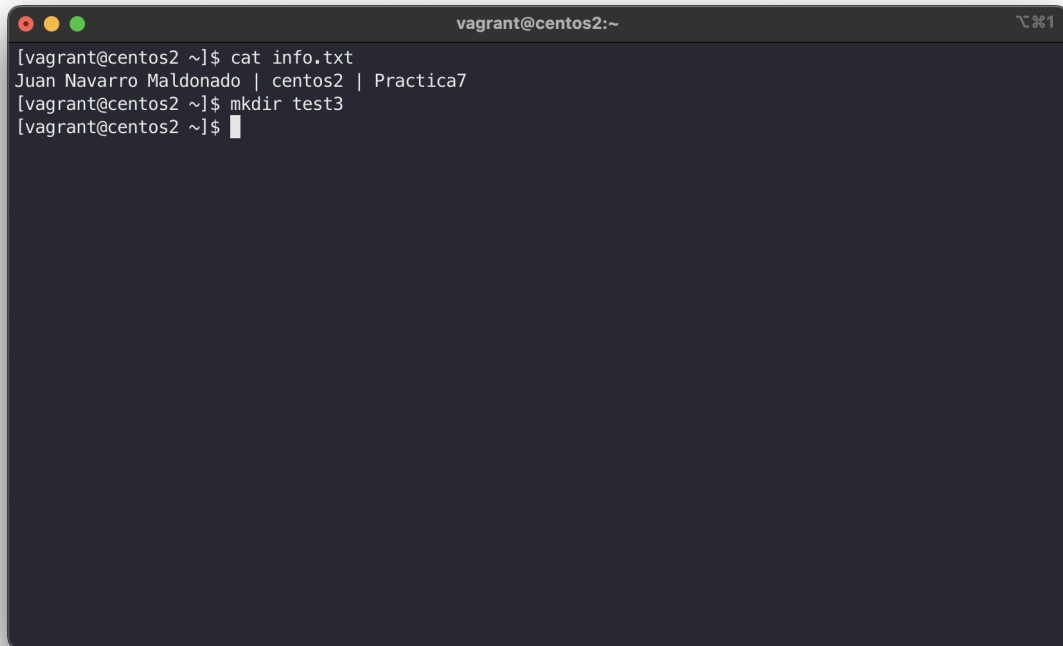A terminal window titled 'vagrant@centos2:~' with standard macOS window controls (red, yellow, green buttons) in the top-left corner. The terminal shows the following commands and output:

```
[vagrant@centos2 ~]$ cat info.txt
Juan Navarro Maldonado | centos2 | Practica7
[vagrant@centos2 ~]$ mkdir test3
[vagrant@centos2 ~]$
```

The cursor is at the end of the last line, ready for the next command.

- Creemos el repositorio en centos2

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ ls  
devel  info.txt  test1  test3  
[vagrant@centos2 ~]$ kopia repository create filesystem --path=/home/vagrant/test3  
Enter password to create new repository:  
Re-enter password for verification:  
Initializing repository with:  
  block hash:      BLAKE2B-256-128  
  encryption:      AES256-GCM-HMAC-SHA256  
  key derivation:   scrypt-65536-8-1  
  splitter:        DYNAMIC-4M-BUZZHASH  
Connected to repository.  
  
NOTICE: Kopia will check for updates on GitHub every 7 days, starting 24 hours after first use.  
To disable this behavior, set environment variable KOPIA_CHECK_FOR_UPDATES=false  
Alternatively you can remove the file "/home/vagrant/.config/kopia/repository.config.update-info.json"  
.  
  
Retention:  
  Annual snapshots:      3  (defined for this target)  
  Monthly snapshots:     24  (defined for this target)  
  Weekly snapshots:      4  (defined for this target)  
  Daily snapshots:       7  (defined for this target)  
  Hourly snapshots:      48  (defined for this target)  
  Latest snapshots:      10  (defined for this target)  
  Ignore identical snapshots: false (defined for this target)  
Compression disabled.  
  
To find more information about default policy run 'kopia policy get'.  
To change the policy use 'kopia policy set' command.  
  
NOTE: Kopia will perform quick maintenance of the repository automatically every 1h0m0s  
and full maintenance every 24h0m0s when running as vagrant@centos2.  
  
See https://kopia.io/docs/advanced/maintenance/ for more information.  
  
NOTE: To validate that your provider is compatible with Kopia, please run:  
  
$ kopia repository validate-provider  
  
[vagrant@centos2 ~]$
```

- Iniciamos el servidor Kopia en centos2

```
vagrant@centos2:~/test3
[vagrant@centos2 test3]$ cat ~/info.txt
Juan Navarro Maldonado | centos2 | Practica7
[vagrant@centos2 test3]$ kopia server start --address=0.0.0.0:51515 --insecure

Server will allow connections from users whose accounts are stored in the repository.
User accounts can be added using 'kopia server user add'.

SERVER ADDRESS: http://[::]:51515
Open the address above in a web browser to use the UI.
^CShutting down HTTP server ...
[vagrant@centos2 test3]$ kopia server user add vagrant@centos1
Enter new password for user vagrant@centos1:
Re-enter password for verification:

Updated user credentials will take effect in 5-10 minutes or when the server is restarted.
To refresh credentials in a running server use 'kopia server refresh' command.

[vagrant@centos2 test3]$ kopia server start --address=0.0.0.0:51515 --insecure

Server will allow connections from users whose accounts are stored in the repository.
User accounts can be added using 'kopia server user add'.

SERVER ADDRESS: http://[::]:51515
Open the address above in a web browser to use the UI.
█
```

- Instalamos Kopia en centos1

```
vagrant@centos1:~$ kopia --version
-bash: kopia: command not found
[vagrant@centos1 ~]$ rpm --import https://kopia.io/signing-key
error: can't create transaction lock on /var/lib/rpm/.rpm.lock (Permission denied)
error: https://kopia.io/signing-key: key 1 import failed.
[vagrant@centos1 ~]$ sudo rpm --import https://kopia.io/signing-key
[vagrant@centos1 ~]$ sudo cat <<EOF | sudo tee /etc/yum.repos.d/kopia.repo
[Kopia]
name=Kopia
baseurl=http://packages.kopia.io/rpm/stable/\$basearch/
gpgcheck=1
enabled=1
gpgkey=https://kopia.io/signing-key
EOF
[Kopia]
name=Kopia
baseurl=http://packages.kopia.io/rpm/stable/\$basearch/
gpgcheck=1
enabled=1
gpgkey=https://kopia.io/signing-key
[vagrant@centos1 ~]$ sudo yum install kopia kopia-ui -y
Kopia
2.4 kB/s | 2.4 kB    00:01
Dependencies resolved.
```

Package	Arch	Version	Repository	Size
Installing:				
kopia	x86_64	0.18.2-1	Kopia	16 M
kopia-ui	x86_64	0.18.2-1	Kopia	185 M
Installing dependencies:				
ModemManager-glib	x86_64	1.20.2-1.el9	baseos	335 k
adobe-source-code-pro-fonts	noarch	2.030.1.050-12.el9.1	baseos	832 k
adwaita-cursor-theme	noarch	40.1.1-3.el9	appstream	650 k
adwaita-icon-theme	noarch	40.1.1-3.el9	appstream	12 M
alsa-lib	x86_64	1.2.12-1.el9	appstream	523 k
at-spi2-atk	x86_64	2.38.0-4.el9	appstream	87 k
at-spi2-core	x86_64	2.40.3-1.el9	appstream	195 k
atk	x86_64	2.36.0-5.el9	appstream	292 k
avahi-glib	x86_64	0.8-21.el9	appstream	15 k
bluez-libs	x86_64	5.56-6.el9	baseos	85 k
bubblewrap	x86_64	0.4.1-8.el9	baseos	50 k
cairo	x86_64	1.17.4-7.el9	appstream	660 k
cairo-gobject	x86_64	1.17.4-7.el9	appstream	19 k
checkpolicy	x86_64	3.6-1.el9	appstream	353 k
colord-libs	x86_64	1.4.5-4.el9	appstream	229 k
composefs-libs	x86_64	1.0.5-1.el9	appstream	61 k
cups-libs	x86_64	1:2.3.3op2-31.el9	baseos	263 k
desktop-file-utils	x86_64	0.26-6.el9	appstream	74 k
exempi	x86_64	2.6.0-0.2.20211007gite23c213.el9	appstream	525 k

- Conectar con el token generado al servidor kopia
- Verificación estado repositorio
- En centos1 creamos el directorio para la copia de seguridad
- Hacemos la copia de seguridad
- Verificamos las snapshots
- Restauración de archivos desde el repositorio

4.- Instalación del servidor Minio para Objetos S3

- Instalación de Docker en centos1 y configuración de Minio

```
vagrant@centos1:~  
[vagrant@centos1 ~]$ cat info.txt  
Juan Navarro Maldonado | centos1 | practica7  
[vagrant@centos1 ~]$ sudo dnf config-manager --add-repo https://download.docker.com/linux/rhel/docker-ce.repo  
Adding repo from: https://download.docker.com/linux/rhel/docker-ce.repo  
[vagrant@centos1 ~]$ sudo yum -y install docker-ce-cli containerd.io  
CentOS Stream 9 - BaseOS                31 kB/s | 15 kB    00:00  
CentOS Stream 9 - AppStream              33 kB/s | 16 kB    00:00  
CentOS Stream 9 - Extras packages        75 kB/s | 18 kB    00:00  
Docker CE Stable - x86_64               102 kB/s | 26 kB    00:00  
Dependencies resolved.  
=====
```

Package	Arch	Version	Repository	Size
Installing:				
containerd.io	x86_64	1.7.23-3.1.el9	docker-ce-stable	43 M
docker-ce-cli	x86_64	1:27.3.1-1.el9	docker-ce-stable	7.9 M
Installing dependencies:				
container-selinux	noarch	3:2.233.0-1.el9	appstream	56 k
Installing weak dependencies:				
docker-buildx-plugin	x86_64	0.17.1-1.el9	docker-ce-stable	14 M
docker-compose-plugin	x86_64	2.29.7-1.el9	docker-ce-stable	13 M

```
Transaction Summary  
=====
```


```
vagrant@centos1:~  
[vagrant@centos1 ~]$ cat info.txt  
Juan Navarro Maldonado | centos1 | practica7  
[vagrant@centos1 ~]$ sudo systemctl start docker  
[vagrant@centos1 ~]$ sudo systemctl status docker  
● docker.service - Docker Application Container Engine  
   Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; preset:   
   Active: active (running) since Wed 2024-11-27 21:37:12 UTC; 9s ago  
 TriggeredBy: ● docker.socket  
     Docs: https://docs.docker.com  
    Main PID: 6258 (dockerd)  
      Tasks: 9  
     Memory: 24.6M  
        CPU: 434ms  
    CGroup: /system.slice/docker.service  
           └─6258 /usr/bin/dockerd -H fd:// --containerd=/run/containerd/cont  
  
Nov 27 21:37:11 centos1 systemd[1]: Starting Docker Application Container Engin  
Nov 27 21:37:11 centos1 dockerd[6258]: time="2024-11-27T21:37:11.645676333Z" le  
Nov 27 21:37:11 centos1 dockerd[6258]: time="2024-11-27T21:37:11.763206827Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.373935001Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.422082849Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.422214454Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.422251486Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.422381877Z" le  
Nov 27 21:37:12 centos1 dockerd[6258]: time="2024-11-27T21:37:12.479243368Z" le
```

```
vagrant@centos1:~  
[vagrant@centos1 ~]$ cat info.txt  
Juan Navarro Maldonado | centos1 | practica7  
[vagrant@centos1 ~]$ sudo systemctl status docker  
○ docker.service - Docker Application Container Engine  
   Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; preset: >  
   Active: inactive (dead)  
TriggeredBy: ○ docker.socket  
   Docs: https://docs.docker.com  
[vagrant@centos1 ~]$ sudo systemctl start docker  
[vagrant@centos1 ~]$ docker run -p 9000:9000 \  
--name minio1 \  
-v /home/vagrant/minio_data:/data \  
-e "MINIO_ACCESS_KEY=CpDrandom20" \  
-e "MINIO_SECRET_KEY=scretkcpd20CY" \  
minio/minio server /data &  
[1] 4587  
[vagrant@centos1 ~]$ Unable to find image 'minio/minio:latest' locally  
latest: Pulling from minio/minio  
55360c0b72d6: Pull complete  
f2f8f30a646a: Pull complete  
3440aa9567dd: Pull complete  
4414594dd510: Pull complete  
c1cc85e2de65: Pull complete  
d57a4fe62ee8: Pull complete  
48e0cffc0f68: Pull complete
```

- Configuración del cliente para acceder al servidor Minio desde centos2

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ wget https://dl.min.io/client/mc/release/linux-amd64/mc  
--2024-11-27 21:42:32-- https://dl.min.io/client/mc/release/linux-amd64/mc  
Resolving dl.min.io (dl.min.io)... 178.128.69.202, 138.68.11.125  
Connecting to dl.min.io (dl.min.io)|178.128.69.202|:443... connected.  
HTTP request sent, awaiting response... 200 OK  
Length: 27996312 (27M) [application/octet-stream]  
Saving to: 'mc'  
  
mc                               100%[=====>] 26.70M  547KB/s   in 62s  
  
2024-11-27 21:43:35 (443 KB/s) - 'mc' saved [27996312/27996312]  
  
[vagrant@centos2 ~]$ chmod +x mc  
[vagrant@centos2 ~]$ ./mc alias set minio http://centos1:9000 CpDrandom20 scretk  
cPd20CY  
mc: Configuration written to `/home/vagrant/.mc/config.json`. Please update your  
access credentials.  
mc: Successfully created `/home/vagrant/.mc/share`.  
mc: Initialized share uploads `/home/vagrant/.mc/share/uploads.json` file.  
mc: Initialized share downloads `/home/vagrant/.mc/share/downloads.json` file.  
Added `minio` successfully.  
[vagrant@centos2 ~]$
```

- Probamos a acceder al servidor creando un bucket

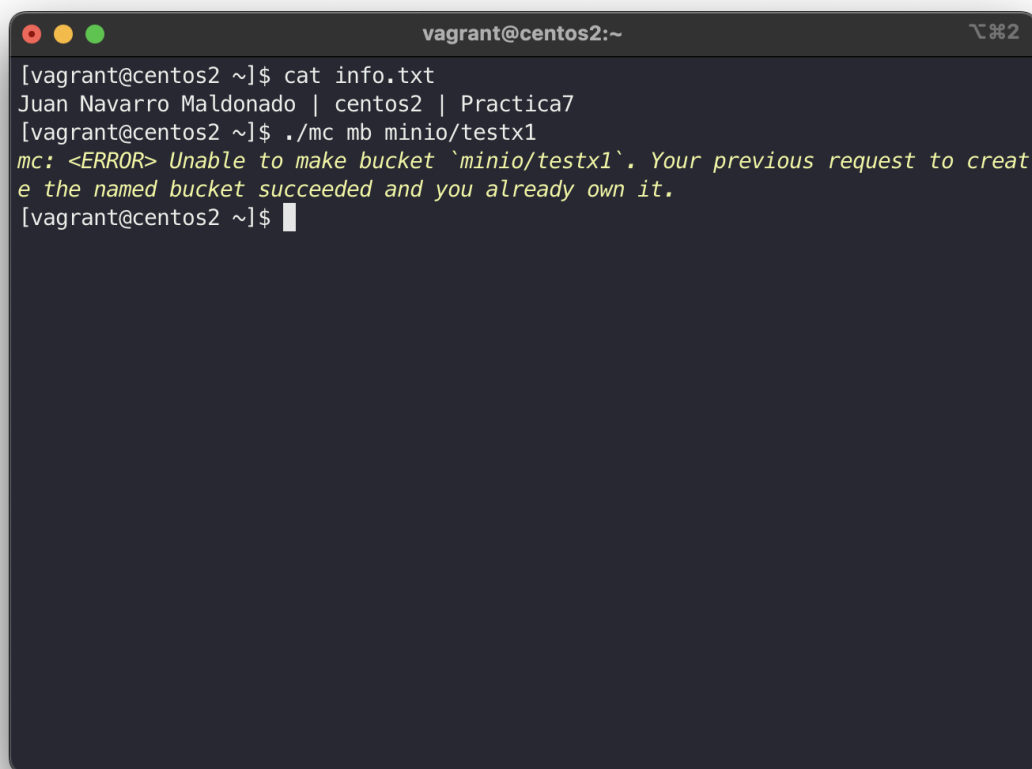

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ ./mc mb minio/testx1  
mc: <ERROR> Unable to make bucket `minio/testx1`. Your previous request to creat  
e the named bucket succeeded and you already own it.  
[vagrant@centos2 ~]$
```

El error que aparece es porque ya lo había creado previamente y a la hora de hacer la captura limpiando la pantalla, no me sale el mensaje de confirmacion en su lugar me dice que ya está creado con anterioridad.

- Crear subdirectorios es con la misma orden mb

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ ./mc mb minio/testx1  
mc: <ERROR> Unable to make bucket `minio/testx1`. Your previous request to create the named bucket succeeded and you already own it.  
[vagrant@centos2 ~]$ ./mc mb minio/testx1/d1  
Bucket created successfully `minio/testx1/d1`.  
[vagrant@centos2 ~]$ ls  
devel info.txt mc test1 test3  
[vagrant@centos2 ~]$ ls mc  
mc  
[vagrant@centos2 ~]$
```

- Copiar ficheros al contenedor

```
vagrant@centos2:~  
[vagrant@centos2 ~]$ cat info.txt  
Juan Navarro Maldonado | centos2 | Practica7  
[vagrant@centos2 ~]$ ls  
devel fichero_minio.txt info.txt mc test1 test3  
[vagrant@centos2 ~]$ touch f1  
[vagrant@centos2 ~]$ ./mc cp f1 minio/testx1  
0 B / ? |  
[vagrant@centos2 ~]$ ./mc cp fichero_minio.txt minio/testx1  
..._minio.txt: 24 B / 24 B | 1.09 KiB/s 0s  
[vagrant@centos2 ~]$
```

- Probar la conexión desde nuestro ordenador al cliente S3

El primer paso es instalar minio, en mi caso lo he hecho siguiendo los mismos pasos que para centos2

```
juan@MacBook-Pro-de-Juan:~/Documents/github/CPD/practica7/newvagrant
Conectando con dl.min.io (dl.min.io)[138.68.11.125]:443... conectado.
Petición HTTP enviada, esperando respuesta... 200 OK
Longitud: 28820624 (27M) [application/octet-stream]
Grabando a: «mc»

mc                               100%[=====] 27,49M  9,01MB/s   en 3,1s

2024-11-27 22:58:03 (9,01 MB/s) - «mc» guardado [28820624/28820624]

> ~/Documents/github/CPD/practica7/newvagrant ✓ 5s 22:58:03
chmod +x mc

> ~/Documents/github/CPD/practica7/newvagrant ✓ 22:58:09
./mc alias set minio http://192.168.56.11:9000 CpDrandom20 scretkcPd20CY

mc: Configuration written to `/Users/juan/.mc/config.json`. Please update your access credentials.
mc: Successfully created `/Users/juan/.mc/share`.
mc: Initialized share uploads `/Users/juan/.mc/share/uploads.json` file.
mc: Initialized share downloads `/Users/juan/.mc/share/downloads.json` file.
Added `minio` successfully.

> ~/Documents/github/CPD/practica7/newvagrant ✓ 22:58:28
```

- Probamos listando el fichero que hemos subido a nuestro servidor de que todo se ha configurado correctamente



A terminal window on a macOS system. The title bar shows the user 'juan@MacBook-Pro-de-Juan' and the current directory '~/Documents/github/CPD/practica7/newvagrant'. The terminal has a dark background with light blue text. The first command prompt shows the user in the directory '~/.mc' running 'cat minio/testx1/fichero_minio.txt', which outputs 'Fichero de prueba minio'. The second command prompt shows the user back in the directory '~/.mc' with a cursor waiting for input. On the right side of the terminal, there are two status bars: the first shows a green checkmark, a left arrow, the time '22:59:40', and a magnifying glass icon; the second shows a green checkmark, a left arrow, the time '23:00:20', and a magnifying glass icon.

```
juan@MacBook-Pro-de-Juan:~/Documents/github/CPD/practica7/newvagrant
> ~/.mc cat minio/testx1/fichero_minio.txt
Fichero de prueba minio
> ~/.mc
```

5.- Utilizar el servidor Minio S3 como servidor para Kopia