- 1. Ran 2D-RZ\_finiteStrain\_test.i for more complex meshes and longer times
  - changed dt in test file (too large for model beyond one time step)
  - changed PressureTM BC (from factor to function)
  - also edited 3D-RZ\_finiteStrain\_test.i
  - marked 3D (fake/axisymmetric 3D) test 'heavy' to be skipped on run\_tests
  - re-golded, merged on github (issue #5584)
- 2. Created master SM vs TM list
  - all categories (bcs, materials, auxkernels, etc.)
  - missing items, replaced items, etc.
- 3. Added save\_in\_disp\_r/z
  - aux variables to save r/z displacement residuals
  - file changed: TensorMechanicsAxisymmetricRZAction.C
    - to match TensorMechanicsAction.C
  - added test: tensor\_mechanics/tests/2D\_geometries/2D-RZ\_finiteStrain\_resid.i & gold
  - merged on github (issue #5610)
- 4. Compared timing of TM J2 tests vs LSH SM tests
  - added j2\_plasticity\_vs\_LSH directory in modules/combined/tests
    - side-by-side comparison of TM vs SM for the same problem (no hardening)
    - time discrepancy for plastic steps (TM 5-7x slower with 4x4x4 mesh) (Figure 1)
  - merged on github (issue #5628)
- 5. Worked on TM timing by adding special J2 case
  - wrote radial return map and radial consistent tangent operator for J2 plasticity
  - worked with Andy to move radial return map to J2 userObject and set up for future custom return maps & consistent tangent operators for other userObjects
  - timing vastly improved (TM now less than 2x slower)
    - previously: 5.57s SM vs 34.21s TM (ten time steps)
    - o now: 3.49s SM vs 5.75s TM (21.28s SM vs 35.56s TM for 50 time steps)
  - created j2\_hard2\_exp.i test for J2 with exponential hardening
    - plotted vm stress vs intnl to check exponential relationship, correct (Figure 2)
    - plotted same for j2\_hard1 (constant/no hardening), correct (Figure 3)
  - waiting for Andy then PR & merge on github (issue #5628 & #5667)
    - still needs to be re-golded, j2\_hard2\_exp.i to be added to test (csvdiff?)
- 8. Coded multi surface plasticity, n internal parameters per model
  - started work on this but did not finish
    - o most coding done, getting segfault / out-of-bounds
    - o branch (CMPS\_multi\_ics) pushed to my repo but no issue or PR
- 7. Created flow charts
  - mapped inheritance for TM classes
    - FiniteStrain Materials (to be deprecated?) (Figure 4)
    - ComputeStress Materials (Figure 5)
    - UserObjects :: TMHardeningXX & TMPlasticXX (Figure 6)
    - traced example jacobian function (df\_dintnl) to show userObject incorporation via MultiPlasticityRawComponentAssembler and \_f[model]->function() (Figure 7)

## 8. Wiki needs to be updated

- wiki > physics modules > tensor mechanics > plasticity and return map
  - FiniteStrainMultiPlasticity Material mentioned (should be ComputeMultiPlasticityStress?)
  - should add something about implementing custom return maps & ctos via userObjects after PR & merge

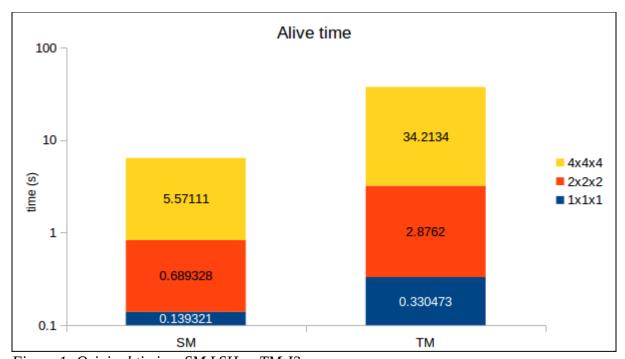


Figure 1: Original timing, SM LSH vs TM J2

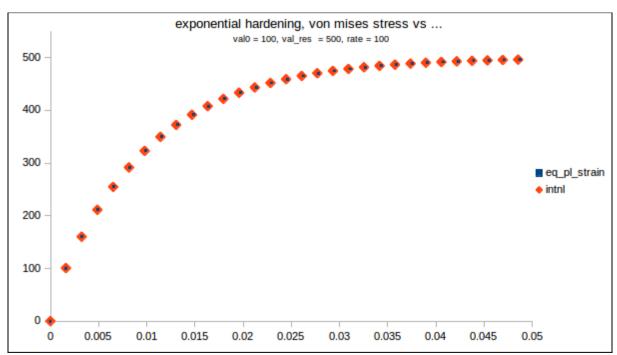


Figure 2: Von-mises stress vs equivalent plastic strain and vs internal parameter for TM/J2 with exponential hardening

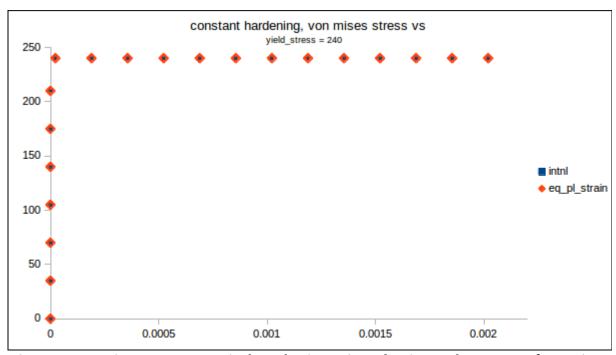


Figure 3: Von-misses stress vs equivalent plastic strain and vs internal parameter for TM/J2 with constant hardening

## Tensor Mechanics Strain Materials Inheritance Structure

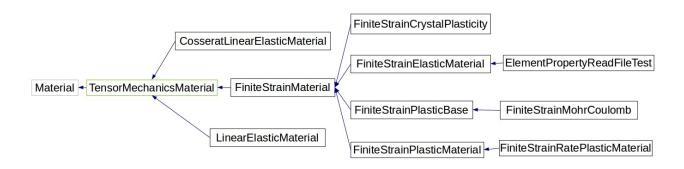


Figure 4: Tensor mechanics FiniteStrain material class inheritance, to be deprecated in favor of userObjects and ComputeStressBase

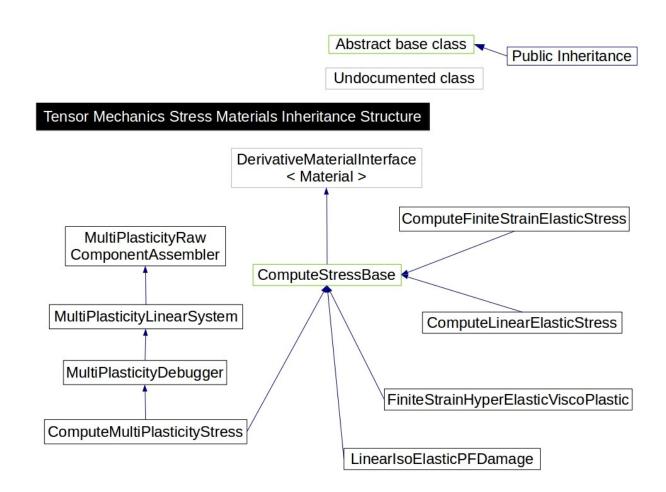


Figure 5: Tensor mechanics ComputeStress material class inheritance, used with userObjects

## Tensor Mechanics UserObjects Inheritance Structure

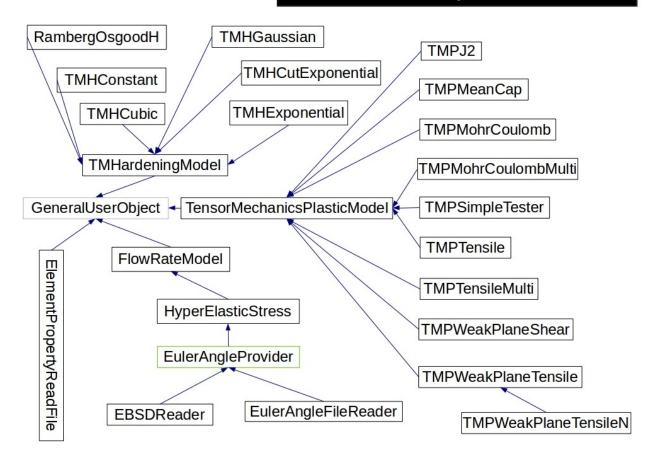


Figure 6: Tensor mechanics userObjects class inheritance, plasticity and hardening models, used with ComputeStress materials

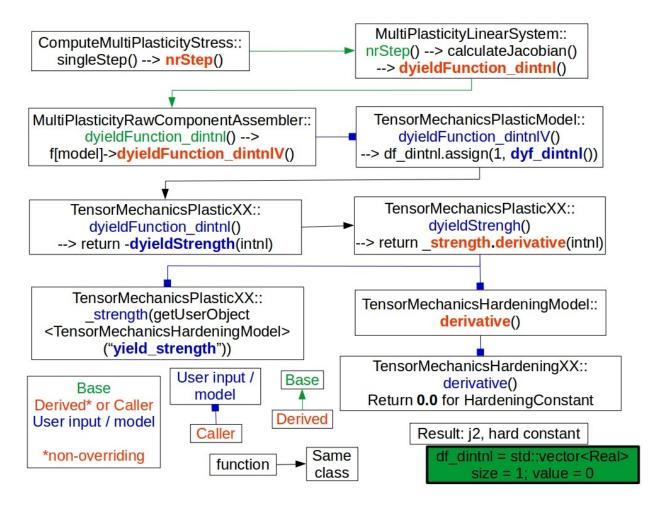


Figure 7: Function calling to evaluate calculateJacobian() in ComputeMultiPlasticityStress::nrStep() via userObjects

## Figure 7 explanation:

- 1. ComputeMultiPlasticityStress::nrStep() calls calculateJacobian, which calls dyieldFunction\_dintnl, which is defined in CMPS's base class, MultiPlasticityRawComponentAssembler.
- 2. MPRCA::dyieldFunction dintnl calls f[model]->dyielfFunction dintnlV, which accesses userObjects.
- 3. TensorMechanicsPlsaticModel::dyieldFunction dintnlV calls TensorMechanicsPlasticJ2::dyieldFunction intnl.
- 4. J2::dyf dintnl calls dyieldStrength, within J2.
- 5. J2::dyieldStrength returns strength.derivative.
- 6a. strength is the user-defined variable "yield strength" from J2.
- 6b. .derivative comes from TMHardeningModel::derivative, which calls TMHardeningConstant::derivative, which returns zero.