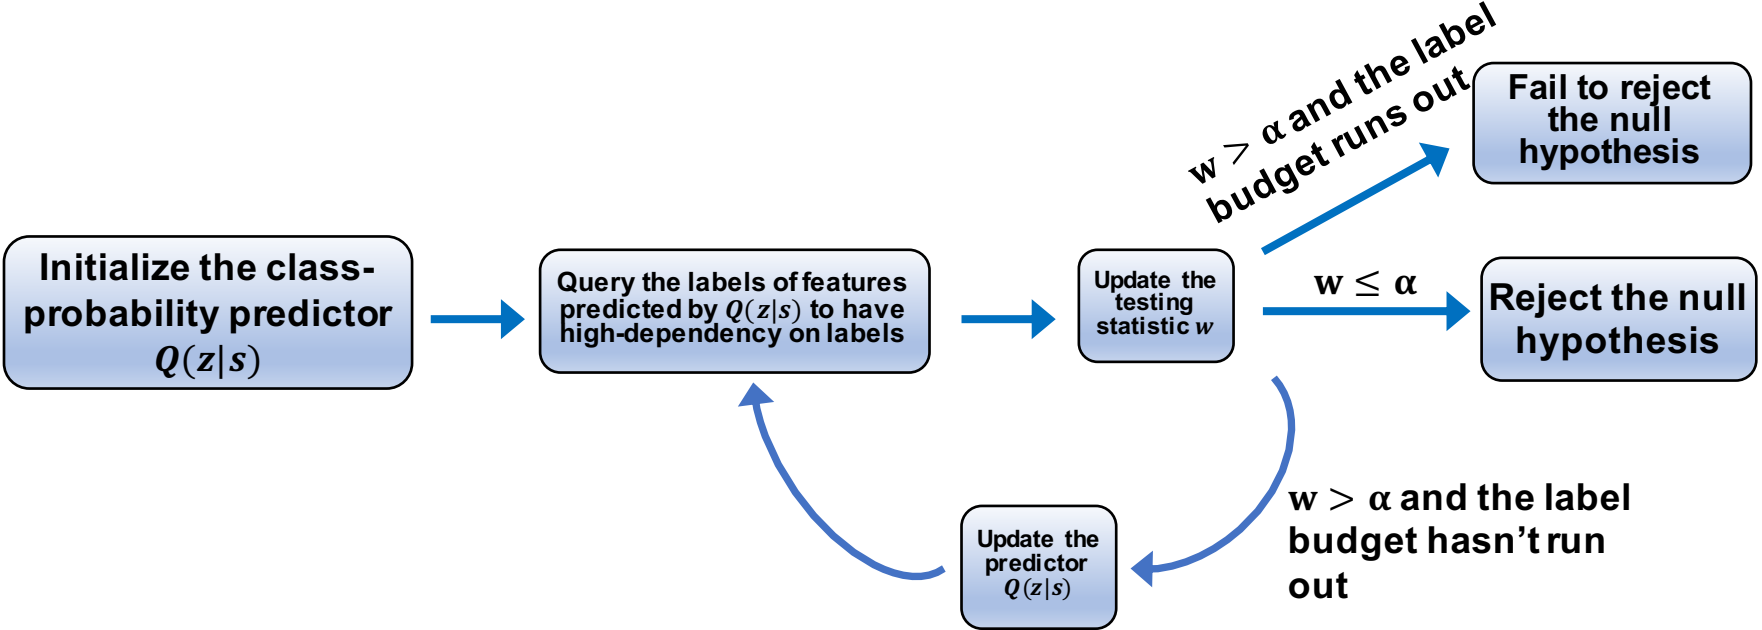
Initialize the class-probability predictor $Q(z|s)$
Query the labels of features predicted by $Q(z|s)$ to have high-dependency on labels
Update the testing statistic w
$w > \alpha$ and the label budget runs out
Fail to reject the null hypothesis
$w \leq \alpha$
Reject the null hypothesis
$w > \alpha$ and the label budget hasn't run out
Update the predictor $Q(z|s)$