


Validation Score

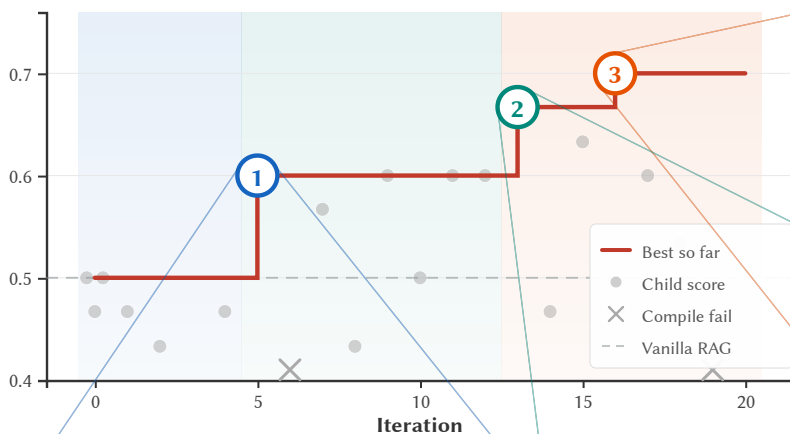

Iter 16

0.67 → 0.70

Penalize mismatches; generate task checklist

```
if q_primary == rec["primary_obj"]:
    score += 4.0
else:
    + score -= 1.8 wrong-obj penalty
    if q_action != rec["action_type"]:
        + score -= 0.4 action mismatch

+ lines.append("Exec checklist:") checklist
+ lines.append(f"- Only: {q_ent[:4]}")
+ lines.append("- Never substitute")
+ if q_state and q_primary:
+ lines.append(f"- {q_state}")
```

Iter 05

0.50 → 0.60

Store observations as structured task records

```
- lessons.append(...) dump all
- facts.append(...)
- return ALL stored text no retrieval

+ record = { typed fields
+ "target_object": ...,
+ "state": ...,
+ "tool": ...,
+ "target": ...,
+ "tokens": tokenize(blob) bag-of-words
+ }

+ sig = sha1(text).hexdigest() dedup
+ if sig in self.seen: return
```

Iter 13

0.60 → 0.67

Increase weights for key fields; drop LLM call

```
if q_obj == rec["primary_object"]:
    - score += 6
    + score += 8 object ID most critical
elif q_obj in rec["tokens"]:
    - score += 2
    + score += 4 doubled
if q_loc == rec["target_location"]:
    - score += 3
    + score += 5 location ↑
if q_state == rec["required_state"]:
    - score += 4
    + score += 5

- return llm_synthesize(top) LLM call
+ return format_top4(ranked) no LLM ✓
```