

**OBA-LH**

**Catalog Code**

**g W6019**

**Large Optical Rails have a tube-shaped cross section with fins extending radially in four directions.**

- Carriers for large optical rails can be mounted on all four surfaces, top, lateral sides (two faces) and bottom, using these fins.

## Guide

- Contact our Division for information on ruler scale installation and custom lengths.


## Specifications

Primary material: Aluminum  
Finish: Black Anodized

| Part Number       | A<br>[mm] | B<br>[mm] | Weight<br>[kg] |
|-------------------|-----------|-----------|----------------|
| <b>OBA-500LH</b>  | 500       | —         | 3.3            |
| <b>OBA-1000LH</b> | 1,000     | —         | 6.6            |
| <b>OBA-1500LH</b> | 1,500     | —         | 9.9            |
| <b>OBA-2000LH</b> | 2,000     | —         | 13.2           |

## Outline Drawing

OBA-LH

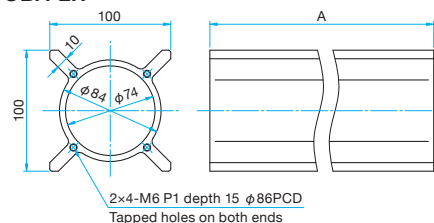

## OBT-LH/LUU



**Catalog Code**

**g W6020**

**Designed to be directly mounted on top of a vibration isolator or optical laboratory bench using M6 or 1/40 – 20 bolts.**

- 100mm-wide, 25mm-high optical rails have a low optical axis and light weight.


## Guide

- Contact our Division for information on ruler scale installation and custom lengths.




## Outline Drawing

-  Hexagon socket head cap screw  
M6x18...7 screws/17 screws  
Hex wrench for M6...1 screw

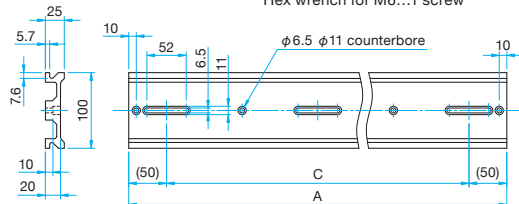**OBT-1000LH/2000LH**


-  Hexagon socket head cap screw  
M6×18...13 screws/23 screws  
Hex wrench for M6...1 screw

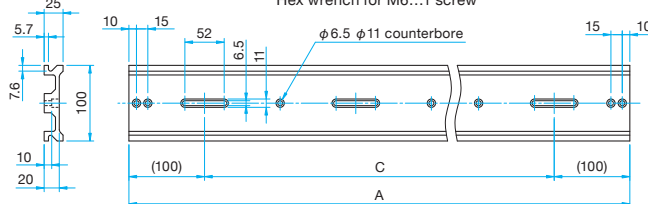

C: 100mm pitch between the centers of slotted hole and counterbore

**OBT-LUU**

-  Hexagon socket head cap screw 1/4-20UNCx3/4...3 screws/6 screws/9 screws/11 screws


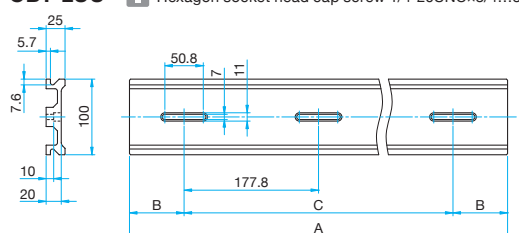


## Specifications

Primary material: Aluminum  
Finish: Black Anodized

| Part Number |             | A     | B    | C      |          | Weight<br>[kg] |
|-------------|-------------|-------|------|--------|----------|----------------|
| METRIC      | INCH        | [mm]  | [mm] | METRIC | INCH     |                |
| OBT-500LH   | OBT-500LUU  | 500   | 72.2 | 100× 4 | 177.8× 2 | 1.7            |
| OBT-1000LH  | OBT-1000LUU | 1,000 | 55.5 | 100× 8 | 177.8× 5 | 3.5            |
| OBT-1500LH  | OBT-1500LUU | 1,500 | 38.8 | 100×14 | 177.8× 8 | 5.2            |
| OBT-2000LH  | OBT-2000LUU | 2,000 | 111  | 100×18 | 177.8×10 | 7.0            |

## Option Scale Installation and Custom Lengths



- Custom lengths not listed in the catalog are available.
- To order surface finishing of the cut surfaces, specify “with reprocessing”.
- For the OBA-L and OBA-SH series, to use tapped holes on the lateral side after cutting, specify “with tapped holes”.
- Since the price varies depending on the specifications such as one-side cut, both-sides cut, with tapped holes etc., contact our Sales Division for more information.